

SCREW REMOVAL

Screw Removal Pliers, Rapid Screw Extractor, etc.

2

SCREW
REMOVAL

SCISSORS

Combination Scissors, Cable Shears, etc.

10

SCISSORS

NIPPERS

Micro Nippers, Micro Cutter, Diagonal Nippers, Plastic Nippers, etc.

15

NIPPERS

PLIERS

Miniature Pliers, Long Nose Pliers, Combination Pliers, E-Ring Pliers, etc.

20

PLIERS

CRIMPING AND STRIPPING

Handy Crimp Tool, Universal Crimping Pliers, Pin Extractor, Wire Strippers, etc.

24

CRIMPING
STRIPPING

TWEEZERS

Tweezers, Titanium Tweezers, ESD Plastic-Tipped Tweezers, etc.

32

TWEEZERS

SCREWDRIVERS

Master Grip Drivers, Pro-Use Drivers, Stubby Drivers, Offset Ratchet Drivers, etc.

37

SCREW
DRIVERS

SPECIAL DRIVERS

Mobile Phone Drivers, Nut Drivers, Hex Drivers, Ceramic Alignment Screwdrivers, etc.

42

SPECIAL
DRIVERS

WRENCHES

Smart Monkey Wrench, Ball Point Hex Wrench Set, Socket Wrench Set, etc.

50

WRENCHES

CUTTING AND PROCESSING

Taper Reamer, Vise, Jeweller's Saw, Jet Black Files, etc.

55

CUTTING
PROCESSING

SETS AND CASES

Maintenance Kits, Tool Kits, Electronics Kits, Aluminium Cases, Parts Boxes, etc.

59

SETS
CASES

SOLDERING EQUIPMENT

Soldering Irons, Kotelyzers, Desoldering Tool, Solder Sucker, Digital Multimeter, Loupes, etc.

69

SOLDERING
EQUIPMENT

ESD PRODUCTS AND CHEMICALS

Anti-Static Service Kit, Dust-Free Gloves, Conductive Colored Mat, Rust Remover, etc.

80

ESD
CHEMICALS



Screw Removal

7-inch ZAURUS is Here!



Handy Size & Slender Head


PZ-77



Maximize the gripping power from the grip ends



9.5mm Side Cutter for Steel wire and Copper wire



Spring



Comes with a Protective Cap

Screw Head Size
 $\phi 3 \sim 9.5$ mm



SCREW REMOVAL PLIERS SERIES

Remove all kinds of screws, fasteners, pins, etc. easily!

PZ-22

PATENTED TECHNIQUE

SCREW EATER

Finally, the world-standard model of the Screw Removal Pliers!

- Vertical serrations bite and grip a screw head without slippage.
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Also ideal for situations when the correct size or type of screwdriver is not available.
- Serrated side teeth lined consecutively, inter-meshed with each other. Good for holding a thin plate securely.
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off during heavy duty use.



Vertical serrations




T-shaped handle

Vertical Serrations (PAT.)
You can remove damaged screws in seconds. Just grip and turn!




Inter-meshed Teeth (PAT.)
Need to hold a thin material?
Get a firm grip!

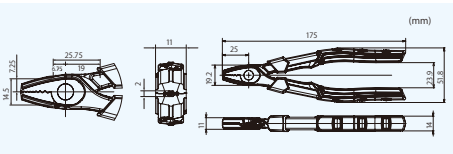


Item No.	Material	Hardness	Wgt. (g)
PZ-22	Carbon Steel	HRC60±2	165

How does it work?

Ordinary pliers



"Vertical serrations"



Specially-designed jaws generate gripping power.

"Maximizes the friction"



Perfect fitting serrations maximize friction with no slippage.

■ Screw head size


Top Jaws
$\phi 3 \sim \phi 9.5\text{mm}$

PZ-78

SCREW REMOVAL PLIERS EL

Side Cutting Pliers, Must for electricians!

- 21mm-long side cutting blades, ideal for cutting 3-core flat cable, too
- Crimper for bare terminals (AWG16~12)
- Eccentric high leverage structure, powerful cutting and gripping
- Robust jaws with unique screw extractor offset from the center and horizontal serrations to hold a tie band etc.



■ Screw head size

Top Jaws
$\phi 3 \sim \phi 12\text{mm}$

Item No.	Material	Hardness	Wgt. (g)
PZ-78	Carbon Steel	HRC60±2	350



PRODUCT VIDEO



SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS


WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS



Remove all kinds of screws, fasteners, pins, etc. easily!

PZ-58

SCREW REMOVAL PLIERS GT



The best selling Screw Removal Pliers in the whole world!!

- Elaborately-designed serration fits the profile of screw head at the best angle.
- Also good for Truss head screw. *Truss: Lower-profile dome head
- with wire cutter (Capacity: copper wire ϕ 3.2mm)
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off during heavy duty use.



PZM-58

PLIERS MASK FOR PZ-58

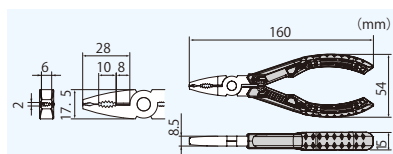

Item No.	Material	Hardness	Wgt. (g)
PZ-58	Carbon Steel	HRC60 \pm 2	130

■ Screw head size

Top Jaws
$\phi 3 \sim \phi 9.5\text{mm}$


PRODUCT VIDEO



PZ-59

SCREW REMOVAL PLIERS RX

- Removes screws with stripped or rusted heads or stubborn fasteners in seconds
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Inter-meshed side teeth even hold a very thin plate securely, no slippage!
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off during heavy duty use.



Item No.	Material	Hardness	Wgt. (g)
PZ-59	Carbon Steel	HRC60 \pm 2	300

■ Screw head size

Top Jaws
$\phi 3 \sim \phi 12\text{mm}$



PRODUCT VIDEO



PZ-60

SCREW REMOVAL PLIERS Z

- Long nose ideal for a hard-to-reach small screw up to 5.5mm
- Vertical serrations bite a screw head without slippage.
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Inter-meshed teeth to hold even a thin plate securely, so no slippage.
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off the handle.

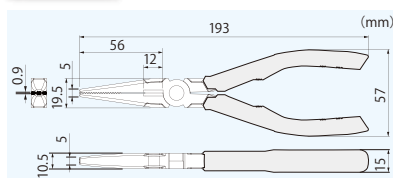

Item No.	Material	Hardness	Wgt. (g)
PZ-60	Carbon Steel	HRC60 \pm 2	180


■ Screw head size

Top Jaws
$\phi 2 \sim \phi 5.5\text{mm}$ (Head Height < 2.2mm)




PZ-55**SCREW REMOVAL PLIERS****The basic Screw Removal Pliers: Powerful and simple!**

- Serrated jaw inside bites screw head firm and unfastens it with no slip.
- More powerful torque than screwdriver toward screw & nut
- Also ideal for rotating nut in case of no space to drive wrench in arc
- ※ For screw whose head was damaged and transformed
- ※ For screw whose slot on the head is special, unique or tamper-proof
- ※ For screw frozen with rust





Item No.	Material	Hardness	Wgt.(g)
PZ-55	S58C	HRC56±2	125

■ Screw head size

Top Jaws
 $\phi 3 \sim \phi 8 \text{mm}$


PZ-56**SCREW REMOVAL PLIERS XP****Feel the powerful and extensive work !!**

- Slip joint function makes it possible to select two points of opening jaws.
- Reverse cross-jointed structure to reduce the load which is imposed at joint bolt while unfastening work.



Item No.	Material	Hardness	Wgt.(g)
PZ-56	Cr-V	HRC56±2	187

■ Screw head size

Top Jaws
 $\phi 3 \sim \phi 10 \text{mm}$

PZ-57**SCREW REMOVAL PLIERS M2****Slender jaws and pocket-sized body**


- Ideal for unfastening frozen or special screws of tiny size
- ESD-Safe handle made of thermoplastic Elastomer (TPR) featuring comfortable grip



with strap hole


ESD-Safe handle
($1 \times 10^6 \sim 10^7 \Omega/\text{sq}$)



Top Jaws Side Jaws

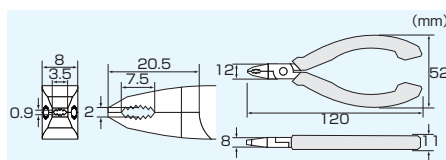

Item No.	Material	Hardness	Wgt.(g)
PZ-57	S58C	HRC56±2	100

■ Screw head size


Top Jaws
 $\phi 2 \sim \phi 3.5 \text{mm}$



PCB



Hard Disk Drive



Damaged screw



Torx screw




ESD-SAFE


PZ-32

SCREW REMOVAL PLIERS JS

- Vertical serrations bite and grip a screw head without slippage
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Serrated side teeth lined consecutively, inter-meshed with each other
- Black oxide finish to increase rust-resistance!
- Owing to T-shaped forging handles, the handle sleeve will not twist or slip off during heavy duty use.

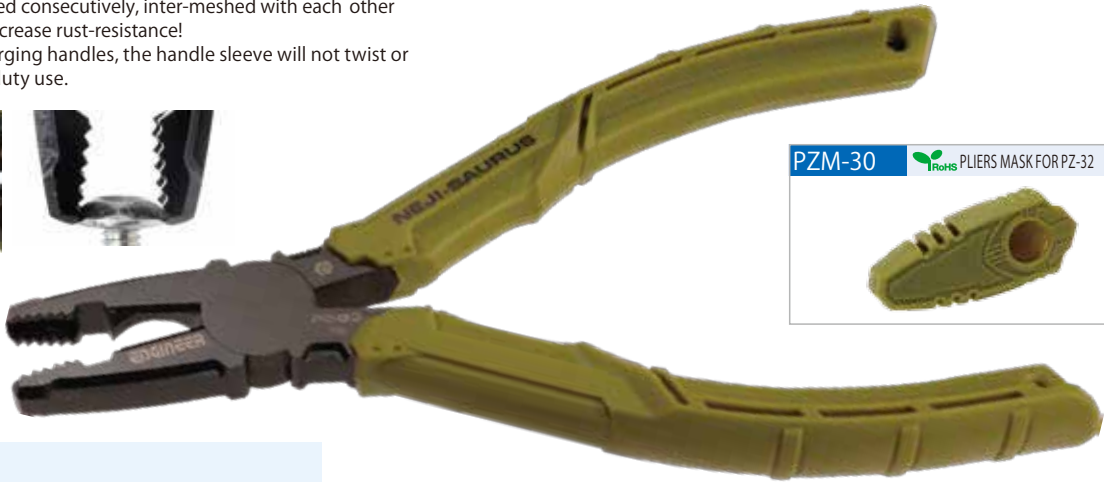

PZM-30 PLIERS MASK FOR PZ-32

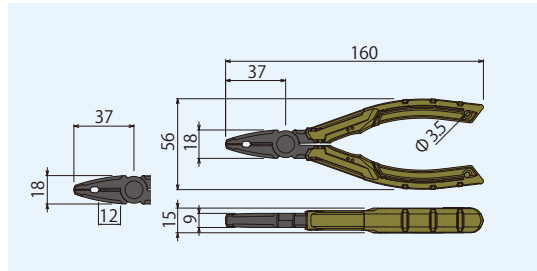

Inter-meshed, never let go.




Strap hole goes through the steel handle.



Item No.	Size	Material	Hardness	Cutting Capacity	Wgt.	Safety Hole
PZ-32	160mm	Body:Carbon Steel Handles:TPR	HRC60±2	φ3.2mm (copper wire)	125g	φ3.5mm



■ Screw head size

Top Jaws
 φ3~φ9.5mm

PZ-64•65•66

SCREW REMOVAL LOCKING PLIERS

- Vertically serrated jaws bite a screw head while locking it securely. It helps to optimize your hand strength for twisting off stubborn screws.
- Also good for Truss head screw. *Truss: Lower-profile dome head
- Quick release mechanism, just open the handles to unlock the gripping jaws
- Rubber handles provide you with a comfortable grip.

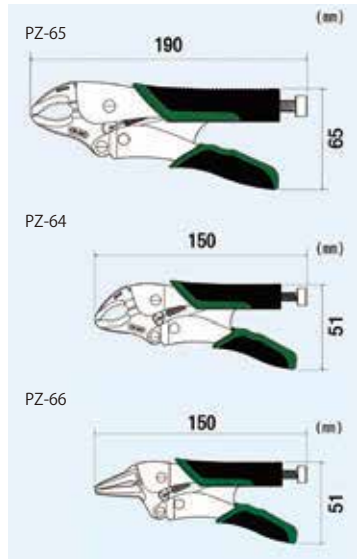


PZ-65



PZ-64



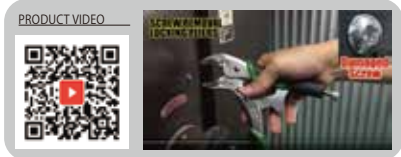


PZ-66



Item No.	Max.Jaws	Holdable Round Bar	O.A. Length	Hardness (Jaws)	Wgt.	Material
PZ-64	38mm	Max. φ28mm	150mm	HRC57±3	205g	Body:Cr-Mo Handles:TPR
PZ-65	48mm	Max. φ40mm	190mm		400g	
PZ-66		Max. φ8mm	150mm		210g	

■ Screw head size

Item No.	Top Jaws
PZ-64	 φ3~φ9.5mm
PZ-65	 φ3~φ9.5mm
PZ-66	 φ3~φ5.5mm


PZ-81**SLIP JOINT PLIERS**

With unique screw removal jaws, must for plumbers and mechanics

- Quick adjustment of opening jaws - Push to open and just slide up to grip
- High leverage 260mm long body with wide opening jaws (Max. 60mm)
- Holds round bars, square bars, hex. nuts, sheet metals, etc.
- Vertically-serrated teeth inside the jaws for removing a stripped or rusty screw



※10-step adjustment of jaw capacity



■ Screw head size

Top Jaws	
	φ3~φ9.5mm

Item No.	Material	Hardness	Wgt.(g)
PZ-81	Carbon Steel	HRC58±3	320

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS**KS-34****SCREW EMERGENCY TOOL KIT**

The all-in-one solution for your screw troubles!

- Screw Eater + Rapid Screw Extractor with 3 bits
 - Lightweight and stylish bundle case
- *Turn to page 08 for more information on the Rapid Screw Extractor



Compact and lightweight!

■ Contents

Item No.	Description
PZ-22	Screw Eater
DBZ-50G	Handle Grip for DBZ (Green)
DBZ-51	⊕#2 (Press & Twist type bit)
DBZ-52	⊕#2 (Strike & Turn type bit)
DBZ-57	⊕#1 (Press & Twist type bit)
	Bundle case

Item No.	Case Size (When unfold)	Wgt.
KS-34	380×220mm	394g

PDS-01**SCREW REMOVAL TOOL KIT**

Screw Removal Pliers GT with Mask
+ Rapid Screw Extractor with 5 bits
in a compact heavy duty case

*Turn to page 08 for more information on the Rapid Screw Extractor

■ Contents

Item No.	Description
PZ-58	Screw Removal Pliers GT
PZM-58	Pliers Mask for PZ-58
DBZ-50B	Handle Grip For DBZ (Black)
DBZ-51	⊕ #2 (Press & Twist type bit)
DBZ-52	⊕ #2 (Strike & Turn type bit)
DBZ-53	Hex socket screw(●:2.5-3.0mm)
DBZ-54	Hex socket screw(●:4.0mm)
DBZ-56	Hex socket screw(●:5.0mm)
	Bit holder



Item No.	Case Size	Wgt.
PDS-01	300×60×190mm	896g

PGT-03 GT PACK(PAULOWNIA BOX)

The perfect gift for tool lovers!

- The Screw Removal Pliers GT and the Combination Scissors GT in a beautiful box made of paulownia wood.



■ Contents

Item No.	Description
PZ-58	Screw Removal Pliers GT
PZM-58	Pliers Mask for PZ-58
PH-55	Combination Scissors GT

Item No.	Case Size	Wgt.
PGT-03	252×132×32mm	372g


DBZ-60G**RoHS RAPID SCREW EXTRACTOR**

The unique extracting tool, especially designed to remove damaged countersunk screws!

- Special screw driver for screw extraction
- No power supply or drilling required
- 2 different bits of 6.35mm Hex. Driver for adequate approaches
- High-torque handle grip
- Shock-absorbable rubber sleeve included

Contents:

- Handle Grip for DBZ(Green)(DBZ-50G)
- ⊕#2 Press & Twist type bit (DBZ-51)
- ⊕#2 Strike & Turn type bit (DBZ-52)
- Rubber Sleeve for DBZ-52

**PRODUCT VIDEO**


Item No.	Material	Wgt.
DBZ-60G	Bit: Carbon Steel Sleeve: TPR Grip: ABS, Nylon	135g

DBZ-50B**RoHS HANDLE GRIP FOR DBZ(BLACK)**


High-torque handle grip







Item No.	Material	Width	Wgt.
DBZ-50B	Grip: ABS, Nylon	100mm	83g

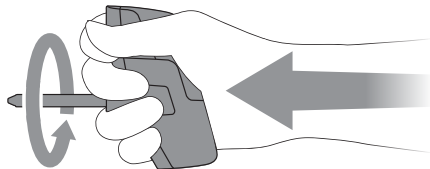How to**Press & Twist type** (for slightly damaged screws)

- 1) Insert the bit into the handle grip.
- 2) Place the bit tip into the screw head, then scrape away burrs in the recess by twisting it back and forth lightly.
*Do not attempt to hit the bit with a hammer.
- 3) After you feel the bit tip catches the corner of recess, give a jerk counterclockwise while pressing firmly downward.

**Strike & Turn type** (for heavily damaged screws)

- 1) Clean out any steel chips left in the screw recess.
- 2) Fix the rubber sleeve to the Strike & Turn bit and position the tip in the recess.
- 3) Strike the end of the bit with a hammer to stick the tip into the recess.
- 4) Make sure the bit is self-standing upright, and then affix the grip onto the bit.
*Do not hit the grip with a hammer.
- 5) Give a jerk counterclockwise while pressing firmly downward.

Screw types**Countersunk****Pan head****Dome head****Hex**

(Unit in mm)

DBZ-51~65




REPLACEMENT AND OPTIONAL BITS FOR DBZ-60G

Press & Twist type	Strike & Turn type
 <p>■ DBZ-51</p>  <p>■ DBZ-57</p> <p>Slightly damaged Philips screws</p>	 <p>■ DBZ-52</p>  <p>Heavily damaged Philips screws</p>
<p>■ DBZ-62</p>  <p>■ DBZ-63</p>  <p>■ DBZ-64</p>  <p>■ DBZ-65</p>  <p>Slightly damaged Hex screws</p>	<p>■ DBZ-53</p>  <p>■ DBZ-54</p>  <p>Heavily damaged Hex screws</p> <p>■ DBZ-56</p> 

Item No.	Screw type/size	Bit type	Length	Wgt.
DBZ-51	⊕#2	Press & Twist type	105mm	24g
DBZ-52		Strike & Turn type		27g
DBZ-53	Hex socket screw (●: 2.5-3.0mm)	Strike & Turn type		26g
DBZ-54	Hex socket screw (●: 4.0mm)	Strike & Turn type		
DBZ-56	Hex socket screw (●: 5.0mm)	Strike & Turn type		
DBZ-57	⊕#1	Press & Twist type		25g
DBZ-58	⊕#0	Press & Twist type		
DBZ-62	Hex socket screw (●: 2.0mm)	Press & Twist type		27g
DBZ-63	Hex socket screw (●: 2.5-3.0mm)	Press & Twist type		
DBZ-64	Hex socket screw (●: 4.0mm)	Press & Twist type		
DBZ-65	Hex socket screw (●: 5.0mm)	Press & Twist type		

PRODUCT VIDEO



DBZ-62~65 can be used with your power driver

DBZ-20



SOCKET SCREW EXTRACTOR SET

Set of DBZ-62, 63, 64 & 65 in a plastic carrying case



- Works with 2~5mm (Across flats) stripped hex socket screws
- Also useful as an extractor for other screw drives such as Phillips, Torx, etc. as per the following steps :
 - ① Drill a pilot hole in the center of screw head.
 - ② Select the appropriate size of DBZ-62/63/64/65 (2mm, 3mm, 4mm or 5mm), which corresponds to the pilot hole (the diameter of the drill used).
 - ③ Apply a tip of the extractor and spin it counterclockwise while pressing downward. A power driver can be also used.






Scissors


PH-57

COMBINATION SCISSORS DP

- 2-in-1 anti-slip serrations and U-shaped blade
- 3mm-thick durable blades, made of stainless steel

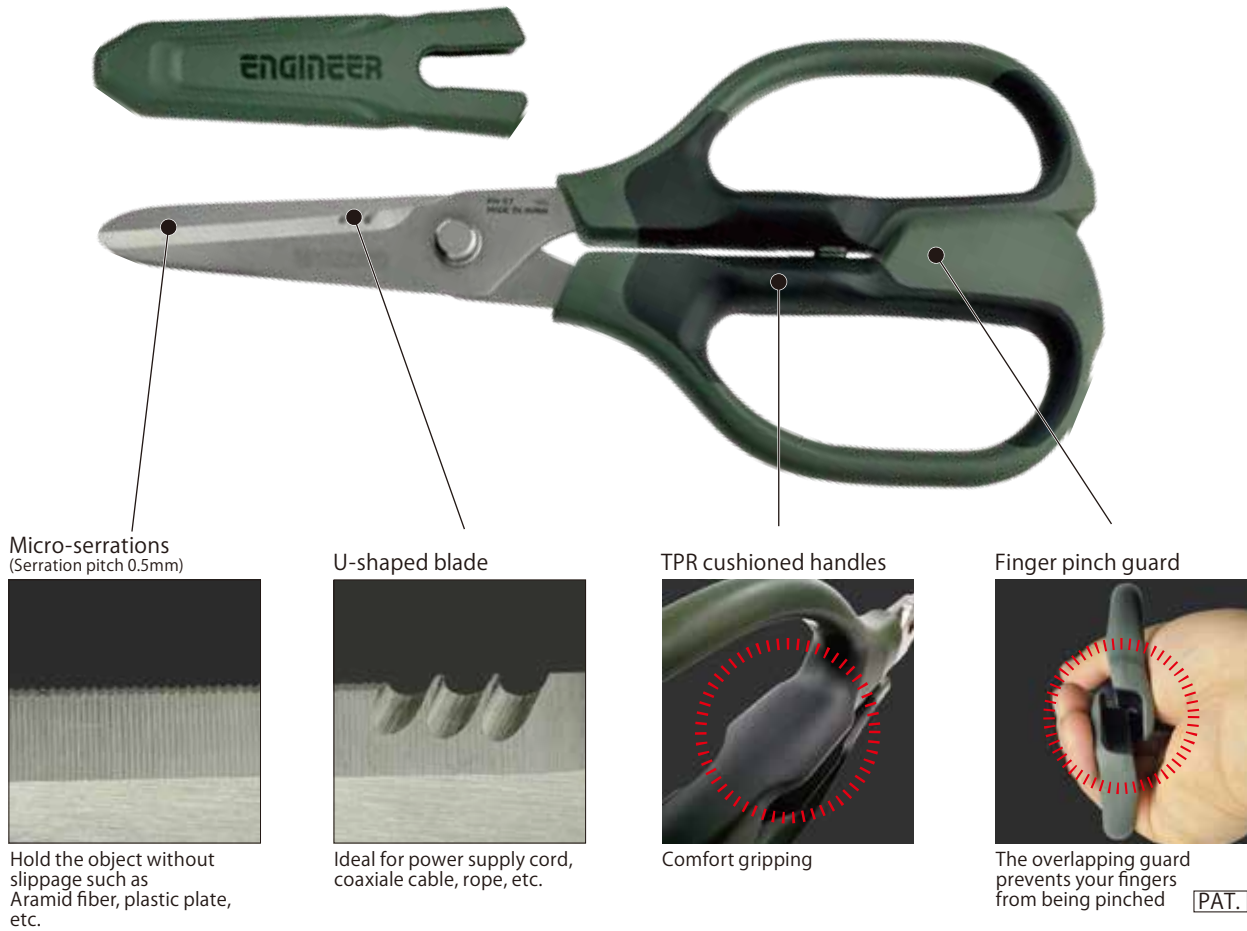


Cutting capacity (Reference only)

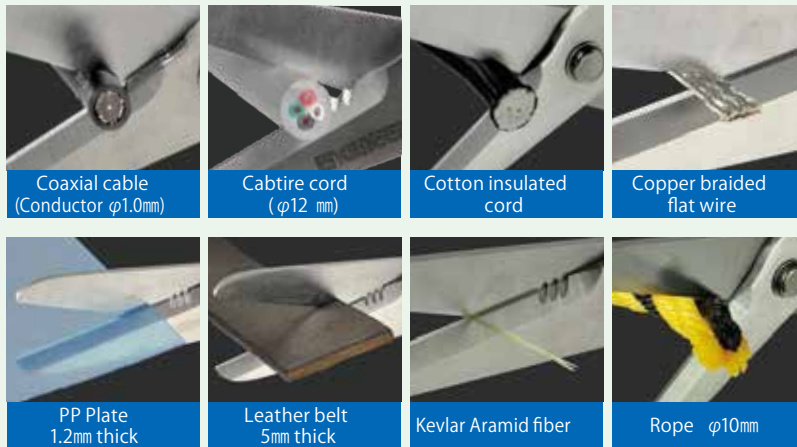

- ※ Do not apply Copper or Steel wire to the Micro-serration to keep the life of main blades.
- ※ Heat-treated or specially-hardened wire is not applicable for cutting. It may damage the blades.

Item No.	Size	Hardness	Material	Wgt.
PH-57	210mm	HRC56 \pm 2	Blades: Stainless Steel Handles: ABS & TPR Cap: ABS	136g

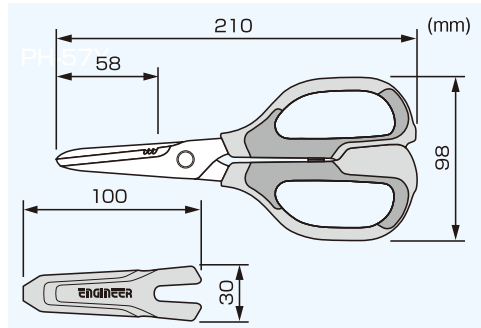SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

PH-56R•PH-56G•PH-56Y



COMBINATION SCISSORS MP

- 2-in-1 anti-slip serrations and U-shaped blade
- 2.5mm-thick blades, made of stainless steel




Nano-serrations
(Serration pitch 0.3mm)




Hold the object without slippage such as Aramid fiber, plastic plate, etc.

U-shaped blade



Ideal for power supply cord, coaxial cable, rope, etc.

Finger pinch guard




The overlapping guard prevents your fingers from being pinched **[PAT.]**

Cutting capacity (Reference only)



※ Do not apply Copper or Steel wire to the Micro-serration to keep the life of main blades.
 ※ Heat-treated or specially-hardened wire is not applicable for cutting. It may damage the blades.

Color variations

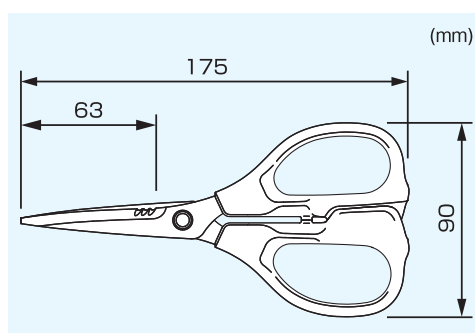


Item No.	Size	Hardness	Material	Wgt.
PH-56R	175mm	HRC56+2	Blades: Stainless Steel Handles: ABS	75g
PH-56G				
PH-56Y				

PH-50

COMBINATION SCISSORS

2-in-1 Unique cutting blade

- Trimming various objects which you could not cut with ordinary scissors such as nylon fiber, cabtire cord, etc.
- Fine and flush cut of copper wire or conductor in finishing even compared with the counterparts cut with cutting pliers
- Ideal for professional electricians as well as for hobby use.

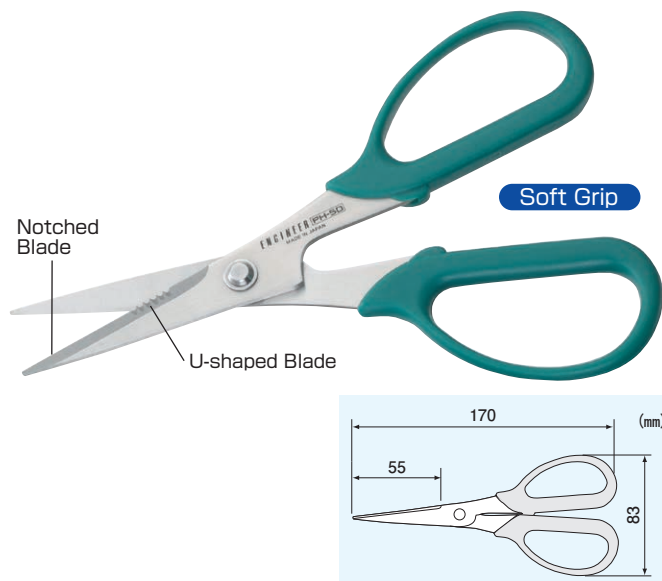


Notched Blade



Trimming Nylon or Kevlar fiber without slipping

Notched blades prevent the object from slipping



Kevlar



Copper braided flat wire



Aluminum sheet

PH-50 Notched Blade Cutting Capacity


Nylon/Kevlar fiber	Various types
Copper braided wire	0.5mm max.
Aluminum/Copper sheet	1.0mm max.
Plastic plate / PET	1.0mm max.

U-shaped Blade



Sharp cut against insulated cord with rubber or cotton braided


U-shaped notches hold cord firmly



Cabtire cord



Copper wire



Insulated cord

PH-50 U-shaped Blade Cutting Capacity

Copper wire	φ1.5mm max.
Cabtire cord	Various types
Cotton braided cord	Various types
Cotton insulated cord	Various types

*Do not use U-shaped blade for cutting Aluminum or Copper sheet, which may damage the blade.

Item No.	Size	Hardness	Material	Wgt.
PH-50	170mm	HRC54±2	Handles:PE Blades:Stainless Steel	58g

PH-55

COMBINATION SCISSORS GT

4-in-1 Blade combination, Compact Body to Generate More Force!!

- Cut various materials cleanly
- Safely-designed and comfortable handles
- Blade cap with vent & drain holes

- Rust proof stainless steel body
- Applicable to professional users and hobbyist

Micro-serration
(Serration pitch 1.0mm)

Holds the object without slipping

Flat Blade



Smooth cutting not only of cloth but also of paper

Finger Pinch Guard

The overlapping guard prevents your fingers being pinched in the handles.
PAT.

Anti-slip Handle



You can grasp the outer rim of the handles safely when the work requires a strong grip.



INTERNATIONAL DESIGN EXCELLENCE AWARDS '12 FINALIST

S-shaped Design



The unique form transmits gripping power efficiently to the shears.

Wire Cutter



Handy cutting blades for copper or steel wire


Safety Box Opener



Convenient to open carton boxes with ease

Cutting Capacity (Reference)

Micro-serration		Wire Cutter	
Rope	Cabtire cord	Cotton insulated	Copper wire
φ10mm	φ9mm	φ8mm	φ1.6mm
Leather belt	CD-Card	Carpet	Wire
4mm thick	1.2mm thick	5mm thick	φ1.2mm

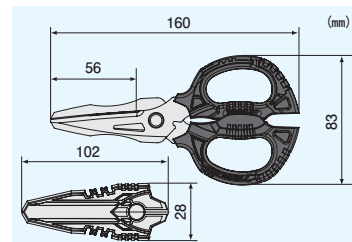

Item No.	Size	Hardness	Material	Wgt.
PH-55	160mm	HRC56±2	Cap & Handles:PBT Blades:Stainless Steel	120g

*Do not apply Copper or Steel wire to the Micro-serration to keep the life of main blades.
 *Heat-treated or specially-hardened wire is not applicable for cutting. It may damage the blades.

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES


SOLDERING EQUIPMENT

ESD CHEMICALS

PH-33•34

 ELECTRONIC SNIPS

- Ideal for delicate cutting for PCB related work.
- PH-33 (straight) / PH-34 (curved)
- Length: 145mm
- Material: Stainless Steel
- Serrated shears for anti-slipping

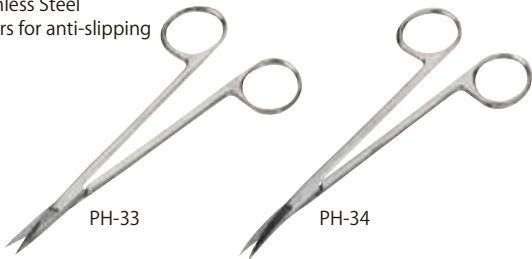

PZ-79

 SHEAR PLIERS


- Cuts PVC insulated 3-core wire easily with one hand.
- Cross-hatched jaws to hold a thin plate, tie band, etc.
- Vertically-serrated screw extractor inside the jaws
- With Crimper for bare terminals (AWG16~12)



Flat cable, PVC sheathed



Side Cutter PZ-79



2-way Non-slip jaws

PK-50•51

 CABLE SHEARS

- Makes a fine cut surface owing to the curved blades
- High leverage for easy operation



Vinyl Insulated




Cable Tire



Flat Cable



Coaxial Cable



■ Foremost Blades
Wire cutter suitable for copper wires

■ Main Blade (Rearmost)
Curved blades suitable for insulated cables,
make a fine cut surface.
Flat cables, Coaxial cables, Power supply cords,
LAN cables, etc. are also applicable.

Comparison of Cut Surface

Cable Shears




The curved blades can hold a cable securely and the shears mechanism enables you to make a cut surface finely.

Conventional Pliers



The pressure given from flat blades crushes a cable or it may slip sideways.




PRODUCT VIDEO





Item No.	Size	Hardness	Cutting Capacity			Wgt.
			Vinyl insulated Cable		Flat Cable	
PK-50	164mm	HRC58±4	9mm outside diameter	22 mm ²	φ 2.0mm×2core	150g
PK-51	212mm	HRC58±4	11mm outside diameter	38 mm ²	φ 2.0mm×3core	250g

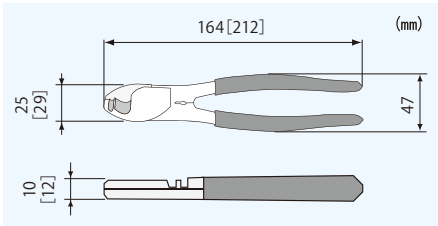

[]:PK-51

Nippers



NS & NZ SERIES

Features

- Our micro nippers are ideal for precise PCB work.
- Made of special steel and specially heat treated for excellent cutting capacity and durability.
- Flush cutting edge recommended for cutting copper and soft lead wires.
- Soft touch grip insulation and spring ensure long comfortable work.





- With opening angle adjuster or stopper

NS-03

RoHS MICRO NIPPERS

- Ideal for small PCB related work
- With opening angle adjuster
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire \varnothing 1.4mm





Size	A	B	C	D	E
125	128	52	13	7	14

NS-04

RoHS MICRO NIPPERS

- Ideal for small PCB related work
- With opening angle adjuster
- ESD-Safe handles made of Elastomer (TPR)
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire \varnothing 1.2mm




Size	A	B	C	D	E	F
115	120	50	13	7	14	11

NSX-04

RoHS MICRO NIPPERS

- Cost-saving simple structure
- With side stopper
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire \varnothing 1.2mm
- Especially for production line owing to economical and ecology package in poly bag





Size	A	B	C	D	E
115	117	51	13	7	14


NS-06

RoHS MICRO NIPPERS

- Undercut design featuring thin blade
- Ideal for precise PCB related work
- With opening angle adjuster
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire \varnothing 0.8mm



Under cut




Size	A	B	C	D	E
105	112	50	10	7	12

■ Nippers cutting capacities (Reference only)


Item No.	Commodity	Size	Copper wire		Steel wire (Ø)	Others	Page
			Solid (Ø)	Stranded (mm ²)			
NS-03	Micro Nippers	125	1.4	2			16
NS-04	Micro Nippers	115	1.2	2			16
NSX-04	Micro Nippers	115	1.2	2			16
NS-06	Micro Nippers	105	0.8				16
NZ-03	Chip Cutter	125	0.6				17
NZ-05	Chip Cutter	125	0.6			also applicable to plastic gate	17
NZ-12	Parallel Nippers	125	0.6				17
NZ-13	Parallel Nippers	125	0.6				17
NP-03	Plastic Nippers	125				Injection molding gate Ø3mm	19
NP-04	Plastic Nippers	150				Injection molding gate Ø3mm	19
NP-05	Plastic Nippers	115	0.8			Injection molding gate Ø3mm	19
NK-15	Diagonal Nippers	125	2.6	2	1.5		18
NK-16	Diagonal Nippers	150	3	2	1.9		18
NK-25	Diagonal Nippers	125	2.6	2	1.5	Stripping hole Ø1.2 & 1.6mm	18
NK-26	Diagonal Nippers	150	3	2	1.9	Stripping hole Ø1.2 & 1.6mm	18
NK-36	Diagonal Nippers	150	3.2		2	Vinyl insulated cable Ø1.6mm	18
NN-45	Slant Edge Nippers	125	2	2	1.2	Stripping hole Ø1.2 & 1.6mm	19
NN-46	Slant Edge Nippers	150	2.6	2	1.4	Stripping hole Ø1.2 & 1.6mm	19
NN-56	Slant Edge Nippers	150	2.6	2	1.4		19

NZ-03**CHIP CUTTER**



- Opening angle adjuster (Max. 5mm) with 1.5mm hex key wrench included
- Sharp & slender design of jaws for work on dense circuit board
- ESD-Safe handles made of Elastomer (TPR)
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire $\phi 0.6\text{mm}$
- Applications: Removal of chip resistance, IC, etc. on SMD

**NZ-05****CHIP CUTTER**


- Opening angle adjuster (Max. 5mm) with 1.5mm hex key wrench included
- Full-flush cut & slender design for work on circuit board
- ESD-Safe handles made of Elastomer (TPR)
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire $\phi 0.6\text{mm}$
- Applications: Leads of Dual In-line Package or Single In-line Package IC on SMD

**NZ-12G·13G****MICRO CUTTER****Full flush & super-fine cutting edge**

- Ideal to cut an IC lead of a narrow-pitch QFP or SOP with slender shears (0.3mm+0.3mm width at top)
- Flush cut of leads, prevents resist stripping or solder crack on a circuit board
- ESD-Safe handles made of Elastomer (TPR)
- Cutting capacity : Copper wire $\phi 0.6\text{mm}$
- Light weight of 45g only

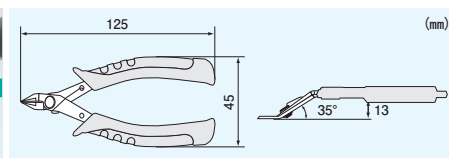**SHEARS & GRIP IN PARALLEL**



NZ-12G



NZ-12 : Normal Blade
Enables you to make flush cut of a lead easily so as to prevent resist stripping or solder crack on the circuit board



NZ-13G



NZ-13 : Reverse Blade
Enables you to cut IC lead in front of user with the best view while holding nippers vertically against circuit board

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING


SETS CASES

SOLDERING EQUIPMENT


ESD CHEMICALS

NK-15·16**DIAGONAL NIPPERS****Sharp & durable cutting for precision wiring work**


- With opening angle adjuster & coiled spring
- Material: S55C
- Hardness: HRC 58±4
- Capacity (copper wire) : NK-15 ϕ 2.6mm
NK-16 ϕ 3mm

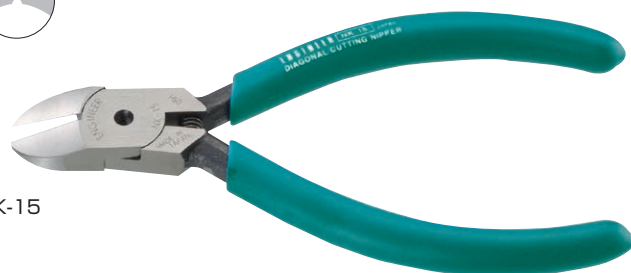


NK-15




NK-16

**NK-25·26****DIAGONAL NIPPERS****Precision cutter with wire stripper**


- With opening angle adjuster & coiled spring
- Stripping holes: ϕ 1.2 & 1.6mm
- Material: S55C
- Hardness: HRC 58±4
- Capacity (copper wire) : NK-25 ϕ 2.6mm
NK-26 ϕ 3mm

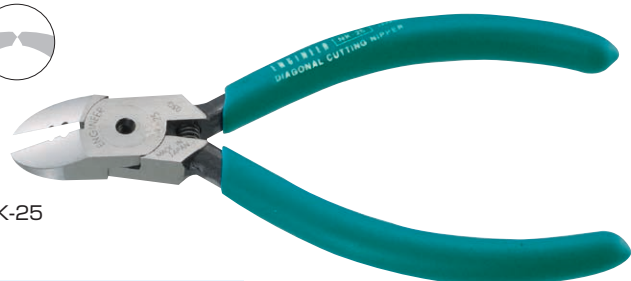


NK-25



NK-26

**NK-36****HEAVY DUTY DIAGONAL NIPPERS****Heavy-duty durable cutter**

- Material: S58C
- Hardness: HRC 60±4
- Capacity: copper wire ϕ 3.2mm




NN-45·46 IROHS SLANT EDGE NIPPERS

Professional type for sharp & easy use

JIS

- Stripping holes: ϕ 1.2 & 1.6mm
- Material: S58C
- Hardness: HRC 58 \pm 4

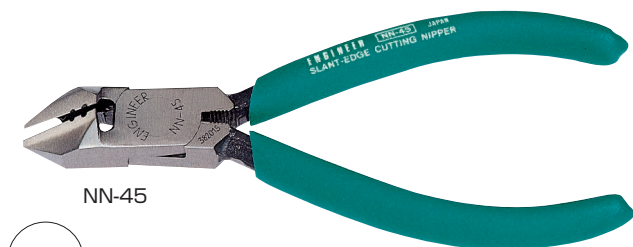

NN-45



(mm)						
Item No.	Size	A	B	C	D	E
NN-45	125	133	51	14	10	23
NN-46	150	159	51	16	11	26


Capacity

copper wire ϕ 2mmcopper wire ϕ 2.6mm**NN-56 IROHS SLANT EDGE NIPPERS**

Sharp cutting & easy handling

JIS

- Material : S58C
- Hardness : HRC 58 \pm 4
- Capacity : copper wire ϕ 2.6mm



(mm)					
Size	A	B	C	D	E
150	159	51	16	11	26

NP-03·04 IROHS PLASTIC NIPPERS


- Ideal for cutting plastic mold gates & burns
- Full-flush cutting edge
- With opening angle adjuster & coiled spring
- Material: S58C
- Hardness: HRC 58 \pm 4



NP-03



NP-04



(mm)						
Item No.	Size	A	B	C	D	E
NP-03	125	130	54	14	8	17
NP-04	150	152	55	16	10	20

NP-05 IROHS PLASTIC NIPPERS


Tapered and slender head for work in restricted area



- Ideal for cutting and trimming various gates of injection molding
- Also capable of cutting thin copper wire (ϕ 0.8mm max.)
- ESD-Safe handles made of Elastomer (TPR)
- With side stopper & coiled spring
- Material: S58C
- Hardness: HRC 59 \pm 3



NP-05



(mm)						
Item No.	Size	A	B	C	D	E
NP-05	115	123	52	11	7	12

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

Pliers



PS-01**MINIATURE LONG NOSE PLIERS**


Ideal for precision work

- Jaws with inside serration
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire $\phi 2\text{mm}$

Point section



Spring



Item No.	Size	A	B	C	D	E
PS-01	125	132	51	14	8	37

(mm)

PS-03**MINIATURE NEEDLE NOSE PLIERS**

Ideal for forming work

- Jaws without serration
- ESD-Safe handles made of Elastomer (TPR)
- Material: S58C
- Hardness: HRC 46±4



Point section



Spring

**PS-04****MINIATURE FLAT NOSE PLIERS**



- Jaws without serration
- ESD-Safe handles made of Elastomer (TPR)
- Material: S58C
- Hardness: HRC 46±4



Point section



Spring



Item No.	Size	A	B	C	D	E	F
PS-03	125	141	55	11	8	38	11
PS-04	125	132	50	11	8	29	11

(mm)

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT


ESD CHEMICALS

PL-05・06 LONG FLAT NOSE PLIERS


Thin and flat edge for efficient work

- Jaws without serration
- Long-life box joint structure to avoid loosening
- Material: Stainless steel

Point section

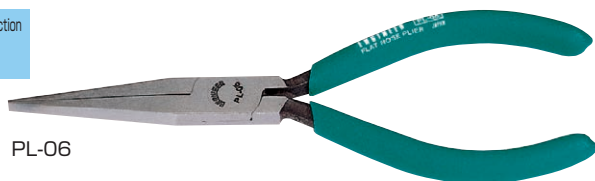

PL-06



Item No.	SIZE	A	B	C	D	E
PL-05	125	143	50	11	7	40
PL-06	150	164	53	15	10	43



(mm)

PM-06 ROUND NOSE PLIERS

Ideal for looping & coiling of steel wires

- Material: SCM440H

Point section

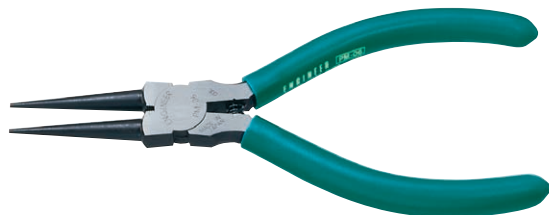

SIZE	A	B	C	D	E
150	145	53	15	8	35


(mm)

PR-15・16 LONG NOSE PLIERS

General purpose pliers

Ⓜ

- Material: S58C
- Hardness: HRC 58±4

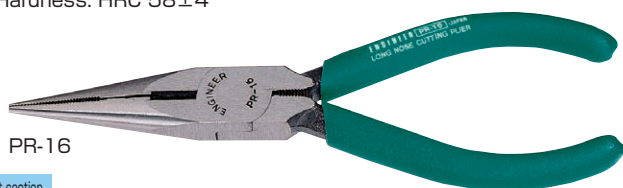

PR-16

Point section



Item No.	SIZE	A	B	C	D	E	Capacity
PR-15	125	142	51	17	10	43	Copper wire φ2.0mm
PR-16	150	160	55	17	10	49	Copper wire φ2.6mm

(mm)

PR-26 LONG NOSE PLIERS

Professional type pliers

Ⓜ

- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire φ2.6mm



Point section



SIZE	A	B	C	D	E
150	160	52	17	10	50


(mm)

PR-36 LONG NOSE PLIERS

Multipurpose pliers with gripping jaws, cutter & wire stripper

Ⓜ

- Stripping Hole: φ1.2mm
- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire φ2.6mm

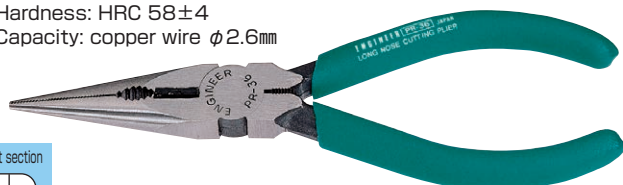

Point section




SIZE	A	B	C	D	E
150	160	51	17	10	50

(mm)


PR-46 NEEDLE NOSE PLIERS

50mm-long slender nose ideal for work in deep area

- Material: S58C
- Hardness: HRC 58±4
- Capacity: copper wire φ2.6mm

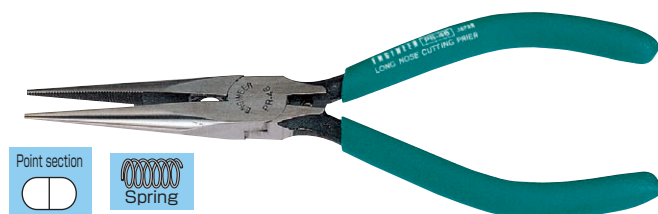

Point section



SIZE	A	B	C	D	E
160	160	51	13	8	50

(mm)

PD SERIES

Features ● Durably constructed Electrician's Pliers

PD-06~08

SIDE CUTTING PLIERS

Heavy duty professional-use pliers


- Material: S58C
- Hardness: HRC 60±4



PD-06



PD-07



Item No.	Size	A	B	C	D	Capacity
PD-06	150	165	50	22	12	steel wire φ1.6
PD-07	175	185	52	24	13	steel wire φ1.8
PD-08	200	210	53	27	14	steel wire φ2.0

(mm)

PC & PW SERIES

Features ● Slip Joint Pliers and Groove Joint Pliers for maintenance and general purpose

PC-05・07

COMBINATION PLIERS


- Slip joint for wide-open jaws
- Material: S58C



PC-05



PC-07



Item No.	Size	A	B	C	D
PC-05	150	167	44	42	9
PC-07	200	203	46	45	11

(mm)


PW-08~10

WATER PUMP PLIERS

- Groove-joint leverage for heavy duty work
- Serrated jaws with soft-touch grip
- Material: S55C



PW-09



Item No.	Size	A	B	C	D	Max. Opening
PW-08	200	190	37	38	8	33
PW-09	250	254	46	49	10	46
PW-10	250	250	38	50	11	45

(mm)

PZ-01・02

E-RING PLIERS

Ideal and smart pliers to remove and fasten E-ring!!

- Place the corner of E-ring into the recess of pliers' jaw for removal, fastening and replacement work.
- Magnetized point for convenient holding
- Long-life box joint structure to avoid loose joint
- Material : Stainless steel




PZ-01




PZ-02



Box joint



(A)



(A)

Item No.	Ring Size	O.A. Length
PZ-01	φ 3~4	150
PZ-02	φ 5~9	164

(mm)



Ring Size

The Ring Size shown above is the diameter of grooved shaft to which E-ring retains.

PZ-16~19

SNAP RING PLIERS

- Slender design of jaws ideal for work at a confined area
- The spiked tips are angled outward (PZ-16&17) or inward (PZ-18&19) to hold a snap ring securely without slippage.
- Spring built into the joint screw for smooth and repeated work
- Material: Carbon steel



PZ-16



Applicable Ring Size

External ring type



PZ-18



Applicable Ring Size

Internal ring type

Item No.	Applicable Ring Size	Tip Diameter	Ring Type	Wgt.
PZ-16	#10-25mm	φ1.3mm	External ring	90g
PZ-17	#19-60mm	φ1.8mm		175g
PZ-18	#10-25mm	φ1.1mm	Internal ring	90g
PZ-19	#19-60mm	φ1.8mm		175g

(mm)

Crimping and Stripping



CONNECTOR CRIMPING PLIERS

Features

- Our line-up offers you very precise and perfect crimp finish of open-barrel contacts.
- ENGINEER original joint-screw prevents the joint from being loose and realizes easy maintenance.
- Pliers made of S55C high carbon steel for durability
- With spring and locking latch for easy handling

PA-24



MICRO CONNECTOR PLIERS


Specialty of 2.5mm pitch connector contacts (AWG #32 to #18), DuPont compatible

- More than 170 different terminals from the major connector manufacturers applicable
- Perfectly crimps a triangular insulation barrel (lugs) of DuPont (Servo) connector without damaging the insulations.
- 6 Crimping Dies ('M'-shaped crimp: 1.3, 1.6, 1.9 & 2.2mm & Round crimp: $\phi 1.4$ & $\phi 1.8$ mm) for open-barrel contacts
- Built-in screw cutter (M2, M2.6 & M3)
- Tapered and slender jaws, Light weight of 115g only
- Spring loaded (on the back side), with locking latch



Screw Cutter M2, M2.6, M3
(Min. Thread Length: 3.5mm)


Typical terminals applicable



M-shaped dies
Lugs curl up very tidily.




Round dies
For triangular lugs
*DuPont connector compatible

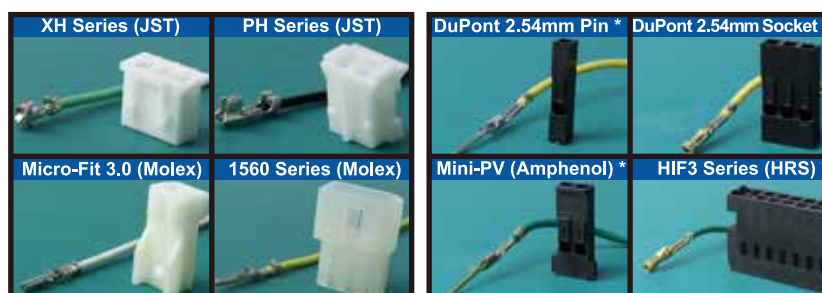

※ Round Crimp dies for Insulation barrel only


Specifications

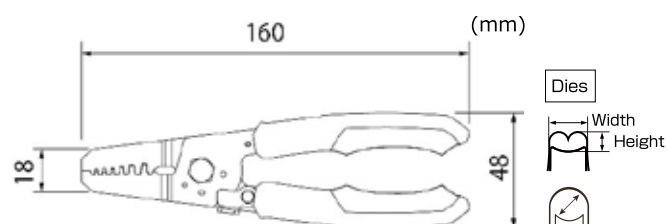

Item No.	Profile of Dies	Die Width (mm)	Die Height (mm)	Die Thickness (mm)	Wire (AWG Ref. only
t PA-24	m	1.3	0.5	2.2	#32~#24
		1.6	0.7		#26~#24
		1.9	0.8		#26~#22
		2.2	0.9		#24~#18
	○	φ1.4		3.2	#30~#28
		φ1.8			#28~#24

How to select the proper dies for crimping an open-barrel contact


1. Measure the width of conductor barrel with a caliper while both barrel wings are in parallel.




Wings opened

Measure the width

2. Select the die width which is close to the width of barrel wings measured.



Die is too narrow.



Good




Die is too wide.

For example: 1.5mm measured Select 1.6mm dies.

CONNECTOR CRIMPING PLIERS

Features

- Our line-up offers you very precise and perfect crimp finish of open-barrel contacts.
- ENGINEER original joint-screw prevents the joint from being loose and realizes easy maintenance.
- Pliers made of S55C high carbon steel for durability
- With locking latch and coiled spring, Light weight for fatigue-free work



PA-09



MICRO CONNECTOR PLIERS

Crimp AWG #32 to #20 wires in micro connectors of different makers!!

- 4 different crimping dies, 1.0, 1.4, 1.6 & 1.9mm(W)
- Makes it possible to crimp 1.25 to 2.5mm pitch connector pin (Narrow pitch)
- D-sub connector contacts also adaptable
- Weight: 145 g



Typical terminals applicable

PH Series(JST)	ZH Series(JST)	Universal Mate-N-Lok 170363-1
EH Series(JST)	NH Series(JST)	Universal Mate-N-Lok 170365-1

Specifications

Item No.	Die Width (mm)	Die Height (mm)	Die Thickness (mm)	Wires applicable (Reference only)		
				φ mm	mm	AWG (conductor)
PA-09	1.0	0.50	1.7	0.20~0.32	0.031~0.08	#32~#28
	1.4	0.55		0.32~0.51	0.08~0.21	#28~#24
	1.6	0.8	2.0	0.51~0.64	0.21~0.33	#24~#22
	1.9	0.9		0.51~0.81	0.21~0.52	#24~#20

PA-20



UNIVERSAL CRIMPING PLIERS

Crimp AWG #28 to #18 wires in micro connectors of different makers!!

- 4 different crimping dies, 1.6, 1.9, 2.0 & 2.3mm(W)
- Makes it possible to crimp 2.5 to 5mm pitch connector pin (Universal type)
- Weight: 145 g



Typical terminals applicable

VH Series(JST)	NH Series(JST)	PH Series(JST)
EL Series(JST)	3191 Series(Molex)	MATE-N-LOK(Tyco)

Specifications

Item No.	Die Width (mm)	Die Height (mm)	Die Thickness (mm)	Wires applicable (Reference only)		
				φ mm	mm	AWG (conductor)
PA-20	1.6	0.7	2.5	0.32~0.64	0.08~0.33	#28~#22
	1.9	0.8		0.51~0.81	0.21~0.52	#24~#20
	2.0	0.9		0.64~1.02	0.33~0.82	#22~#18
	2.3	1.0		0.81~1.02	0.52~0.82	#20~#18

PA-21



UNIVERSAL CRIMPING PLIERS

Precise crimpers for wide range of open-barrel contacts including long barrel wing type

- 4 different crimping dies, 1.6, 1.9, 2.2 & 2.5mm(W)
- Crimping AWG #26~18 contacts of different connector makers
- Weight: 145 g



Typical terminals applicable

XH Series(JST)	NH Series(JST)	VH Series(JST)
PA Series(JST)	Mini Fit(Molex)	Universal MATE-N-LOK(Tyco)

Specifications

Item No.	Die Width (mm)	Die Height (mm)	Die Thickness (mm)	Wires applicable (Reference only)		
				φ mm	mm	AWG (conductor)
PA-21	1.6	0.8	1.8	0.41~0.51	0.13~0.21	#26~#24
	1.9	1.0		0.41~0.64	0.13~0.33	#26~#22
	2.2	1.2		0.51~0.81	0.21~0.52	#24~#20
	2.5	1.4		0.64~1.02	0.33~0.82	#22~#18



PRECISE CRIMPING SERIES - Tool Frame and Die Set

PAD-11~13




HANDY CRIMP TOOL

Ultra-precise crimper forming excellent crimping finish

- Interchangeable die set for open-barrel contacts.
Easy replacement and perfect fitting to the frame
- Ergonomically-designed handles with strap hole
- Equipped with wire stripper and cutter, spring loaded
- Standard accessory : Hex key wrench ● 2.5mm


- Material :
Frame & Die set – Special alloy steel
Handles – Elastomer (TPR)

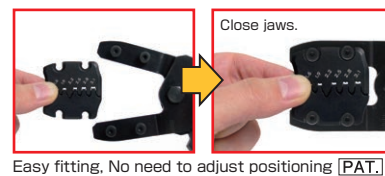


Easy fitting, No need to adjust positioning [PAT.]

PAD-11 (S Size)

Loosen the cap screws with a hex key wrench to replace the die set.

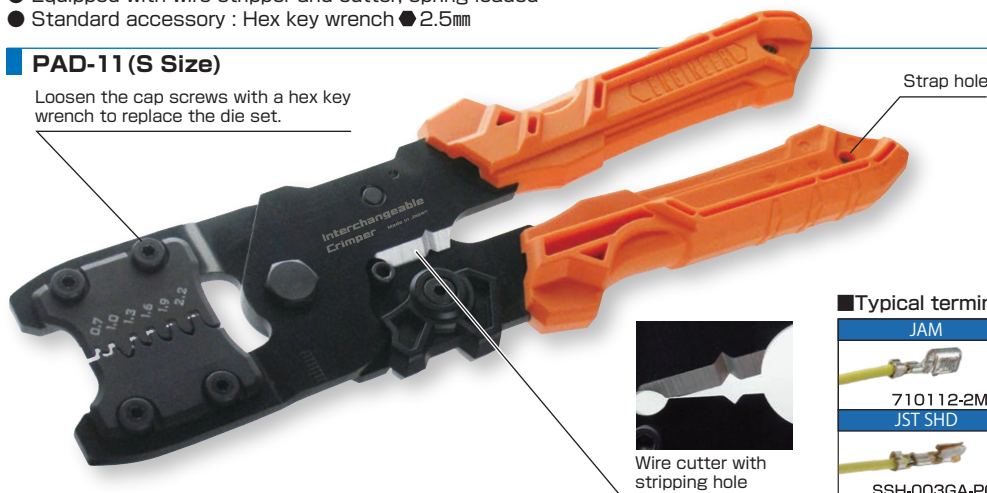

PRODUCT VIDEO



Typical terminals applicable

JAM	Molex CLIK-Mate	Tyco D-1000
710112-2MAC	502381	1827586-2
JST SHD	Molex PicoBlade	Tyco D-1000
SSH-003GA-P0.2	50079	1827587-2

PAD-12 (M Size)



Typical terminals applicable


JST NH	Molex New Mini Fit	Tyco D-3000
SHF-001T-0.8BS	5556T	175217-2
JST VH	Molex New Mini Fit	Tyco D-3000
SVH-21T-P1.1	5558T	175288-2

PAD-13 (L Size)



Typical terminals applicable

JST VL	Molex 3191	Tyco D-3000
BVF-42T-P2.0	1189T	175218-2
JST VL	Molex 3191	Tyco D-3000
BVF-61T-P2.0	1190T	175289-2

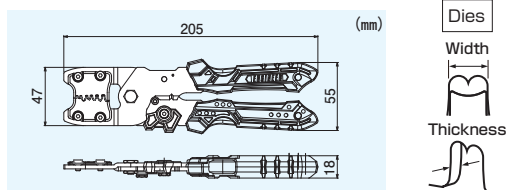

Crimper size

Item No.	PAD-11						PAD-12					PAD-13			
Die width	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7				
Die thickness	1.0		1.5		2.0		2.5		3.0		3.5				

PAD-11S~13S



INTERCHANGEABLE DIE SET

PAD-11S (S Size)

- Over 90 different terminals applicable





PAD-12S (M Size)

- Over 110 different terminals applicable



PAD-13S (L Size)

- Over 100 different terminals applicable



Frame & Dies Combination

Item No.	Frame	Die set
PAD-11	PAD-10	+ PAD-11S
PAD-12	PAD-10	+ PAD-12S
PAD-13	PAD-10	+ PAD-13S

Crimper size

Item No.	PAD-11S						PAD-12S					PAD-13S			
Die width	0.7	1.0	1.3	1.6	1.9	2.2	2.5	2.8	3.1	3.4	3.7				
Die thickness	1.0		1.5		2.0		2.5		3.0		3.5				

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

PAD-02 HANDY CRIMP TOOL COMPLETE SET

- Comes with 3 different interchangeable Die Sets
- Tool Frame & Parts Boxes in a stylish carrying case



■ Set Content

Item No.	Description
PAD-11	Handy Crimp Tool
PAD-12S	Interchangeable Die Set (M Size)
PAD-13S	Interchangeable Die Set (L Size)
	2.5mm Hex. key wrench
	Connectable parts box (6 pcs.) Ext. size: 20×29×16mm
	Carrying case (HDPE)


(mm)

Item No.	Case Size	Wgt.(g)
PAD-02	300×200×63mm	910g approx.

PA-30 WIRE STRIPPER



- One-Squeeze operation for easy stripping of applicable flat cables, 12mm width max.
- With stopper for adjustment of stripping length, 2~20mm.
- Applicable sectional area: AWG20~10

- Sliding stopper to adjust length of stripping.

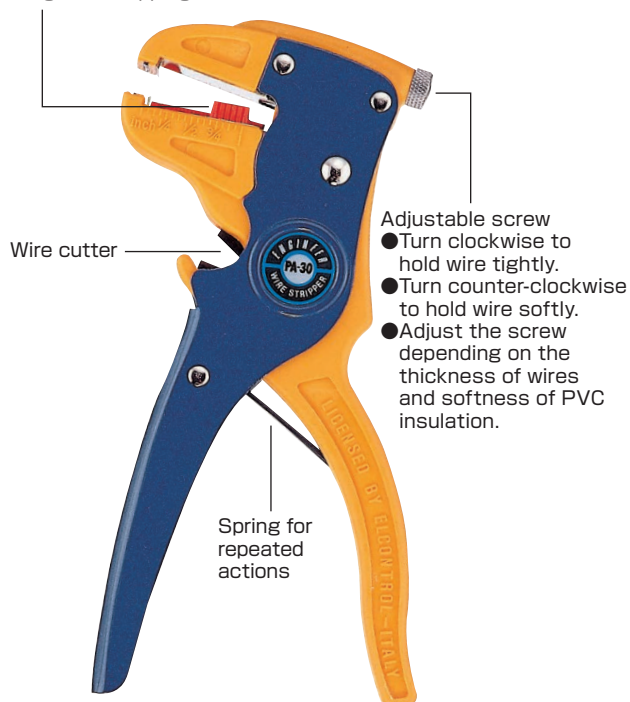

PAW-32 SEMI-AUTO STRIPPER

- Accurate wire stripping with a single squeeze action
- Ideal for stranded wires (AWG) to be stripped with no damage on the core
- With strip gauge: Length of wire is adjustable to max. 30mm
- Robust die-cast alloy and comfort plastic handles with a spring loaded

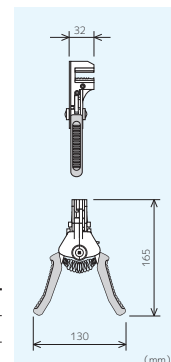


■ Size applicable

Hole diameter(mm)	0.40	0.51	0.66	0.81	1.00	1.29	1.63
Stranded wire(AWG)	26	24	22	20	18	16	14
Sectional area(mm ²)	0.13	0.20	0.33	0.52	0.82	1.31	2.08

PAW-21 COMPACT STRIPPER

- Pocketable and light weight stripper for stripping AWG20~10 low voltage cables as well as coaxial cables (RG6/RG59)
- Materials : ABS & TPR - Body, Carbon Steel - Blades
- Weight : 48g

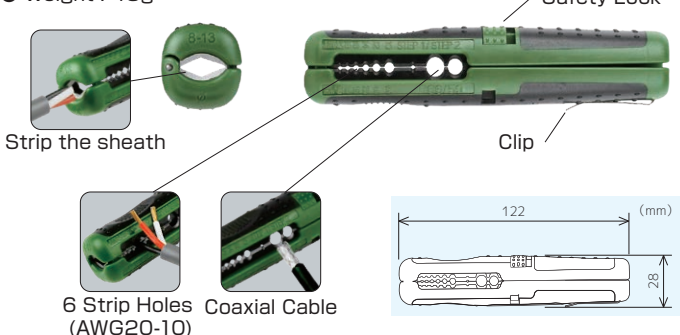

PA-91·92 TERMINAL SET

- Popular crimping terminals and connectors in compact plastic case.



PA-91



PA-92

■ PA-91 Set

Terminal	Sectional area (mm ²)	Screw diam (mm)	Contents
Bare Terminal	R	0.5	3
		1.25	3
		1.25	4
		2	5
		5.5	6
		5.5	5
Y		1.25	4
		2	5
		2	5
		5.5	6

■ PA-92 Set

Terminal	Sectional area (mm ²)	Screw diam (mm)	Contents
Insulated terminal	RV	1.25	3
		1.25	4
		2	5
		1.25	3
		1.25	4
		2	5
YV		1.25	4
		2	5
		2	5
		5.5	6

PAS-30~34




CONNECTOR EXTRACTOR (Spring Loaded Type)

- Perfect and simple work for extracting pin & socket contacts
- Newly designed construction with built-in return spring
- Owing to built-in spring, ejector pin retracts in the sleeve after work. It prevents the ejector pin from being damaged while carrying or not in use.



PRODUCT VIDEO



PAS-30

PAS-31


PAS-32

PAS-33

PAS-34

Reference for extracting typical connectors

Brand/Connector	Pin Housing	Socket Housing
"TE" Mini Universal Mate-N-Lok	PAS-30	SS-30
"TE" Universal Mate-N-Lok	PAS-34	PAS-34
"TE" Commercial Mate-N-Lok	PAS-32	PAS-34
"JST" ML & EL Series	PAS-31	PAS-31
"JST" L & LL Series	PAS-33	PAS-33
"MOLEX" 1545 Series	PAS-33	PAS-34
"MOLEX" 1625 Series	PAS-30	PAS-31
"MOLEX" 3191 Series	PAS-33	PAS-33

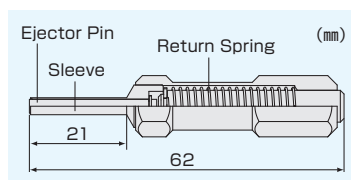

Item No.	Inner Diam of Sleeve	Outer Diam of Sleeve	Material
PAS-30	1.9	2.5	SUS303 Stainless Steel
PAS-31	2.1	2.7	
PAS-32	2.4	2.9	
PAS-33	3.1	3.6	
PAS-34	2.7	3.2	

SS-30~34



PIN EXTRACTOR

Perfect for extracting both pin and socket terminals.

- The ejector rod inside the sleeve enables you to knock out both male & female pin easily from socket terminal.



PRODUCT VIDEO



SS-30

SS-31


SS-32

SS-33

SS-34



(Shape sizes)



Item No.	Outer Diam of Sleeve	Inner Diam of Sleeve	A	B	C
SS-30	2.5	1.9	12	64	21
SS-31	2.7	2.1			
SS-32	2.9	2.4			
SS-33	3.6	3.1			
SS-34	3.2	2.7			

Reference for extracting typical connectors

Brand/Connector	Pin Housing	Socket Housing
"TYCO" Mini Universal Mate-N-Lok	SS-30	SS-30
"TYCO" Universal Mate-N-Lok	SS-34	SS-34
"TYCO" Commercial Mate-N-Lok	SS-32	SS-34
"JST" ML & EL Series	SS-31	SS-31
"JST" L & LL Series	SS-33	SS-33
"MOLEX" 1545 Series	SS-33	SS-34
"MOLEX" 1625 Series	SS-30	SS-31
"MOLEX" 3191 Series	SS-33	SS-33
"MOLEX" 8980 Series(4-pin connector in PC)	SS-32	SS-34

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

PH-01~04


LOCK HOLDER

- Perfect for holding components and clipping oil hoses
- Ratchet handles allow smooth clipping and quick lock release.
- Serrated hemostat for assembling, soldering and precision clamping work
- With 3-position snap lock



Holding component

Clipping oil hose

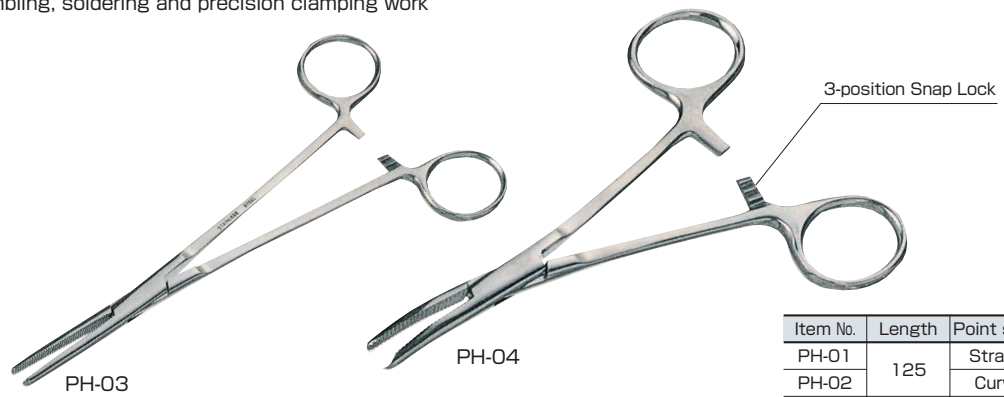


Item No.	Length	(mm)
		Point shape
PH-01	125	Straight
PH-02		Curved
PH-03	150	Straight
PH-04		Curved

SS-21·22

SPRING HOOK

- Ideal for inserting, removing and adjusting coil springs of electronic components or precision instruments
- Suitable for removing connector leads, aligning leads of resistor or condenser and testing arrangements of wires
- 3mm diam.X215 O.A. length

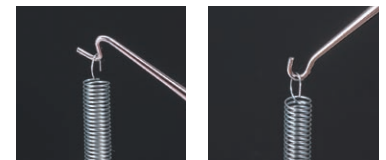

SS-21

SS-22



SS-21




SS-22

TP-33·34

PICK-UP TOOL

- 4 spring jaws pick up small and ball bearing type parts easily and firmly.
- Suitable for assembly work of precision instruments.
- Ideal for pick-up work even in hard to reach areas.

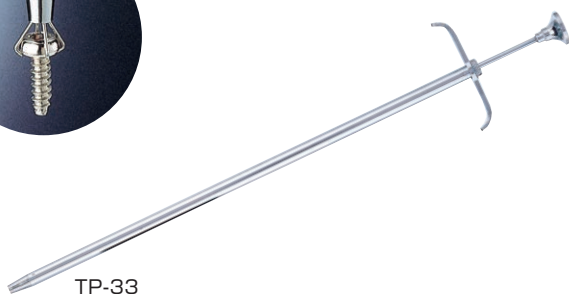


TP-33

Item No.	Housing	(mm)
		O.A. Length
TP-33	φ6.2	250
TP-34	φ6.2	350

TP-35·36

MAGNETIC PICK-UP TOOL

- Ideal for part retrieval in hard to reach areas
- Flexible shaft conforms to any shape
- Alnico magnet tip



Item No.	O.A. Length	(mm)
TP-35	410	
TP-36	525	

PA-06 • 07 • 14

WIRE STRIPPER



- Giving a very round finish of wires after stripping by sharp and precise edge
- Made of carbon steel alloy withstanding abrasions
- Oil-resistant Elastomer (TPR) handle

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES



CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

PA-14 for micro-thin wire

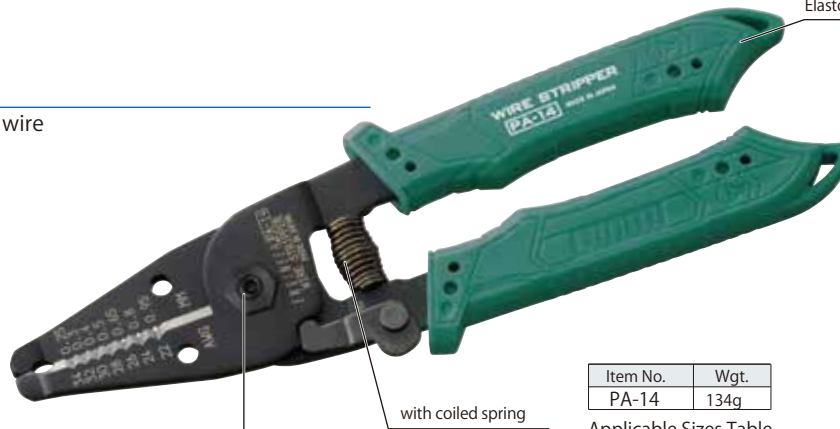


Environment-friendly Elastomer handle

with coiled spring



with strap hole



Item No.	Wgt.
PA-14	134g

Applicable Sizes Table


Stripper's Hole Diam (mm)			0.25	0.3	0.4	0.5	0.65	0.8	0.95
Applicable wire	AWG conversion	Stranded	34	32	28~30	26	24	22~24	20~22
		Solid wire	32	30	28	26	24	22	20

() Reference

PA-06 for thin wire



Environment-friendly Elastomer handle



Item No.	Wgt.
PA-06	134g

Applicable Sizes Table


Stripper's Hole Diam (mm)		0.4	0.5	0.65	0.8	0.95	1.15	1.45
Applicable wire	AWG conversion	Stranded	28~30	26	24	22~24	20~22	20 (18)
		Solid wire	28	26	24	22	20	18 16

() Reference

PA-07 for thick wire



Environment-friendly Elastomer handle



Item No.	Wgt.
PA-07	134g

Applicable Sizes Table

Stripper's Hole Diam (mm)		0.8	0.95	1.15	1.45	1.8	2.1	2.5	
Applicable wire	AWG conversion	Stranded	22~24	20~22	20	(18)	(16)	14	12
		Solid wire	22	20	18	16	14	(12)	(10)

() Reference

Wire Stripper AWG Conversion (Reference only)

AWG		34	32	30	28	26	24	22	20	18	16	14	12
Stranded wire diameter (mm)		0.19	0.23	0.29	0.37	0.47	0.59	0.74	0.94	1.18	1.49	1.88	2.37
Conductor diameter (mm)		0.16	0.2	0.25	0.32	0.40	0.51	0.64	0.81	1.02	1.29	1.63	2.05
Sectional area (mm²)		0.025	0.032	0.05	0.08	0.13	0.2	0.33	0.52	0.82	1.31	2.08	3.31
Stripping hole φ (mm)	PA-05												
	PA-06			0.4	0.5	0.65	0.8	0.95	1.15	1.45			
	PA-07						0.8	0.95	1.15	1.45	1.8	2.1	2.5
	PA-14	0.25	0.3	0.4	0.5	0.65	0.8	0.95					

PA-90

STRIP GAUGE

Min. stripping length 1mm!

- Saving time and giving you perfect stripping length every time
- Stripping length adjustable from 1mm to 24mm



Tweezers



PT SERIES (AISI 304 Stainless Steel)

Features

- Standardized stainless steel (AISI 304), anti-magnetic, anti-acid & anti-corrosive alloy
- Hardened points are finished accurately and tensionized body to provide correct spring action & eliminate strain of fingers.
- Indicates spring action with

★ Soft ★★ Middle ★★★ Hard

PT-02 TWEEZERS (RR)

●Length : 150mm

★★



PT-04 TWEEZERS (I)

●Length : 120mm

★



PT-06 TWEEZERS (J)

●Length : 120mm

★



PT-08 TWEEZERS

●Length : 145mm

★



PT-10 TWEEZERS

●Serrated inside point
●Length : 150mm

★★



PT-01 TWEEZERS (AA)

●Length: 125mm

★



PT-03 TWEEZERS (MM)

●Length : 125mm

★



PT-05 TWEEZERS (GG)

●Length : 120mm

★



PT-07 TWEEZERS (TS)

●Serrated inside point
●Length : 125mm


★★



PT-09 TWEEZERS

●Serrated inside point
●Length : 130mm

★★

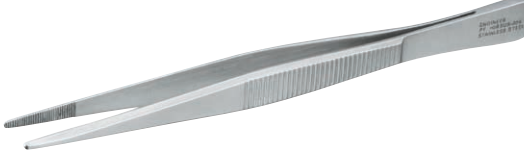

PT-11 TWEEZERS

●Serrated inside point
●Length : 230mm

★★

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES


CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

PT-12**TWEEZERS (BS)**


- Length : 160mm

**PT-13****TWEEZERS**

- Length : 190mm

**PT-14****REVERSE ACTION TWEEZERS**

- Handles are squeezed to open points.
- Serrated inside points
- Length : 175mm

**PT-15****TWEEZERS**

- Inside polished points for picking up small sheets.
- Length : 105mm

**SOLID ARM TWEEZERS SERIES****Features**

- 2.2mm thickly-designed arms hold IC chip more steadily than conventional tweezers.
- Stiff arms can not bend easily and hold a small component very steadily.
- AISI 304 anti-magnetic stainless steel

Arm Thickness:
1.5 times!!

PT-16

Conventional
tweezers


**PT-16·17·31****SOLID ARM TWEEZERS**

- 0.5mm Fine tip
- Length: 125mm



PT-16

- 1.3mm Squared tip
- Length: 125mm

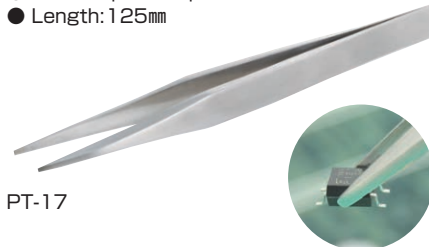

PT-17

- 0.3mm Fine tip (GG)
- Length: 120mm



PT-31

TITANIUM TWEEZERS SERIES (100% ANTI-MAGNETIC)**Features**

- Perfect anti-magnetic titanium, safety in work of electronics and computer device. No solder residue left.
- No corrosion, No rusting and Anti-ionization, ideal for chemical & biological fields
- Light weight, 40% less than ordinary stainless steel tweezers, for fatigue-free work



Soft



Middle



Hard

PTN-01 TYPE AA**TITANIUM TWEEZERS**

- Length : 125mm
- with soft case



General use tweezers with strong sharply pointed type.



with Soft Case **PTK-90**

PTN-02 TYPE GG**TITANIUM TWEEZERS**

- Length : 120mm
- with soft case



Needle-like, very thin tips for handling microscopic parts.



with Soft Case **PTK-90**

PTN-03 TYPE J**TITANIUM TWEEZERS**

- Length : 120mm
- with soft case



very thin and curved tips for working on microminiature assemblies.



with Soft Case **PTK-90**




ENGINEERING PLASTIC, PPS (Polyphenylenesulfide) TIP

Features

- ESD-Safe tip ideal for handling static sensitive components
- Holding the object softly without any possibility of damage like metal tweezers
- Totally anti-magnetic body including stainless steel shank
- Anti-acid chemical resistance
- High wear-resistant and replaceable tip
- Heat resistance up to 270°C (ASTM D648)
- ※ The above is Deflection temperature and is not to guarantee performance of tip against heated object.
- ※ The tips of PTZ-43 and PTZ-93 are thinly finished, so do not apply a strong load. It may cause breakage.

STATIC SAFE
MILD CONTACT

SOFT SPRING ACTION




PTZ-41·42·43

ESD PLASTIC-TIPPED TWEEZERS




PTZ-41



▲ Fine Tip PTZ-41




PTZ-42



▲ Duckbill Tip PTZ-42



PTZ-43



▲ Curved Nose (J) PTZ-43

■ PPS-TIPPED STAINLESS TWEEZERS

Item No.	Overall Length	Tip	Shank Width	Wgt.
PTZ-41	130mm	0.5mm Fine Tip	10mm	16g
PTZ-42	125mm	R0.9mm Duckbill	10mm	16g
PTZ-43	130mm	0.6mm Fine Tip	10mm	16g

PTZ-91

SPARE TIP FOR PTZ-41



Fine tip

■ Contents : tip 2 pcs. & screw 4 pcs./set

Item No.	Material	Surface Resistivity
PTZ-91	PPS	$1 \times 10^5 \sim 10^7 \Omega$

PTZ-92

SPARE TIP FOR PTZ-42



Duckbill tip

■ Contents : tip 2 pcs. & screw 4 pcs./set

Item No.	Material	Surface Resistivity
PTZ-92	PPS	$1 \times 10^5 \sim 10^7 \Omega$

PTZ-93

SPARE TIP FOR PTZ-43




■ Contents : tip 2 pcs. & screw 4 pcs./set


Item No.	Material	Surface Resistivity
PTZ-93	PPS	$1 \times 10^5 \sim 10^7 \Omega$

PTZ-45·46

ESD PLASTIC TIPPED TWEEZERS



▲ Fine Tip PTZ-45



▲ Squared Tip PTZ-46

■ PPS-TIPPED STAINLESS TWEEZERS

Item No.	Overall Length	Tip	Shank Width	Wgt.
PTZ-45	130mm	0.4mm Fine tip	10mm	16g
PTZ-46	125mm	2.3mm Squared	10mm	16g

PTZ-95

SPARE TIP FOR PTZ-45



Fine tip

■ Contents : tip 2 pcs. & screw 4 pcs./set

Item No.	Material	Surface Resistivity
PTZ-95	PPS	$1 \times 10^5 \sim 10^7 \Omega$

PTZ-96

SPARE TIP FOR PTZ-46



Squared tip

■ Contents : tip 2 pcs. & screw 4 pcs./set

Item No.	Material	Surface Resistivity
PTZ-96	PPS	$1 \times 10^5 \sim 10^7 \Omega$

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT


ESD CHEMICALS

PTZ-61~64

BLACK-COATED ESD TWEEZERS

Static dissipative black-coated tweezers

- ESD-safe body ideal for handling static sensitive components ($1 \times 10^5 \sim 10^8 \Omega$)
- Anti-magnetic and non-corrosive stainless steel body
- Non-slip and anti-glare rugged surface for stress-free work


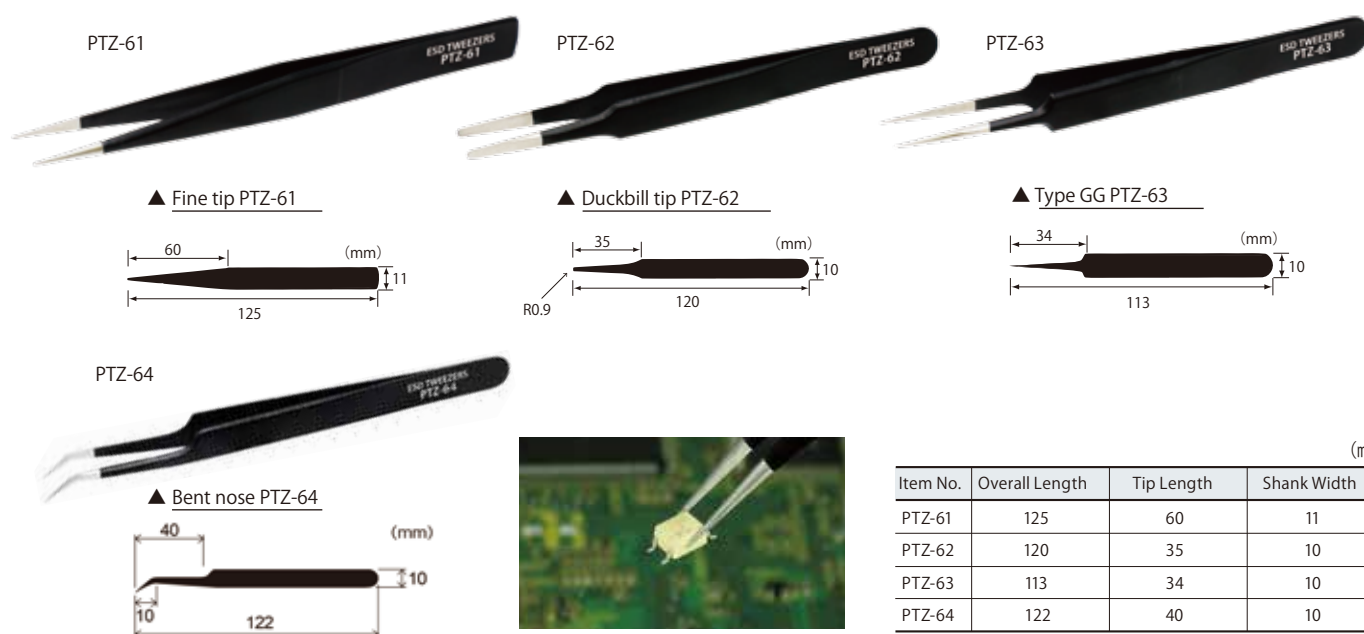


PTZ-51

CERAMIC-TIPPED TWEEZERS

High-temperature resistant ceramic tip featuring less solder adhesive

- Heat resistance : 1,000 °C (Tip)
- High wear-resistant and anti-acid tip
- Excellent electrical insulation
- Material : Anti-Magnetic stainless steel body with zirconia ceramic fine tip



■ Contents : tip 2 pcs. & screw 4 pcs./set

PTZ-94

SPARE TIP FOR PTZ-51

PTS SERIES

Features ● Anti-corrosive stainless steel

PTS-01

TWEEZERS

- Straight AA type
- Length:125mm



PTS-03

TWEEZERS


- Curved with serrated inside
- Length:125mm



PTS-02~04~08

TWEEZERS

- Straight with serrated inside



Item No.	Length (mm)
PTS-02	125
PTS-04	150
PTS-05	180
PTS-06	210
PTS-07	240
PTS-08	300

Screwdrivers



DG-01~04 **PRO GRIP DRIVER**

- Soft grip handle provides excellent tightening power without slipping.
- Chrome-vanadium alloy steel, perfectly heat-treated gives it lasting durability.
- Black magnetic oxide tip.
- Chrome plated.



(mm)

Item No.	Point Size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length
DG-01	⊖ 5.5×0.7	80	5.5	28	200
DG-02	⊕ #1	80	5.5	28	200
DG-03	⊖ 6.3×0.9	76	6.3	32	214
DG-04	⊕ #2	76	6.3	32	214

DG-05  **CUSHION DRIVER**

- ⊕/⊖ Two-in-one reversible blade.
- Comfortable soft-grip handle.
- Can also be used with electric and air drivers.
- Magnetized points



(mm)

Item No.	Point Size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length
DG-05	⊕#2/⊖6	95	6.3	34	210

DP-03~64  PRO-USE DRIVER

- Chrome Vanadium alloy steel & complete heat treated blade.
- Black oxide finish blade.
- Knurl shaft for quick rotation



Size table (mm)

Item No.	Blade size	Shaft length	Shaft diam.	Handle diam.	O.A. Length
DP-03	#00	75	3	15	146
DP-24	#0	100	4.3	18	183
DP-44	#1	100	5.5	25	200
DP-64	#2	100	6.3	27	213
DP-13	⊖3.0×0.35	75	3	15	146
DP-34	⊖4.3×0.5	100	4.3	18	183
DP-54	⊖5.5×0.7	100	5.5	25	200

(Blade size = width \times thickness)

DG-09  **MASTER GRIP DRIVER**

- Master Cushion grip assures powerful fastening power.
- Bottom marking & color distinguish slotted from phillips tip.
- Special alloy steel blade, tempered & plated for lasting durability.
- Precision black-point finish, magnetic point.



(mm)

Item No.	Point Size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length
DG-09	⊖ 6×10	70	6.3	40	195

DG-11~14 **EXTRA LONG GRIP DRIVER**

- Cushion grip handle which fits perfect in the hand provides excellent tightening power.
- Shafts are made of chrome vanadium alloy steel, entirely heat treated with black magnetic oxide tip.
- Chrome plated finish.



(mm)

Item No.	Point Size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length
DG-11	⊖6.0×0.8	225	6.3	32	362
DG-12	⊕#2	225	6.3	32	362
DG-13	⊖6.0×0.8	275	6.3	32	412
DG-14	⊕#2	275	6.3	32	412

DS-03~64  **STANDARD DRIVER**Size table for \oplus driver (mm)

Item No.	⊕Blade size	Shaft length	Shaft diam.	Handle diam.	O.A. Length
DS-03	#00	75	3	11	128
DS-23	#0	75	4.3	16	151
DS-24	#0	100	4.3	16	176
DS-44	#1	100	5.5	18	185
DS-46	#1	150	5.5	18	235
DS-64	#2	100	6.3	22	193

Size table for \ominus driver (mm)

Item No.	⊖Blade size	Shaft length	Shaft diam.	Handle diam.	O.A. Length
DS-12	2.6×0.35	50	3	11	103
DS-13	2.6×0.35	75	3	11	129
DS-14	2.6×0.35	100	3	11	154
DS-33	4.0×0.5	75	4.3	16	150
DS-34	4.0×0.5	100	4.3	16	175
DS-54	5.5×0.7	100	5.5	18	184

DG-21~24 IROHS MINI SOFT DRIVER

- Comfortable soft-grip handle.
- Chrome-vanadium steel & perfectly heat-treated blade.
- Black oxide point.
- Chrome plated finish.




(mm)					
Item No.	Blade size	Shaft length	Shaft diam.	Handle diam.	O.A. Length
DG-21	⊖3×0.4	80	3	21	167
DG-22	⊕#00	80	3	21	167
DG-23	⊖4×0.5	80	4	21	167
DG-24	⊕#0	80	4	21	167

DK-16 IROHS MINI SOFT DRIVER SET

Contents

- DG-21
- DG-22
- DG-23
- DG-24

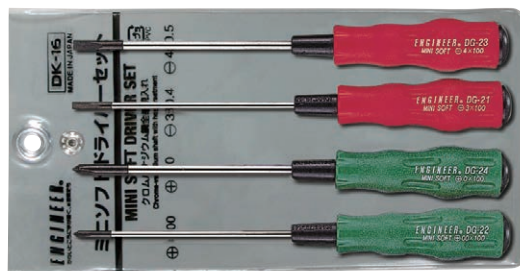

DST-01·02 IROHS STUBBY DRIVER

DST-01




DST-02



(mm)					
Item No.	Tip size	Shaft length	Shaft diam.	Handle diam.	O.A. Length
DST-01	⊖6.3×0.9	38	6.3	30	86
DST-02	⊕ #2	38	6.3	30	86

DST-05 IROHS COMBINATION REVERSIBLE STUBBY DRIVER


- 2-in-1 ⊕/⊖ reversible in single hand.
- Extra compact 85mm O.A. length.




(mm)					
Item No.	Tip size	Blade length	Blade diam.	Handle diam.	O.A. Length
DST-05	⊕#2/⊖6.3	23	6.3	30	85

DST-06·07 IROHS MINIATURE REVERSIBLE DRIVER


- 2-in-1 ⊕/⊖ reversible in single hand.
- Specially compact design in 42mm O.A. length.




DST-06



Fluted design handle assures perfect thumb and finger grip.



DST-07



(mm)				
Item No.	Tip size	Bit length	Bit diam.	Handle diam.
DST-06	⊕#1/⊖4.5	16	6.3	27.5
DST-07	⊕#2/⊖6	16	6.3	27.5

DK-50 IROHS REVERSIBLE DRIVER SET

- ⊕/⊖ Reversible type, 3pcs. set
- Contents: DK-51 ⊕#00/⊖2.6
DK-52 ⊕#1/⊖4.5
DK-53 ⊕#2/⊖6



DK-51~53 IROHS REVERSIBLE DRIVER


- ⊕/⊖ Two-in-one



(mm)					
Item No.	Tip size	Blade length	Blade diam.	Handle diam.	O.A. Length
DK-51	⊕#00/⊖2.6	67	3	18	164
DK-52	⊕#1/⊖4.5	82	5	24	195
DK-53	⊕#2/⊖6	89	6.3	26	216

DR-54 IROHS STUBBY RATCHET PALM DRIVER

- Super compact stubby driver for hard-to-reach areas
- Improved efficiency due to the ratchet mechanism
- Magnet bit socket to attract and hold the bit firmly and securely in place



Item No.	Bit size	Gear positions	Swing arc	Material	Wgt.
DR-54	⊕#2×25mm	45	8 degrees	Handle: Aluminium Bit: Carbon steel	50g

DZ-01·02 IROHS MINIATURE DRIVER



DZ-01



DZ-02

(mm)					
Item No.	Point Size	Shaft Length	Shaft diam.	Grip diam.	O.A. Length
DZ-01	⊖1.6×0.3	30	2	6.3	55
DZ-02	⊕ #000	30	2	6.3	55

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

DR-52**MASTER GRIP DRIVER**

Provides the most useful and popular magnetic bits.

- Tips also fit most rechargeable and electric drivers.
- Chrome-vanadium steel.
- Cushion grip handle.

Bullet-type bit holder for portable use.



Bit set is separately available **DR-16**
Ref. page 41

Cushion grip



Easy slide-in


**DR-03****RATCHET STUBBY DRIVER**

- Compact 95mm O.A. length with a comfortable grip.
- Built-in ratchet mechanism.
- Replacement bits: \oplus #2/ \ominus 6mm, \oplus #1/ \ominus 4.5mm.
- Knurl shaft for quick rotation


**DR-07****TWIN WRENCH DRIVER SET**

Designed for sure-gripped work in restricted areas.

- 10-in-1 combination of the most useful \oplus/\ominus tips.
- Knurled cushion handle fits the hand and the job.
- With portable bullet holder.
- Replacement bit sizes \oplus #00, #1, #2 \ominus 4.5, 6
● 1.5, 2, 2.5, 3, 4

**DR-04****RATCHET STUBBY DRIVER SET**

- Versatile driver with common replaceable \oplus/\ominus point bits.
- Built-in ratchet mechanism.
- Replacement set includes : \oplus #00, #1, #2, \ominus 4.5, 6,
● 2.5, 3, 4, 5, 6 (Ball pointed)
- Knurl shaft for quick rotation

**DZ-70 · 71****GO-THROUGH DRIVER**

- Ergonomically designed comfort handle, accepts 6.35mm driver bit (Bit length over 50mm recommended)
- The handle is narrow in the middle to place fingers here for safety, and useful for quick tightening.

Hex Bolster
(Across Flats 13mm)



TPR

PP



Metallic Core



The impact by a hammer transmitted well to the tip


DZ-70
(Handle only)



DZ-71



Press & Twist
Extractor Bit
for #2 screw
(DBZ-51)

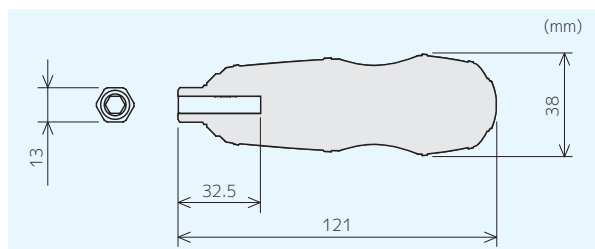


(mm)

Item No.	Bit	Shaft Length	Handle Diam.	O.A. Length
DZ-70	---	---	38	121
DZ-71	DBZ-51	73		194

DR-05 OFFSET RATCHET DRIVER


- Built-in quick ratchet mechanism increases work productivity.
- Designed to permit work in close areas that are inaccessible with ordinary drivers.
- Tip : \oplus #2/ \ominus 6mm

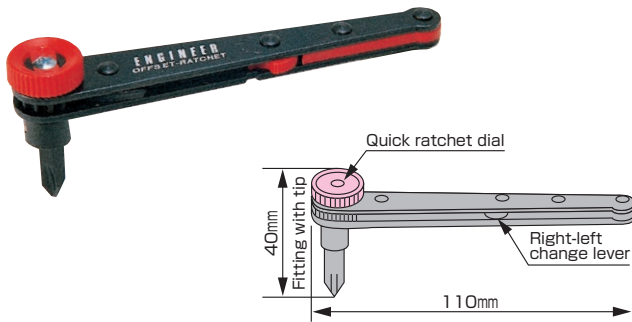

DR-06 OFFSET RATCHET DRIVER WITH BIT SET

Excellent for working in close areas!

- Versatile driver with most popular \oplus / \ominus & hex bits.
- Complete with handy bullet holder for carrying.
- Replacement set includes: \oplus #00, #1, #2, \ominus 4.5, 6
● 1.5, 2, 2.5, 3, 4
- Built-in quick ratchet dial.

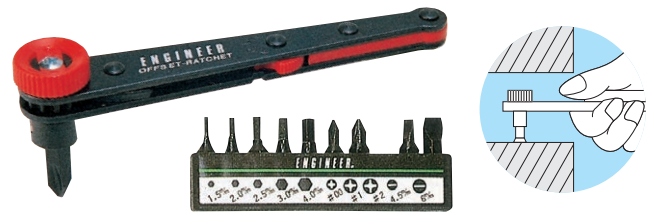


DR-55


MINI OFFSET RATCHET

Only 22mm-high low-profile head accessible to tight space!!

- Built-in quick ratchet dial increases work productivity.
- Bit set includes : \oplus #1, #2 (2 pcs.), #3 & \ominus 6mm

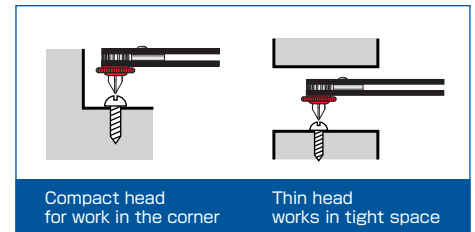

Super-thin Head 22mm

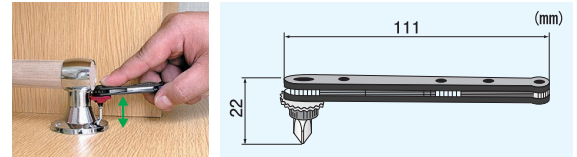


DR-10·11·15~17

BIT SET

- A comprehensive and wide selection of bits to handle any job or application.
- Bullet type bit holder suitable for portable use
- DR-16 bits are also used for rechargeable or electric drivers.


DR-10



DR-11



DR-17



DR-15



DR-16



Item No.	Number of bits	Bit Sizes	Length	Wgt.(g)
DR-10	10	\oplus #00, #1, #2, \ominus 4.5, 6, \bullet 2.5, 3, 4, 5, 6 (Ball pointed)		97
DR-11	10	\oplus #00, #1, #2, \ominus 4.5, 6, \bullet 1.5, 2, 2.5, 3, 4 (Hex bit)	30	67
DR-15	6	\star/\star T5/T6, \star/\star T7/T8, \star/\star T9/T10, T15/T20, T25/T27, T30/T40	110	159
DR-16	6	\oplus Double end bit...#2 \times 65 #2 \times 110 \oplus Step type...#0 \times 85 #1 \times 100 #2 \times 150 \oplus bit...#2/ \ominus 6 \times 135		147
DR-17	10	\star ...T8, T10, T15, T20, T25, T27, T30, T40 \oplus Double end bit...#1/ \ominus 4.5, #2/ \ominus 6 (\oplus bits are magnetic)	30	68

Special Drivers



DT/DTC/DTP/DTY SERIES



MOBILE PHONE DRIVER

Made for special screws, ideal for maintenance work of cordless phones, cellular phones, etc.



Torx (Hex-lobe) screws

There may be a projection in the center of screw hole for prevention of theft and tampering. Torx (Hex-lobe) screws are used for cordless phone, transceiver, precision instruments, etc.

DTC-27



Point size

(mm)

Item No.	Point size	Shaft Length	Shaft diam	Handle diam	O.A. Length	Main Use	
DTC-20	3.6	90	4.5	7.0	25	190	Game console/Soft
DTC-27	4.6	90	5.9	7.0	25	190	Game console

DAP-01




DTP-05



Point size

(mm)

Item No.	Point size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length	Main Use
DAP-01	0.9	23	3.0	10	113	Smart phone
DTP-03	1.3	75	3.0	15	146	Mobile phone, etc
DTP-05	1.7	100	5.5	25	200	Mobile phone, etc

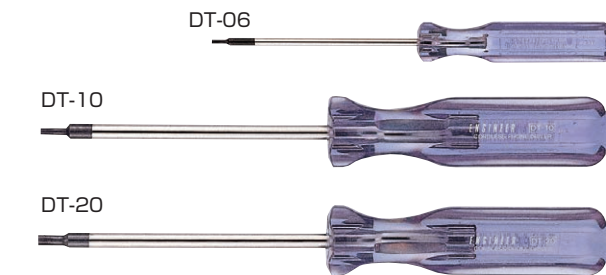

Applicable to tampering-proof screws (T6~T20)

(mm)

Item No.	Point size	Shaft length	Shaft diam.	Handle diam.	O.A. Length	Main Use
DT-02	★ 0.9 T2	75	3.0	15	146	Game console
DTX-04	★ 1.2 TX4	75	3.0	15	146	Smart phone/Mobile phone
DT-04	★ 1.3 T4	75	3.0	15	146	Smart phone/Mobile phone
DT-05	★ 1.4 T5	75	3.0	15	146	
DT-06	★ 1.7 T6	75	3.0	15	146	
DTX-08	★ 2.0 TX8	75	3.0	15	146	Smart phone/Mobile phone
DT-08	★ 2.3 T8	75	3.0	15	146	
DT-10	★ 2.7 T10	100	5.5	25	200	
DT-15	★ 3.3 T15	100	5.5	25	200	
DT-20	★ 3.8 T20	100	5.5	25	200	

DAT-02



Point size

(mm)

Item No.	Point size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length	Main Use
DAT-02	★ 0.9 T2	23	3.0	10	113	Game console

DTY-03



Point size

(mm)

Item No.	Point size	Shaft Length	Shaft diam.	Handle diam.	O.A. Length	Main Use
DTY-02	1.7	75	3.0	15	146	Game/Mobile phone
DTY-03	2.4	75	3.0	15	146	Game/Mobile phone

DR-18

BIT SET FOR MOBILE PHONE

10-in-1 special driver bit set

- Easy to distinguish different color band.
- Magnet point attracting a tiny screw.



DR-50



TWIN WRENCH DRIVER (For Special Screws)

Ideal for sure-gripped work in restricted areas.



- Off-set twin wrench driver with 8 Torx bits and 2 ⊕/⊖ bits.
- Non-slip knurled cushion handle.
- Bullet type replaceable bit holder.

CONTENTS

(mm)

Shape of Bit	Point	Size
Torx bit	★	8 10 15 20 25 27 30 40
⊕/⊖ bit	⊕/⊖	⊕#1/⊖4.5 ⊕#2/⊖6.0

Bit set is separately available [DR-17]

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERS

SPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSING

SETS
CASES

SOLDERING
EQUIPMENT

ESD
CHEMICALS


DR-51**MASTER GRIP DRIVER (For Hex-Lobe Screws)**

Accommodates 12 different sized Torx (hex-lobe) screws.

- 6 double ended hex-lobe bits fit 12 different screw sizes from T-5 to T-40.
- Bits are made of chrome-vanadium steel.
- Cushion grip handle.

Cushion grip

Easy slide-in



■ Contents of bit set (12 sizes)

Tip Shape	Tip Size	O.A.Length
★/★	T-5/T-6	110mm
★/★	T-7/T-8	
★/★	T-9/T-10	
★/★	T-15/T-20	
★/★	T-25/T-27	
★/★	T-30/T-40	



Standard accessory

- Hex lobe bit set
- Bullet-type bit holder
- Master grip

Bit set is separately available **DR-15**

■ Applications for hex-lobe screws

Size	T5	T6	T7	T8	T9	T10	T15	T20	T25	T27	T30	T40
Outer diam. (mm)	1.4	1.7	2.0	2.3	2.5	2.7	3.3	3.8	4.4	5.0	5.5	6.6
Screw adapted	—	M2	—	M2.5	—	M3	M3.5	M4	M5	M5	M6	M8

※Diameter is just for reference

DJ-03·04**PLUG JACK DRIVER**

- Ideal for use with radio microphone jacks.



DJ-03
C type

DJ-04
C type



C type

Item No.	Tip shape & size			Shaft length	Shaft diam.	Handle diam.	O.A. Length
	A	B	C				
DJ-03	—	—	4	75	4.3	16	150
DJ-04	—	—	6	75	4.3	16	150

(mm)


DN-01~12**NUT DRIVER**

- Anti-abrasive point of special steel.
- Nickel-plated finish.

DN-01



DN-05

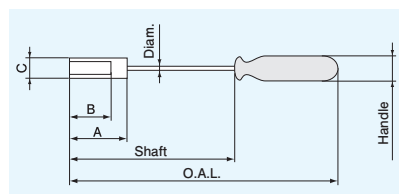

(mm)


Item No.	Size	A	B	C	Shaft Length	Shaft diam.	Handle diam.	O.A. Length	Screw adapted
DN-01	3	18	9	6	75	3.0	11	130	(1.4)
DN-02	4	18	9	6	75	3.0	11	130	2
DN-03	4.5	18	9	8	75	4.0	13	145	(2.3)
DN-04	5	35	25	7.5	75	4.3	16	150	(2.6)
DN-05	5.5	35	25	9	125	5.5	18	210	3
DN-06	6	35	25	9	125	5.5	18	210	(3)
DN-07	7	35	25	11	125	5.5	18	210	4
DN-08	8	35	25	12	125	5.5	18	210	5
DN-09	9	35	25	13	125	5.5	18	210	(5)
DN-10	10	35	25	14	125	6.3	22	220	6
DN-12	12	36	25	17	125	6.3	22	220	(6)

() = old specifications

DNC-55T·57T·65T**NUT CATCHING DRIVER**

Magnet hold type for easy operation

- Solid shaft machined from one piece of metal, for lasting durability (DNC-55T & 57T)
- Suitable for maintenance service of facsimile machine and photocopying machine.
- Sliding magnet in socket attracts and catches a hex bolt and a flange nut while fitting different heights of the heads.
- Material: Cr-V (shaft), Cellulose Acetate (handle)



DNC-65T



DNC-55T



DNC-57T




(mm)


Item No.	Size	A	B	C	D	E	F	G	Wgt.
DNC-55T	5.5	233	127	29	32	0.5~3.0	9	7	120g
DNC-57T	7	233	127	29	37	0.5~4.3	11	7	125g
DNC-65T	5.5	336	230	29	32	0.5~3.0	9	7	153g

DK-13**REVERSIBLE PRECISION DRIVER SET**


- Driver's shaft length to be adjustable 18~90mm.
- Magnetic point ⊖ for hard-to-reach screws.
- 4mm slim shaft with double-ended blade (5-in-1)
- Cushioned grip for well-fitting with fingers.
- With rotary cap for quick rotation or precise alignment work

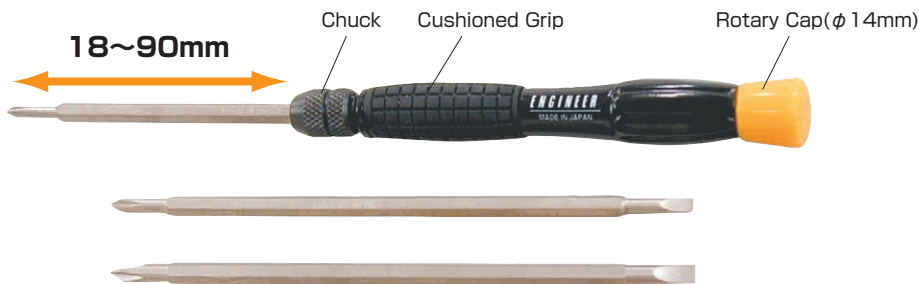


Contents 3 pcs. (Double-ended)	
Length: 125mm	
# 00	⊖ 2.5mm
# 0	⊖ 3.0mm
# 0	⊖ 4.0mm

**DKD-01****CIRCUIT TESTING DRIVER**

- AC80~250V, DC100~300V
- For continuity & transmitting test
- Blade: 4.0 x 0.5mm
- O.A. Length: 129mm

**DKD-03****LED CIRCUIT TESTER**

- AC100-250V (Low voltage use)
- High brightness LED built-in
- Continuity check of circuit
- Polarity check of electric outlet
- Blade (3.0 x 0.4mm) with protective cap
- O.A. Length : 120mm




Continuity check

**DB-15~40****BALL POINT DRIVER**

- Ball head works from an angle up to 30° off axis.
- Heat-treated alloy steel with electroless nickel plating
- Magnetized point



Ball Ended Point.

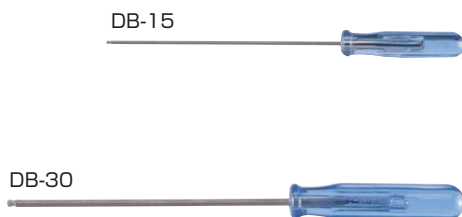

Item No.	Size	Shaft length	Shaft diam.	Handle diam.	O.A. Length
DB-15	1.5	70	1.5	11	124
DB-20	2	70	2	11	124
DB-25	2.5	70	2.5	16	143
DB-30	3	100	3	16	173
DB-40	4	120	4	18	204

(mm)

DK-03**BALL DRIVER SET**

- Set of 5 most popular ball drivers in a vinyl pouch.



DK-03(5pcs)

- DB-15
- DB-20
- DB-25
- DB-30
- DB-40

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS


SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

DK-14


- Set of 6 nut drivers with across flats 3~6mm
- Magnetized sockets

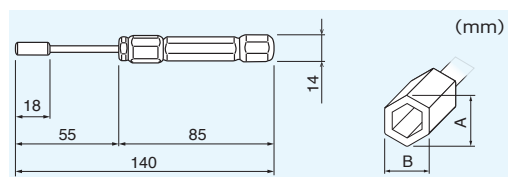

Materials
Socket:Cr-Mo
Shaft:Cr-V
Handle:Cellulose Acetate
Cap:PP

NUT DRIVER SET

Slim socket design



With rotary cap



Self-standing holder

Item No.	Across Flats	Screw Diameter	Ext. Socket Size		Wgt.
			A	B	
DK-14	3	M1.4/M1.5	6.3	5.6	155g (Holder included)
	4	M2	6.3	5.6	
	4.5	M2.3	8	7	
	5	M2.5/M2.6	8	7	
	5.5	M3	9.1	8	
	6	M3.5	9.1	8	

DH-15~50

- Heat-treated, chrome-molybdenum alloy steel blade.

DH-15



DH-30



Item No.	Size	Shaft length	Handle diam.	O.A. Length
DH-15	1.5	90	11	144
DH-20	2	90	11	144
DH-25	2.5	90	11	144
DH-30	3	90	16	163
DH-40	4	90	16	163
DH-50	5	90	18	175

**DK-01・02**

- Set of 4 (DK-01) and 6 (DK-02) most popular hex drivers in a vinyl pouch.



**DK-01
(4pcs)**

- DH-15
- DH-20
- DH-25
- DH-30



**DK-02
(6pcs)**

- DH-15
- DH-20
- DH-25
- DH-30
- DH-40
- DH-50

HEX DRIVER SET

Screw adapted (mm)

Size	Cap screw	Set screw
1.5	M1.6,M2	M3
2.0	M2.5,M2.6	M4
2.5	M3	M5
3.0	M4	M6
4.0	M5	M8
5.0	M6	M10

DM-20  **PRECISION DRIVER SET**


Item No.	Tip Size	Blade Diam.	O.A. Length (mm)
DM-21	#0000	1.4	76
DM-22	#000	1.6	84
DM-23	#00	2	90
DM-24	#0	2.4	102
DM-25	#1	3	110
DM-26	#1	3.5	118

DM-30  **PRECISION DRIVER SET**



Item No.	Tip Size	Blade Diam.	O.A. Length (mm)
DM-31	1.0×0.2	1	73
DM-32	1.2×0.3	1.2	79
DM-33	1.8×0.3	1.8	89
DM-34	2.4×0.45	2.4	102
DM-35	3.0×0.6	3	110
DM-36	3.5×0.7	3.5	118

DM-60  **PRECISION DRIVER SET**


Item No.	Tip Size	Blade Diam.	O.A. Length (mm)
DM-22	#000	1.6	84
DM-24	#0	2.4	102
DM-25	#1	3	110
DM-33	1.8×0.3	1.8	89
DM-34	2.4×0.45	2.4	102
DM-35	3.0×0.6	3	110

DK-05  **INTERCHANGEABLE DRIVER SET**

With circuit testing driver handle for low voltage.
(AC80~250V/DC100~300V)
Contents: ⊖5.5mm, ⊕#00, #0, #1, #2, #3

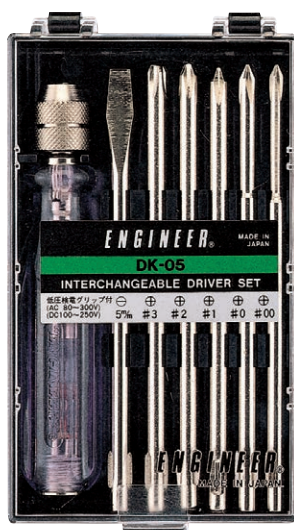
DK-06  **INTERCHANGEABLE DRIVER SET**

With circuit testing driver handle for low voltage.
(AC80~250V/DC100~300V)
Contents: ⊕#1, #2, ⊖3, 5.5mm, ⊖5.5mm, awl


DK-08  **INTERCHANGEABLE DRIVER SET**

Contents: ⊖4, 5.5, 6, 7, 8, 10mm


DK-05P-06P  **INTERCHANGEABLE DRIVER SET**

- Cost-saving package in Plastic blow-mould case
- Contents exactly same as DK-05 & DK-06



SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES


SOLDERING EQUIPMENT

ESD CHEMICALS

DA-48~52**CERAMIC ALIGNMENT SCREWDRIVER**

Four-in-One Slotted Tip & Hex Core Ceramic Alignment Screwdrivers.

- Perfect non-conductive tip for high frequency trimming.
- Ideal alignment screwdriver for short-circuit prevention
- Four-in-one double ended tool.
- Pen-type design with protective caps and pocket clip.
- $\phi 8 \times 136\text{mm}$ long

IFT trimmer
(Slotted)

coil trimmer

trimmer
(Slotted)trimmer
(Phillips)

Tips are made of fine, durable zirconia ceramic.



DA-48



DA-50



DA-51



DA-52

Item No.	Size	(mm)
		●Core
DA-48	$\ominus 0.7 \times 1.3$	2
	$\ominus 0.4 \times 2.4$	2.5
DA-50	$\ominus 0.35 \times 0.8$	2
	$\oplus \#0$	—
DA-51	$\ominus 0.4 \times 0.9$	2
	$\ominus 0.4 \times 1.8$	2.5
DA-52	$\ominus 0.4 \times 1.3$	2
	$\ominus 0.7 \times 2.5$	2.5

DK-90**CERAMIC ALIGNMENT SCREWDRIVER SET**

◇ Assortment of DA-48~52 (4pcs.)

**DA-72~79****CERAMIC ALIGNMENT SCREWDRIVER**

The DA-70 series ceramic alignment screwdrivers are designed with a long slender shaft for a wider application of alignment in remote areas.

- Fine zirconia ceramic tipped alignment screwdrivers, highly intensive, durable, and perfectly non-conductive
- Slide-in shaft is attachable to other tools & equipment
- Long, slim design for easy access to remote areas
- Two-in-one, slotted tip and hex. core (except DA-78)



DA-72



DA-77



DA-73



DA-78



DA-74




DA-79



DA-75



DA-76



Item No.	Size	●Core	(mm)		
			A Size	B Size	Bottom color
DA-72	$\ominus 0.4 \times 2.4$	2.5	$\phi 4$	94	Orange
DA-73	$\ominus 0.4 \times 0.9$	2.0	$\phi 3.5$	95	Green
DA-74	$\ominus 0.4 \times 1.3$	2.0	$\phi 3.5$	95	Blue
DA-75	$\ominus 0.4 \times 1.8$	2.5	$\phi 4$	94	Red
DA-76	$\ominus 0.7 \times 2.5$	2.5	$\phi 4$	94	Yellow
DA-77	$\ominus 0.35 \times 1.95$	2.5	$\phi 4$	94	Black
DA-78	$\oplus \#0$	—	$\phi 3.5$	92	Gray
DA-79	$\ominus 0.35 \times 0.8$	2.0	$\phi 3.5$	95	Purple


DA-81~88**CERAMIC ALIGNMENT SCREWDRIVER**

Compact designed ceramic alignment drivers. Perfect for assembly line trimming.

- Fine zirconia ceramic tipped alignment screwdrivers, highly intensive, durable, and perfectly non-conductive.
- Two-in-one function with slotted tip and hex core. (except DA-88)
- Ergonomically designed with convenient rotary cap.



IFT trimmer (Slotted)



coil trimmer



trimmer (Slotted)



trimmer (Phillips)



DA-81



DA-85



DA-82



DA-86



DA-83





DA-87



DA-84



DA-88




Item No.	Size	●Core	ASize	BOTTOM COLOR
DA-81	⌀0.7×1.3	2	18	Purple
DA-82	⌀0.4×2.4	2.5		Orange
DA-83	⌀0.4×0.9	2		Green
DA-84	⌀0.4×1.3	2		Blue
DA-85	⌀0.4×1.8	2.5		Red
DA-86	⌀0.7×2.5	2.5		Yellow
DA-87	⌀0.35×1.95	2.5	15	Black
DA-88	⌀#0	—		Gray

DK-91**CERAMIC ALIGNMENT SCREWDRIVER SET**

- ◇ Assortment of DA-81~88 (8pcs.)

**DA-01·02****ALIGNMENT SCREWDRIVER**

- Alignment tool for TV, tuner, trimmer under a high frequency current.

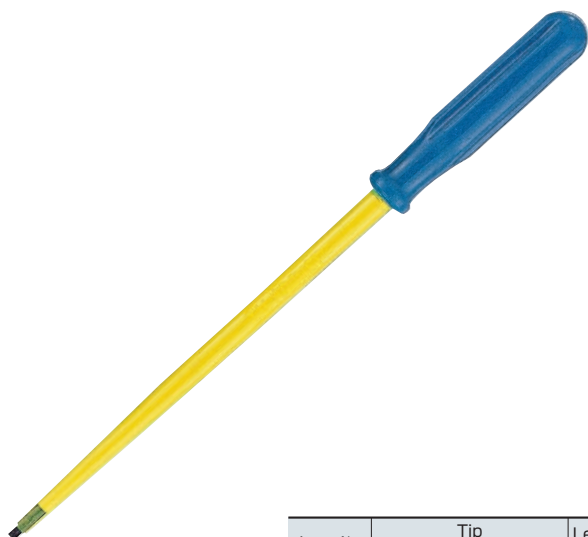

Item No.	Tip			Length of Rod	Handle
	Material	Thick	Width		
DA-01	SK steel	0.5	2.0	100	ϕ12×54
DA-02				150	

DA-40**ALIGNMENT SCREWDRIVER**

- ESD-safe body made of ABS
- Overall length: 125mm
- Tip: ⌀2×0.5 & ⌀2×0.5mm



SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

Wrenches



SMART MONKEY WRENCH

Features


- Only 2mm-thick jaws fit in a narrow area.
- Ideal for fastening coaxial (BNC) connectors, double nut, etc.
- No damage given to housing of BNC connectors
- Accurately machined finish of thin edge
- Made of Chrome Vanadium steel
- Extra long jaws and wide opening type (TWM-07 & TWM-08)

TWM-03·07·08


SMART MONKEY WRENCH



150mm size with soft handle



150mm size



100mm size Stubby with cushioned handle (TPR)






TWM-03



TWM-07



TWM-08

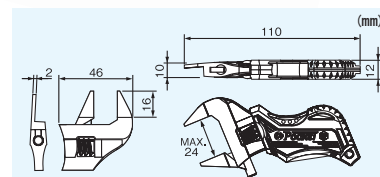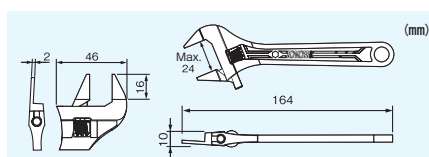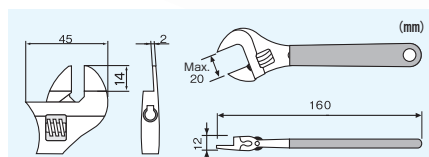

VARIOUS APPLICATIONS



TWM-01·02·04·05

ADJUSTABLE ANGLE WRENCH

- Heavy duty adjustable wrench
- Soft grip for easy handling.



TWM-04




TWM-02



TWM-01



TWM-05



Item No.	Nominal Size	A	B	C	D
TWM-04	100	100	32	13	8
TWM-01	150	155	45	20	10
TWM-02	200	210	57	25	14
TWM-05	250	260	68	30	15

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

TS-04**MINI COMBINATION SPANNER SET**

- 8-in-1 Combination spanner set with key chain
- Box-end inclined (30°)
- Thickness: 1.5mm
- Material: Stainless steel




◆ This item is individually available. (mm)

Item No.	Sizes		Thick	Length
	Box	Open		
TS-41	4.0	3.5	1.5	100
TS-42	4.5	4.0		106
TS-43	5.0	4.5		
TS-44	5.5	5.0		
TS-45	6.0	5.5	1.5	114
TS-46	6.5	6.0		
TS-47	7.0	6.5		
TS-48	8.0	7.0		


DROP-FORGED WRENCH SET

- Features
- 5-in-1 Set with carrying case
 - Material: Cr-V Steel

TS-05**OPEN-END WRENCH SET**


(mm)

Size	A	B	C	D	Wgt.(g)
3,2×5,5	70	13	10	2,4	7
4×5	70	13	10	2,4	7
6×7	80	16	14	2,7	12
8×9	90	20	18	3	17
10×11	100	23	21	3	23

TS-06**COMBINATION WRENCH SET**

(mm)

Size	A	B	C	D	E	Wgt.(g)
3,2	77	10	6,5	3	3,1	7
3,5	77	10	6,5	3	3,1	7
4	77	10	7,5	3	3,1	7
5	82	11,8	9	3,2	4,1	9
5,5	82	11,8	9,5	3,2	4,1	9

TS-07**COMBINATION WRENCH SET**

(mm)

Size	A	B	C	D	E	Wgt.(g)
6	88	15	10,4	3,8	5	14
7	88	15	11,5	3,8	5	14
8	94	17,2	12,5	4,3	6	20
9	98	19,4	14	4,6	6,2	23
10	103	21,5	15,3	5,1	6,6	29


TWB-01·02·04·05**BALL POINT HEX WRENCH SET**

Ball head (magnetized) works from an angle up to 30° off axis.

- Heat treated special alloy with electroless nickel plating
- Hardness : HRC57±2

**TWB-01** 8-in-1 Standard Long Shank**TWB-02** 8-in-1 Stubby Arm, Long Shank


- Stubby arm accessible to restricted area where overhead space is tight




	TWB-01 (8 pcs./set)	TWB-02 (8 pcs./set)	TWB-04 (8 pcs./set)	TWB-05 (8 pcs./set)
Across Flat ● I (mm)	A x B (mm) (Individual model)	A x B (mm)	A x B (mm)	A x B (mm)
● 1.5	81×14 (TWB-15)	81×4	51×14	51×4
● 2.0	96×16 (TWB-20)	96×5	58×16	58×5
● 2.5	111×18 (TWB-25)	111×6	65×18	65×6
● 3.0	127×20 (TWB-30)	127×8	74×20	74×8
● 4.0	142×25 (TWB-40)	142×9	78×25	78×9
● 5.0	160×28 (TWB-50)	160×11	89×28	89×11
● 6.0	180×32 (TWB-60)	180×13	101×32	101×13
● 8.0	198×36 (TWB-80)	198×16	112×36	112×16

TWB-04 8-in-1 Standard Arm, Short Shank


- Hand-held compact sized body in bullet holder

**TWB-05** 8-in-1 Stubby, Short Shank


- Stubby arm accessible to restricted area where overhead space is tight
- Hand-held compact sized body in bullet holder

**TWB-13~80****BALL POINT HEX WRENCH**


- Electroless nickel plated



Item No.	Across Flats ● mm	A x B mm
TWB-13	1.27	70×13
TWB-15	1.5	81×14
TWB-20	2.0	96×16
TWB-25	2.5	111×18
TWB-30	3.0	127×20
TWB-40	4.0	142×25
TWB-50	5.0	160×28
TWB-60	6.0	180×32
TWB-80	8.0	198×36

TWH-01·02·04**HEX KEY WRENCH SET****METRIC SIZE**

TWH-01

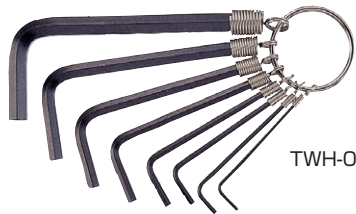


TWH-04

Item No.	pcs.	Set(mm)
TWH-01	7	0.89, 1.27, 1.5, 2.0, 2.5, 3.0, 4.0
TWH-04	8	1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0

INCH SIZE

TWH-02

Item No.	pcs.	Set(inch)
TWH-02	7	0.028", 0.035", 0.05", 1/16", 5/64", 3/32", 7/64"

TWH-11~25**HEX KEY WRENCH****Hex Key Wrench in metric size**

Item No.	Across Flats ● mm	L Size
TWH-11	1.5	45×14
TWH-12	2.0	50×16
TWH-13	2.5	56×18
TWH-14	3.0	63×20
TWH-15	4.0	70×25
TWH-16	5.0	80×28
TWH-17	6.0	90×32
TWH-18	8.0	100×36

Applicable Sizes Chart

Hex Across Flats	Cap Screw Diam.	Set Screw Diam.
1.27	M1.4	M2.5
1.5	M1.6, M2	M3
2.0	M2.5, M2.6	M4
2.5	M3	M5
3.0	M4	M6
4.0	M5	M8
5.0	M6	M10
6.0	M8	M12, M14
8.0	M10	M16, M18

Hex Key Wrench in inch size (mm)

Item No.	Across Flats	L Size
TWH-20	0.028"(0.71)	35×10
TWH-21	0.035"(0.89)	38×10
TWH-22	0.05"(1.27)	40×11.5
TWH-23	1/16"(1.59)	42.5×12.5
TWH-24	5/64"(1.98)	45.5×13.5
TWH-25	3/32"(2.38)	48.5×14.5
TWH-26	7/64"(2.79)	52×16

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

TWS-01~05

SOCKET WRENCH SET

- Socket wrench sets contain the complete combination of most needed sockets.
- Chrome molybdenum steel sockets and chrome vanadium ratchet handles.

TWS-05



TWS-05 Contents : 52pcs. per set

Contents	Size/Length(mm)
Sockets $\varnothing 6.3(1/4")$	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13
$\varnothing 12.7(1/2")$	10, 11, 12, 13, 14, 15, 17, 19, 22, 24, 27, 30, 32
Socket for 21mm plug	21 Across flats
Hex. Wrenches	1.5, 2, 2.5
Hex. Bits	3, 4, 5, 6, 7, 8
Phillips Bits	#1, #2, #3
Slotted Bits	4, 5.5, 7
Plastic Spinner Handle	200
Ratchet Handles	125, 300
Extension Shafts	100, 125, 250
T Type Sliding Handles	115, 300
Universal Joints	35, 70
Bit Adapters	25, 30
Steel Case	450×200×55

TWS-01・TWS-02



TWS-01・02 Contents : 16pcs. per set

Contents	Size/Length(mm)
Sockets $\varnothing 6.3(1/4")$	TWS-01 5/32, 3/16, 7/32, 1/4, 9/32, 5/16
	TWS-02 11/32, 3/8, 13/32, 7/16, 1/2 (inch)
	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13 (mm)
Ratchet Handles	125
Extension Shafts	50, 150
Universal Handle	125
Cross Bar	115
Steel Case	180×120×30

TWS-03



TWS-03 Contents : 20pcs. per set

Contents	Size/Length (mm)
Sockets $\varnothing 6.3(1/4")$	4, 4.5, 5, 5.5, 6, 7, 8
	$\varnothing 9.5(3/8")$ 9, 10, 12, 13, 14, 17, 19
Adaptor 3/8"→1/4"	25
Plastic Spinner Handle	150
Ratchet Handle	200
Extension Shaft	75, 150
Socket for 21mm Plug	21 Across flats
Steel Case	292×145×35

TWS-04



TWS-04 Contents : 34pcs. per set

Contents	Size/Length(mm)
Sockets $\varnothing 6.3(1/4")$	4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 13
Hex. Bits	3, 4, 5, 6, 8, 10
Phillips Bits	#1, #2, #3, #4
Slotted Bits	4, 5.5, 7
Hex Wrenches	1.5, 2, 2.5
Plastic Spinner Handle	150
Ratchet Handle	125
Extension Shaft	50, 100
T Type Sliding Handle	115
Universal Joint	35
Steel Case	200×110×30

- with quick drive ring



Cutting and Processing

TR-01~04・11

RoHS TAPER REAMER

- For reaming holes in sheet metal, aluminum and similar material
- For deburring the edge of a pipe
- Material : Carbon steel



TR-03




(mm)			
Item No.	Size	Blade	Length
TR-01	φ3.0~12	81	113
TR-02	φ4.0~16	85	118
TR-03	φ5.0~20	95	130
TR-04	φ6.0~30	107	145
TR-11	φ3.0~11.5	81	127

※Hardness: HRC 55~58

1/4" Hex shank

TR-11

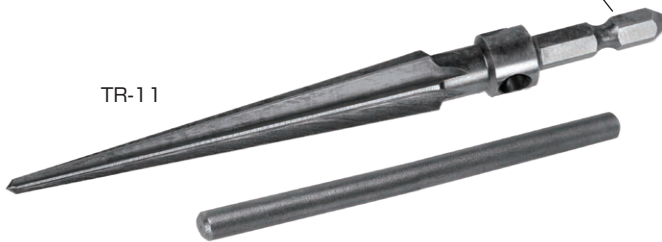

TR-11 attached to 3-jaw chuck in a cordless drill or driver



TR-11 fixed to an ordinary driver handle(Hex.6.35mm)

TT-01・02

RoHS TAP HANDLE

TT-03・10~16

RoHS TAP/TAP SET

TT-01



TT-02



TAP HANDLE (mm)

Item No.	Capacity	Length
TT-01	M1~6.5	170
TT-02	M2~6.0	85 x 60



- Primary, Second & Finishing Taps (3pcs./set)



TAP (mm)

Item No.	Size	Pitch
TT-10	1.4	0.3
TT-11	1.7	0.35
TT-12	2.0	0.4
TT-13	3.0	0.5
TT-14	4.0	0.7
TT-15	5.0	0.8
TT-16	6.0	1.0

◀ TT-03

CONTENTS

- Tap, 4pcs(2, 3, 4, 5mm)
- Tap Handle(TT-02)

TP-20・23・24

RoHS MINI DRILL CHUCK/PIN VISE

- Used for various applications to drilling, tapping, piercing (handy reamer) grinding, etc.
- Featuring precision clamping chuck (collet)
- Material:Body-Brass Collet-Steel with plating

Fitting to electric driver
with 2 pcs. of Single head collets

TP-20



Double ended shank (Through-hole body)
with 2 pcs. of Double-head collets

TP-23














Single end with swivel head
with 2 pcs. of Double-head collets

TP-24



Remove the swivel head to put a collet inside.



(mm)							
Item No.	Collet Type	Diameter of Drill Bit		Shank	Joint	O.A. Length	Weight (g)
TP-23	Double Head	 0.1~1.2	2.0~2.5 	ϕ8	—	105	35
		 1.2~2.0	2.5~3.2 				
TP-24	Double Head	 0.1~1.2	2.0~2.5 	ϕ8	—	95	40
		 1.2~2.0	2.5~3.2 				
TP-20	Single Head	 0.7~1.9		—	 6.3	50	20
		 1.9~3.0					


TV-25・26・27

 YANKEE VISE

- With special clasp ideal for thin plate, round bar and square lumber.
- The reverse of the clasp to be used as a flat clasp.



TV-26



Item No.	Size(mm)							Clamp Force Max.(KN)
	A	B	C	D	E	F	G	
TV-25	50	61	55	32	53	145	27.5	3
TV-26	65	76	70	32	53	170	27.5	4
TV-27	75	84	78	38	62	181.5	33	5

TF-06・07・10

FILE



TF-07



TF-10

Item No.	Shape	Length (mm)	Grip
TF-06		200	Rubber
TF-07			
TF-10			

TN-01W~05W



JEWELLER'S SAW

- Light weight, durable and well-balanced frame design.
- Wooden handle is shaped for sure and comfortable grip.
- Saw frame is designed to be adjustable in length and capable of using even broken pieces of saw blades. (TN-04W/05W)



TN-01W

TN-03W

TN-05W

<※Frame length adjustable(TN-04W/05W)>

- Blade contained TN-17 (standard) TN-13 & 15 (spare)
- The ideal saw blades made of SKS special steel alloy with the technological know-how.
- Entirely heat treated, best quality saw blades available.

Item No.	Frame Size (WxD)	Weight(g)
TN-01W	125 x 75 mm	135
TN-02W	125 x 125 mm	160
TN-03W	110 x 275 mm	215
TN-04W	~145 x 75 mm	170
TN-05W	~145 x 125 mm	190

TN-11~18



SAW BLADES

- Applications: Aluminum, Brass, Sheetmetal, etc.
- Overall length: 130mm



TN-17

Item No.	Nominal Size	Blade Thick (mm)	Notches/25mm
TN-11	#3/0	0.24	61
TN-12	#2/0	0.26	56
TN-13	#0	0.28	53.5
TN-14	#1	0.30	51
TN-15	#2	0.34	43
TN-16	#3	0.36	40.5
TN-17	#4	0.38	38
TN-18	#5	0.40	35.5

TM-04・05



STEEL RULE

TM-04



Item No.	Scale
TM-04	15 cm
TM-05	30 cm

TZ-02・04



HANDY SAW

TZ-02 Adjustable blade



Item No.	Blade Size	Shape	Length
TZ-02	250mm24notches	Plastic Grip	260mm

- Replacement blade TZ-04 (12pcs/dozen)

TZ-05・13



SCRIBER

- Metal work to mark a point or draw a line on the workpiece.

SCRIBER

TZ-05

- 210mm

CARBIDE SCRIBING PEN

TZ-13

- 138mm
- Retractable tip for safe storage and carrying



TZ-07・14

PUNCH

PUNCH

TZ-07


- 100mm



AUTO CENTER PUNCH

TZ-14

- 138mm
- Carbide tip
- Press down the tip to punch a hole automatically.

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

TF-11~45**JET BLACK FILE**

High performance, Rust-resistant, Black coated files

**PRODUCT VIDEO**

Grinding comparison

Item No.	Shape	Coarseness	Blade length	O.A. length	Wgt (g)
TF-11	□	Second-cut	100	215	58
TF-12	△				59
TF-13	○				41
TF-14	□				52
TF-15	△				56
TF-21	□	#3	100	200	21
TF-22	△				18
TF-23	○				16
TF-24	□				19
TF-25	△				17
TF-31	□	Smooth-cut	100	215	58
TF-32	△				61
TF-33	○				40
TF-34	□				55
TF-35	△				58
TF-41	□	Second-cut	175	325	166
TF-42	△			300	153
TF-43	○			300	109
TF-44	□			325	112
TF-45	△			325	166



ORDINARY FILES
Clogged with filing debris




Burr on each file tooth is eliminated before black coating, good for high and lasting performance of filing.



Sharp edge of teeth



Rust-resistant black coating



Side face

Smooth machined surface, ideal for filing a corner without damage. (TF-11, 21, 31, 41 only)

TFS-07·10·20·30**JET BLACK FILE SET**

- A set of Jet Black Files in a roll-up storage with a strap



TFS-10

W240×L240(mm)



W50×L240×H50(mm)

Item No.	Shape					Brush	Coarseness	Blade length	O.A. length	Wgt (g)
	□	△	○	□	△					
TFS-07	TF-11	TF-12	TF-13	-	-	-	Second-cut	100	215	274
	TF-21	TF-22	TF-23	-	-	-	Precision	100	200	
TFS-10	TF-11	TF-12	TF-13	TF-14	TF-15	○	Second-cut	100	215	349
TFS-20	TF-21	TF-22	TF-23	TF-24	TF-25	○	Precision	100	200	170
TFS-30	TF-31	TF-32	TF-33	TF-34	TF-35	○	Smooth-cut	100	215	371

TFS-01·02**FILE SET**

- Normal Type (Second-cut)
- Ideal for metalworking of steel, die-cast, aluminum, etc.



TFS-01



TFS-02
(TF-06~10)

Item No.	Contents	□	△	○	□	△	Length(mm)
TFS-01	5	●	●	●	●	●	185
TFS-02	5	●	●	●	●	●	200

Sets and Cases



ENGINEER.
Even one of my belongings I emphasize on policy.
It is neither function nor design only. I represent to create myself
with an intellectual acting properties.

KS-01**MY KIT**

- Pocketable & reasonable kit for daily use

**Set of 7 items**

NSX-04	Micro nippers	115mm
PS-04	Miniature pliers	115mm
PTS-01	Tweezers	125mm
DM-22	⊕Precision driver #3/0	
DM-33	⊖Precision driver 1.8mm	

DS-03	⊕Screwdriver	#00
DS-13	⊖Screwdriver	2.6×75
●Case : 135×90×30mm		
●Weight : 0.25kg		

KS-02**MY KIT**

- Simple & basic tool kit

**Set of 11 items**

NS-03	Micro nippers	125mm
PS-01	Miniature long nose pliers	125mm
PTS-01	Tweezers	125mm
DS-03	⊕Screwdriver	#00
DS-23	⊕Screwdriver	#0
DS-33	⊖Screwdriver	4×75

DH-15	Hex driver	1.5mm
DH-20	Hex driver	2.0mm
DH-25	Hex driver	2.5mm
	File(Half-round)	
	Cutter knife, S	

- Case : 220×145×35mm
- Weight : 0.5kg

KS-20**MY KIT**

- Pocket-sized and functional tool kit
- with Circuit testing driver handle

**Set of 12 items**

NN-45	Slant edge nippers	125mm
PR-15	Long nose pliers	125mm
PTS-01	Tweezers	125mm
Circuit testing driver with spare bits	Phillips bit	⊕#00
	Phillips bit	⊕#1
	Phillips bit	⊕#2
	Slotted bit	⊖2.5mm
	Slotted bit	⊖3.5mm
	Slotted bit	⊖5.5mm
	Hex nut bit	⊖5.5mm
	Awl (square)	
	Cutter knife (S)	

- Case : 160×90×35mm
- Weight: 0.5kg



Circuit testing handle
(AC80~250V/DC100~300V)

KS-27**MY KIT**

- Pocket-sized tool kit, ideal for electronics
- with Penlight & Circuit testing driver

**Set of 13 items**

NS-03	Micro nippers	125mm
PS-01	Miniature long nose pliers	125mm
PT-06	Tweezers (J)	120mm
Circuit testing driver with spare bits	Phillips bit	⊕#1
	Phillips bit	⊕#2
	Slotted bit	⊖3.5mm
	Slotted bit	⊖5.5mm
DM-22	⊕Precision driver	#000
DM-24	⊕Precision driver	#0
DM-32	⊖Precision driver	1.2mm
DM-34	⊖Precision driver	2.3mm
TWH-01	Hex key wrench set	
	Mini penlight (AAA type)	

- Case : 160×90×35mm
- Weight: 0.6kg



Circuit testing handle
(AC80~250V/DC100~300V)

KS-05**MAINTENANCE KIT**

- For field maintenance service
- Environment-friendly polyester-made case (Lining: made of nylon)



with strap (detachable)

Elastic band

■Set of 13 items

NK-15	Diagonal nippers	125mm	PTS-01	Tweezers	125mm
PR-16	Long nose pliers	150mm	TWH-01	Hex key wrench set	
PC-06	Combination pliers	150mm	SKC-30	Soldering iron	26W
DS-03	⊕Screwdriver	#00	SW-30	Solder	20g
DS-23	⊕Screwdriver	#0		File (flat)	
DS-64	⊕Screwdriver	#2			
DS-33	⊖Screwdriver	4×75			
DA-02	Alignment screwdriver	150mm			


- Case : 255×150×50mm
- Weight : 1kg

Soldering Iron [220V~240V] available by assortment of SKC-30 as per Page 71

KSC-05**MAINTENANCE KIT**

Cordless soldering iron (with Multi-holder) expands the utility of traditional tool kits.

- For field maintenance service
- Environment-friendly polyester-made case (Lining: made of nylon)

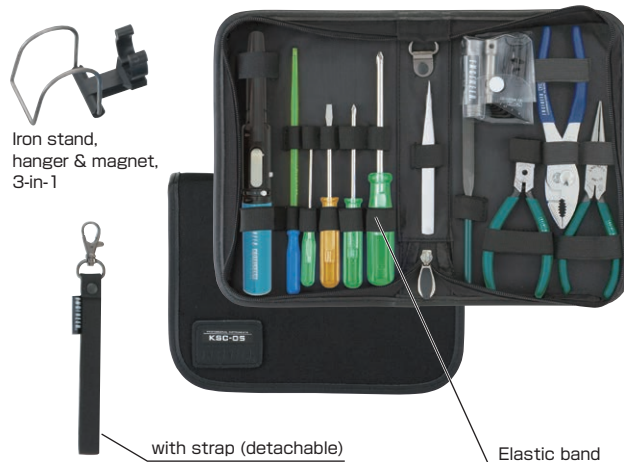

Iron stand, hanger & magnet, 3-in-1

with strap (detachable)

Elastic band

**■Set of 14 items**

NK-15	Diagonal nippers	125mm	PTS-01	Tweezers	125mm
PR-16	Long nose pliers	150mm	TWH-01	Hex key wrench set	
PC-06	Combination pliers	150mm	SK-60	Cordless soldering iron(w/cap)	
DS-03	⊕Screwdriver	#00	SK-66	Hot blow tip	
DS-23	⊕Screwdriver	#0	SW-30	Solder	20g
DS-64	⊕Screwdriver	#2		File (flat)	
DS-33	⊖Screwdriver	4×75			
DA-02	Alignment screwdriver	150mm			

- Case : 255×150×50mm
- Weight : 1kg

KS-06(KSE-06)**MAINTENANCE KIT**

- For field maintenance service (Complete Set)

**■Set of 20 items**

NN-46	Slant edge nippers	150mm	SKC-40	Soldering iron	32W
PR-16	Long nose pliers	150mm	SW-30	Solder	20g
PD-06	Side cutting pliers	150mm	TWM-02	Adjustable angle wrench	200mm
PC-06	Combination pliers	150mm		File (flat)	
PTS-02	Tweezers	125mm		File (round)	
DS-03	⊕Screwdriver	#00	TM-04	Steel rule	150mm
DS-23	⊕Screwdriver	#0	TWH-04	Hex key wrench set (8 pcs.)	
DS-64	⊕Screwdriver	#2		Cutter knife (S)	
DS-13	⊖Screwdriver	2.6×75			
DS-54	⊖Screwdriver	5.5×100			
DN-05	Nut driver	5.5mm			
DA-02	Alignment screwdriver	150mm			

- Case : 305×220×45mm
- Weight : 2kg

KSE-06 Case only

Soldering Iron [220V~240V] available by assortment of SKC-30 as per Page 71

KSC-06**MAINTENANCE KIT**

Cordless soldering iron (with Multi-holder) expands the utility of traditional tool kits.

- For field maintenance service (Complete Set)

**■Set of 21 items**

NN-46	Slant edge nippers	150mm	SK-60	Cordless soldering iron(w/cap)	
PR-16	Long nose pliers	150mm	SK-66	Hot blow tip	
PD-06	Side cutting pliers	150mm	SW-30	Solder	20g
PC-06	Combination pliers	150mm	TWM-02	Adjustable angle wrench	200mm
PTS-02	Tweezers	125mm		File (flat)	
DS-03	⊕Screwdriver	#00		File (round)	
DS-23	⊕Screwdriver	#0	TM-04	Steel rule	150mm
DS-64	⊕Screwdriver	#2	TWH-04	Hex key wrench set (8 pcs.)	
DS-13	⊖Screwdriver	2.6×75		Cutter knife (S)	
DS-54	⊖Screwdriver	5.5×100			
DN-05	Nut driver	5.5mm			
DA-02	Alignment screwdriver	150mm			

- Case : 305×220×45mm
- Weight : 2kg



SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

KS-03**TOOL KIT**

- General electronic & job training use



■Set of 12 items

NN-45	Slant edge nippers	125mm
PR-16	Long nose pliers	150mm
DS-03	⊕Screwdriver	#00
DS-23	⊕Screwdriver	#0
DS-64	⊕Screwdriver	#2
DS-33	⊖Screwdriver	4×75
DA-01	Alignment screwdriver	100mm
PTS-01	Tweezers	125mm
	Soldering iron	30W
	Solder	
	Solder paste	
	Soldering stand	

●Case : 240×115×45mm

●Weight : 0.8kg

Soldering Iron [220V~240V] available

KS-04(KSE-04)**TOOL KIT**

- General electronic & job training use
- Environment-friendly polyester-made case (Lining: made of nylon)



■Set of 14 items

NN-45	Slant edge nippers	125mm	DN-05	Nut driver	5.5mm
PR-16	Long nose pliers	150mm	PTS-02	Tweezers	125mm
PD-06	Side cutting pliers	150mm	SKC-30	Soldering iron	26W
DS-03	⊕Screwdriver	#00		Solder	
DS-23	⊕Screwdriver	#0		Solder Paste	
DS-64	⊕Screwdriver	#2		Soldering stand	
DS-33	⊖Screwdriver	4×75		Cutter knife (S)	

●Case : 255×150×50mm

●Weight : 1.1kg

KSE-04 Case only

Soldering Iron [220V~240V] available by assortment of SKC-30 as per Page 71

KSC-04**TOOL KIT**

Cordless soldering iron (with Multi-holder) expands the utility of traditional tool kits.

- General electronic & job training use
- Environment-friendly polyester-made case (Lining: made of nylon)



Iron stand, hanger & magnet, 3-in-1

with strap (detachable)

Cordless soldering iron

■Set of 15 items

NN-45	Slant edge nippers	125mm	DS-33	⊖Screwdriver	4×75
PD-06	Side cutting pliers	150mm	SK-60	Cordless soldering iron(w/cap)	
PR-16	Long nose pliers	150mm	SK-66	Hot blow tip	
PTS-02	Tweezers	125mm		Solder	
DN-05	Nut driver	5.5mm		Solder Paste	
DS-03	⊕Screwdriver	#00		Soldering stand	
DS-23	⊕Screwdriver	#0		Cutter knife (S)	
DS-64	⊕Screwdriver	#2			

●Case : 255×150×50mm

●Weight : 1.1kg

KS-08**ELECTRONICS KIT**

- For electronics, PC maintenance, PC modification, etc.
- Environment-friendly polyester-made case (Lining: made of nylon)



■Set of 21 items

NS-03	Micro nippers	125mm
PS-01	Miniature long nose pliers	125mm
PTS-01	Tweezers	125mm
SS-01	Solder sucker	
SS-08	IC extractor	
SS-22	Spring hook	
	Soldering iron	30W
	Inspection mirror	
SWU-04	Solder wick	2.8mm
	Solder (1m)	
TWH-01	Hex key wrench set	
DN-05	Nut driver	5.5mm
DM-22	⊕Precision driver	#000
DM-33	⊖Precision driver	1.8mm
	Phillips bit	⊕#00
	Phillips bit	⊕#0
	Phillips bit	⊕#1
	Phillips bit	⊕#2
	Slotted bit	⊖3.5mm
	Cutter knife (S)	
	File (half-round)	

●Case : 255×150×50mm

●Weight : 1.0kg

Soldering Iron [220V~240V] available

KS-14**ELECTRONICS KIT**

- For electronics, office automation maintenance, etc.
- Environment-friendly polyester-made case (Lining: made of nylon)

**■ Set of 18 items**

NS-03	Micro nippers	125mm
PR-16	Long nose pliers	150mm
PTS-01	Tweezers	125mm
PZ-56	Screw removal pliers	175mm
DP-03	Pro-use driver	⊕#00
DP-24	Pro-use driver	⊕#0
DP-64	Pro-use driver	⊕#2
DP-34	Pro-use driver	⊖4.3mm
DN-05	Nut driver	5.5mm
	Mini spanner	5.5×7
	Mini spanner	8×9
TM-04	Steel rule	150mm
TZ-05	Scriber	220mm
TWH-01	Hex key wrench set	
TWM-03	Smart monkey wrench	150mm
SL-02	Inspection mirror	
	Cutter knife (S)	
	File (half-round)	

- Case : 250×180×50mm
- Weight : 1.3kg

KS-28(KSE-28)**TOOL KIT**

Basic assortment of general purpose tools and free space in mesh pocket for your own use

- Soft touch EVA plastic case with double panel
- A4 size pocket is provided on the reverse of upper panel which is capable of documents, measuring instrument or notebook P.C. (max. 40mm thick)
- Tool panel is easily detachable with hook, which is convenient for field work.



330mm wide pocket
on the reverse



● Free space in
mesh pocket

● Clear pocket
(detachable)

■ KS-28 Set of 22 items

NN-46	Slant edge nippers	150mm
PR-16	Long nose pliers	150mm
PD-06	Side cutting pliers	150mm
PZ-55	Screw removal pliers	150mm
PW-08	Pump pliers	200mm
PTS-01	Tweezers	125mm
DA-01	Alignment driver	100mm
DKD-01	Circuit testing driver	
DN-05	Nut driver	5.5mm
DG-05	⊕/⊖ Cushion driver	#2/⊖6
DG-21	⊖ Mini soft driver	3×100mm
DG-24	⊕ Mini soft driver	#0×100mm

SKC-30	Soldering iron	26W
SS-05	Tip cleaner with stand	
SW-30	Solder	20g
	File (half-round)	
	Measuring tape	2m
TS-05	Open-End wrench set	
TWH-01	Hex key wrench set	
TWM-02	Adjustable angle wrench	200mm
	Cutter knife (S)	
	Vinyl tape	

- Case : 405×306×100mm (Ext.)
380×276×73mm (Int.)
- Weight : 3.7kg

◆ KSE-28 Case and panel 1.8kg

⚡ Soldering Iron [220V~240V] available by assortment of SKC-30 as per Page 71

OPTION Cordless Soldering Iron can be assorted instead of SKC-30 at customer's option.

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

KS-11 (KSE-11)

TOOL KIT

Field service and maintenance of production lines & machinery

KS-11 (Tool kit)

KSE-11 (Case and panel only) - Net 5 kg




■ Set of 60 items

NS-03	Micro nippers	125 mm	TWM-02	Adjustable angle wrench	200 mm
NN-46	Slant edge nippers	150 mm	TS-05	Mini spanner set (5 pcs.)	
PS-01	Miniature pliers	125 mm	TR-03	Taper reamer	20 mm
PR-46	Needle nose pliers	150 mm		Hammer	
PD-06	Side cutting pliers	150 mm		Measuring tape	2m
PC-06	Combination pliers	150 mm	TWH-01	Hex key wrench set	
PW-10	Pump pliers	250 mm	TWS-02	Socket wrench set	
PA-09	Micro connector pliers		TFS-02	File set	
PT-01	Tweezers	125 mm	TZ-02	Handy saw	
PH-03	Lock holder	150 mm	SKC-40	Soldering iron	32W
PH-33	Electronic snips	145 mm	SW-31	Solder	150g
DS-03	⊕Screwdriver	#00	SS-05	Tip cleaner with stand	
DS-24	⊕Screwdriver	#0	SS-02	Solder sucker	
DS-44	⊕Screwdriver	#1	SS-08	IC Extractor	
DS-64	⊕Screwdriver	#2	SS-21	Spring hook	
DS-13	⊖Screwdriver	2.6×75	SS-22	Spring hook	
DS-34	⊖Screwdriver	4×100	SL-02	Inspection mirror	
DA-02	Alignment driver	150 mm	TP-35	Magnetic pick-up tool	
DM-22	⊕Precision driver	#3/0	KP-03K	Parts box	
DM-23	⊕Precision driver	#00	SWU-04	Solder wick	2.8 mm
DM-33	⊕Precision driver	1.8 mm		Vinyl tape	
DM-34	⊖Precision driver	2.3 mm		Pen light	
DZ-24	Screw-holding driver	#0		Cutter knife (L)	
DG-12	Long pro-grip driver	#2×250 mm	ZC-19	Oil	20cc
DN-02	Nut driver	4 mm		Flat brush	
DN-04	Nut driver	5 mm		Poly bottle 50cc/2pcs.	
DN-05	Nut driver	5.5 mm		Poly bottle 100cc/2pcs.	
DN-07	Nut driver	7 mm		Paper wiper	
DN-08	Nut driver	8 mm	SD-10	Digital Multimeter	
DR-04	Ratchet stubby driver set				
DZ-08	Offset driver set				

- Aluminum Case :
455×330×176 (Ext.)
440×315×168 (Int.)
- Weight : 12kg

⚡ Soldering Iron 220V~240V available by assortment of SKC-30 as per Page 71



H=HL+HB

KS-12

ATTACHE TOOL KIT

Stylish and functional tool kit



■ Set of 25 items

NS-03	Micro nippers	125 mm
PS-01	Miniature pliers	125 mm
PD-06	Side cutting pliers	150 mm
PTS-01	Tweezers	125 mm
DA-51	Ceramic alignment driver	
DG-21	⊖Mini soft driver	3×0.4
DG-22	⊕Mini soft driver	#00
DG-24	⊕Mini soft driver	#0
DG-01	⊖Pro grip driver	5.5×0.7
DG-04	⊕Pro grip driver	#2
DST-05	⊕Reversible stubby driver	#2 / ⊖6.3
SD-10	Digital multimeter	
SKC-30	Soldering iron	26W
SS-02	Solder sucker	
SS-08	IC extractor	
SS-10	PCB connector extractor	
SW-30	Solder	20g
TWM-03	Smart monkey wrench	150 mm
TWH-04	Hex key wrench set	
TS-05	Mini spanner set (5 pcs.)	
TM-04	Steel rule	150 mm
PA-06	Wire stripper	
SWU-04	Solder wick	2.8 mm
SL-50	Pocket loupe	
	Cutter knife (S)	

● Dividing plate for soldering box & tester



(mm)							
Item No.	L	W	H	HL	HB	Weight(kg)	Color
KS-12	465 (450)	345 (320)	129 (105)	(35)	(70)	6	Black

(): Internal size

⚡ Soldering Iron 220V~240V available by assortment of SKC-30 as

per Page 71

KSE-12**ATTACHE CASE WITH EMPTY PANEL**


- Neatly designed for a stylish appearance
- Incorporating empty tool panel and document pocket



Dividing panel is easily detachable with Velcro.



- Speedy and easy attachment of empty panel



$$H = HL + HB$$

(mm)

Item No.	L	W	H	HL	HB	Weight(kg)	Color
KSE-12	465 (450)	345 (320)	129 (105)	(35)	(70)	3.3	Black

(): Internal size

KA-22**ATTACHE CASE (WIDE TYPE)****Attractive and functional multipurpose case**

- Light-weighted & durable case made of ABS resin
- Nylon 100% (Hypalon) interior finish for more than just business
- Tool panel (option) can be hidden from free space by dividing plate.
- Comes with multipurpose pockets

BODY

This handsome case is molded of ABS plastic with simple form line, lightweight and durable construction. Suggest a new field of use and produce the joy in possession of the case.

DIAL LOCK


Add security with combination dial lock in the center and two draw latches.

**HANDLE**

Designed to fit the hand and reduce hand fatigue.

**INSIDE**

Besides business use, add functional and fashionable pockets and storage pouch to meet multipurpose requirements. Offer clear see-through mesh type pocket at the back of dividing plate.



(Remark)

The dimensions indicate the internal sizes but subject to within a tolerance allowed.
 $H = HL + HB$

(mm)

Item No.	L	W	H	HL	HB	Weight(kg)	Color
KA-22	450	320	105	35	70	2.4	Black

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS


CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

KA-15**ABS ATTACHE CASE**

(mm)						
Item	L	W	H	HL	HB	Weight(kg)
KA-15	440	320	92	32	60	2

KA-50·51**ALUMINIUM CASE**

- Featuring a matt surface in silver color
- Streamline appearance



KA-50



KA-51



● Durable handle


Internal Size (mm)						
Item	L	W	H	HL	HB	Weight(kg)
KA-50	440	320	105	40	65	2.6
KA-51	440	320	130	50	80	2.8

KA-57**ALUMINIUM CASE**


- Stylish case coming with shock-proof sponges and tool panel



Wavy formed urethane (upper shell) and cut sponges (body) protect contents such as camera, camcorder, etc.



Each cut sponge (15x15mm) can be removed so as to fit the size and shape of content.



Stylish round corner



Tool panel affixed to shell with Velcro and detachable


External dimensions (Internal dimensions) (mm)						
Item No.	L	W	H	HL	HB	Tool Panel (single)
KA-57	450(435)	330(314)	135(120)	(52)	(68)	420×300
						Weight(kg)
						4.1

KA-30・42~44

- Heavy-duty type
- Made of 1.5mm-thick rugged aluminium of anodized finish
- All the corners reinforced with aluminum frame and rivets
- Case inside in melton finish



●Durable handle

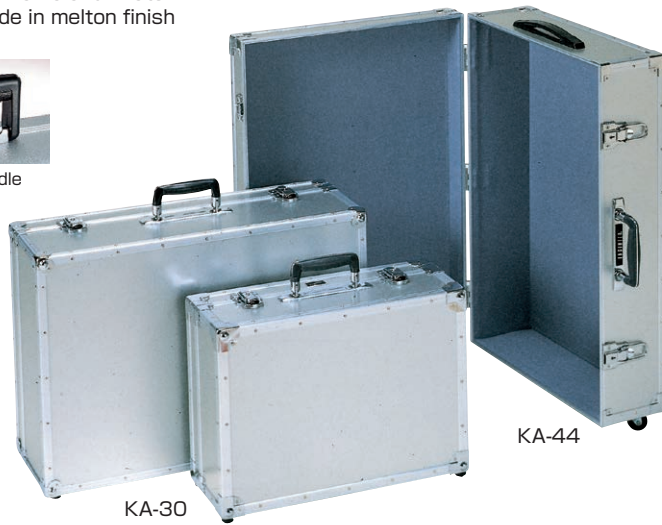

KA-30


KA-44

ALUMINIUM CASE

Water-repellent, anti-static or cleanroom type is available at option.



KA-44 is originally equipped with casters. Other models can be equipped with casters at option.



(Remark)

The dimensions indicate the internal sizes but subject to within a tolerance allowed.

H = HL+HB

Item No.	Internal Size (mm)					(kg)	
	L	W	H	HL	HB	Wgt.	Max.Load
KA-30	440	315	165	55	110	4.3	15
KA-42	540	320	160	50	110	4.6	
KA-43	590	410	205	50	155	6.2	20
KA-44	650	450	197	60	137	7.4	

KAC-30・42

- Constructed of aluminum sheets without any accessories nor material generating dust
- KAC-42 is ideal for storage of precision instruments in cleanroom



KAC-30

KAC-42



●Durable handle

ALUMINIUM CASE FOR CLEANROOM

Item No.	Internal Size (mm)					(kg)	
	L	W	H	HL	HB	Wgt.	Max.Load
KAC-30	440	315	165	55	110	4	15
KAC-42	540	320	160	50	110	4.7	

KA-54

- Featuring a glossy surface in black color Streamline appearance



Item	(mm)					
	L	W	H	HL	HB	Weight(kg)
KA-54	440	320	130	50	80	2.8

ALUMINIUM ATTACHE CASE

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

KP-02~03 (KP-96~97)

 PARTS BOX

Durable transparent box, ideal for transporting, classification and storage of small parts.

- Lightweight, compact and durable component box made of polypropylene
- Interchangeable dividing plates can be configured to create storage space
- See-through, transparent box.
- With article labels.

- ◇ Optional dividing plate set
 KP-96 : 6 pcs./set adaptable to KP-02
 KP-97 : 6 pcs./set adaptable to KP-03




● KP-02
 Ext. Size : 207×145×40mm
 12 pcs. of dividing plates included



● KP-03
 Ext. Size : 255×190×40mm
 16 pcs. of dividing plates included

KP-02K•03K (KP-96•97)

 PARTS BOX (HEAVY DUTY TYPE)

Heavy duty transparent parts box, ideal for classification and storage

- Super clear transparent lid owing to shock-proof polycarbonate resin
- Micro-rib system of divider setting
- Material: Lid – Polycarbonate
 Body & Divider – Polypropylene
 Latch – ABS resin


- ◇ Optional dividing plate set
 KP-96 : 6 pcs./set adaptable to KP-02K
 KP-97 : 6 pcs./set adaptable to KP-03K



● KP-02K
 Ext. Size : 207×145×40mm
 18 pcs. of dividers included



● KP-03K
 Ext. Size : 255×190×40mm
 32 pcs. of dividers included

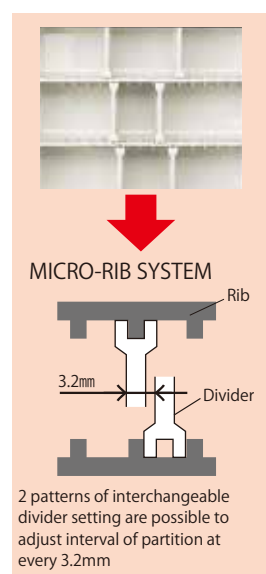

KP-04

 MINIATURE BOX

- Most suitable for electronic parts and other small components.
- Compact, lightweight and portable.
- Material: Styrene resin(lid), Polypropylene (body).
- External Size: 120×92×25mm



KP-51•52

 IC STORAGE BOX

- Compact IC storage box made of anti-static plastic body
- Comes with 10mm-thick high density conductive foam (Surface resistivity less than $5 \times 10^6 \Omega$)



KP-51
 ● External Size : 80×135×25
 ● Internal Size : 75×130×19



KP-52
 ● External Size : 230×145×28
 ● Internal Size : 219×134×22

Soldering Equipment



SK-30/40SERIES**SOLDERING IRON (100V)**

Excellent built-in ceramic heater. Compact & light-weight design suitable for accurate soldering operations

- High efficient ceramic heater permits quick heat-up, enabling soldering operation only in about 1 minute.
- The use of a small connector connecting heater and power cord permits exchange of heaters with one touch.
- Short length from grip to tip for easy operation
- Screw type tip permits easy exchange of tips.
- Perfect for accurate soldering operation with sharp soldering tip (long life and non corrosive).
- With heat-resistance cap for handy storage after use. (SKC-30/31/32/40/41)

■ SK-30~41

Grip made of reinforced glass fiber resin.

SK-30




■ SKC-30~41

With Heat-Resistant Cap.


SKC-32



SK-30/40SERIES Three functions

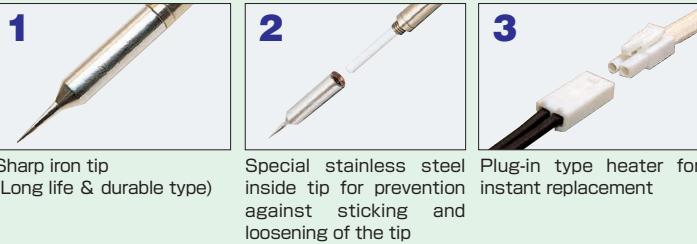

■ Time/Temp. Chart

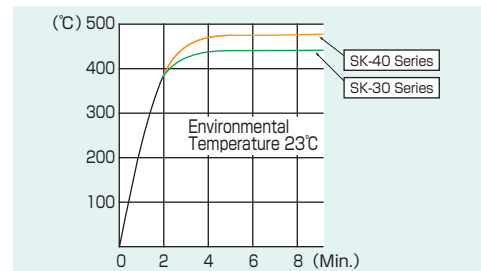**SK-30 SERIES**

■ Specification


Item No.	Max.Tip Temp.	Watt	Tip	L'gth	Wgt(g)	Rated Voltage	Insulation Resistance
SK-30	400℃	26W	ST-10	202mm	130	100V	100MΩ
SKC-30							
SK-31	440℃		ST-11				
SKC-31							
SK-32	390℃		ST-14	204mm			
SKC-32							

■ SKC with Heat-Resistant Cap.

⚡ 220V 230V 240V are also available. REF. Page 71

Caution Ceramic heater is not elastic and may be broken by excess shock. Please refrain from beating and wrenching.

■ REPLACEMENT PARTS

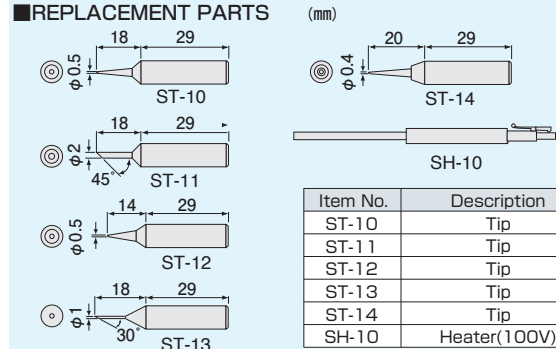

Item No.	Description
ST-10	Tip
ST-11	Tip
ST-12	Tip
ST-13	Tip
ST-14	Tip
SH-10	Heater(100V)

SK-40 SERIES


■ Specification

Item No.	Max.Tip Temp.	Watt	Tip	L'gth	Wgt(g)	Rated Voltage	Insulation Resistance
SK-40	450°C	32W	ST-20	204mm	130	100V	100MΩ
SKC-40							
SK-41	470°C		ST-21				
SKC-41							

■ SKC with Heat-Resistant Cap.

Caution Ceramic heater is not elastic and may be broken by excess shock. Please refrain from beating and wrenching.

■ REPLACEMENT PARTS

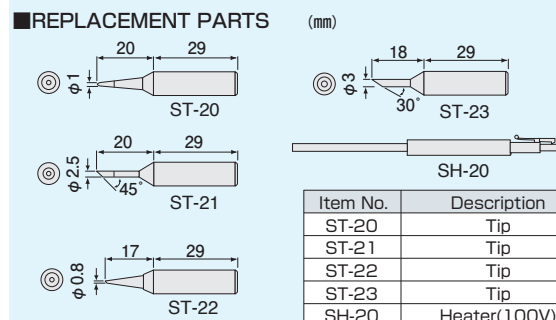

Item No.	Description
ST-20	Tip
ST-21	Tip
ST-22	Tip
ST-23	Tip
SH-20	Heater(100V)

SK-30 SERIES**SOLDERING IRON (220~240V)**

Excellent built-in ceramic heater. Compact & light-weight design suitable for accurate soldering operations

- High efficient ceramic heater permits quick heat-up, enabling soldering operation only in about 1 minute.
- The use of a small connector connecting heater and power cord permits exchange of heaters with one touch.
- Short length from grip to tip for easy operation
- Screw type tip permits easy exchange of tips.
- Perfect for accurate soldering operation with sharp soldering tip (long life and non corrosive).
- With heat-resistance cap for handy storage after use. (SKC-30/31)

■ SK-30~31

Grip made of reinforced glass fiber resin.




■ SKC-30~31

With Heat-Resistant Cap.



SK-30SERIES Three functions

1



Sharp iron tip
(Long life & durable type)

2




Special stainless steel
inside tip for prevention
against sticking and
loosening of the tip

3



Plug-in type heater for
instant replacement

■ Time/Temp. Chart

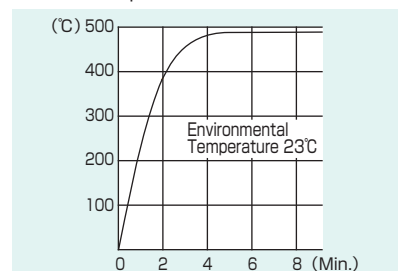**SK-30 SERIES**


■ Specification

Item No.	Max.Tip Temp.	Watt	Tip	L'gth	Wgt(g)	Rated Voltage	Insulation Resistance
SK-30	445℃	30W	ST-20	204mm	130	220 240V	100MΩ
SKC-30							
SK-31	ST-21						
SKC-31			500℃				

■ ST-22 Max. Tip Temp. 430°C ■ ST-23 Max. Tip Temp. 500 °C

Caution Ceramic heater is not elastic and may be broken by excess shock.
Please refrain from beating and wrenching.

■ REPLACEMENT PARTS

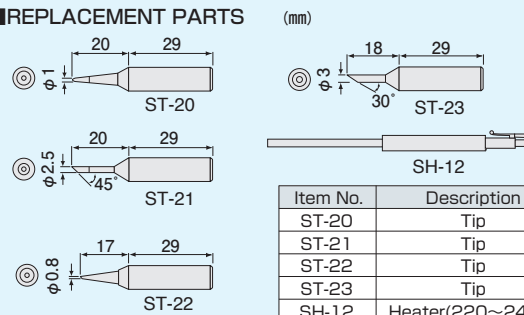

SK-60SERIES**KOTELYZER****Newly designed compact body with various functions!**

- Perfect for in-field service and maintenance where accessibility may be limited.
- Light weight for fatigue free use.
- One touch ignition and super quick heat-up (equivalent up to 60 watts).
- More than one hour continuous use capacity.




Completely cordless assures no electric leakage, no E.M.I. and free from voltage problem.




Arts, craft, and hobby use such as plastic shaping and rope cutting.

Three-in-one heat tool with soldering, hot blow, and hot knife

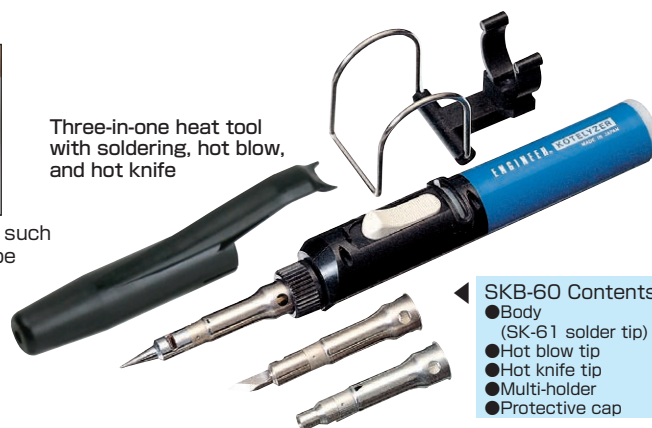

- SKB-60 Contents**
- Body (SK-61 solder tip)
 - Hot blow tip
 - Hot knife tip
 - Multi-holder
 - Protective cap

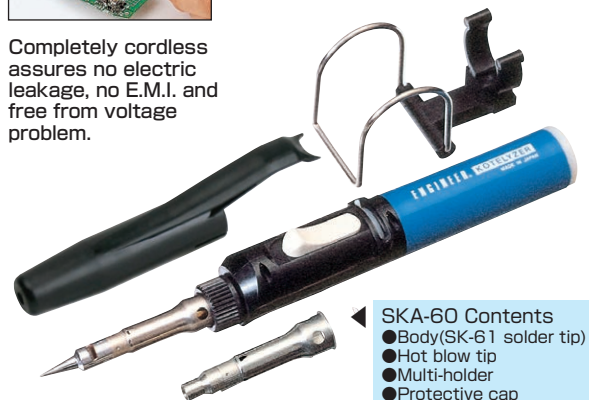


- SKA-60 Contents**
- Body (SK-61 solder tip)
 - Hot blow tip
 - Multi-holder
 - Protective cap



Pin point accurate hot air for shrink tubing and plastic welding.


Kotelyzer (SK-60) Specifications

System		Gas Catalyst Reaction System
Thermal Output	Soldering Iron	200°C~450°C (Equivalent to 15~60W electric soldering iron)
	Hot Blow	650°C MAX
Gas Container Capa.		14ml
Operation Time for One Gas Fill		Abt 1 hour 15min.
O.A. Length		216mm including cap
Weight		66g

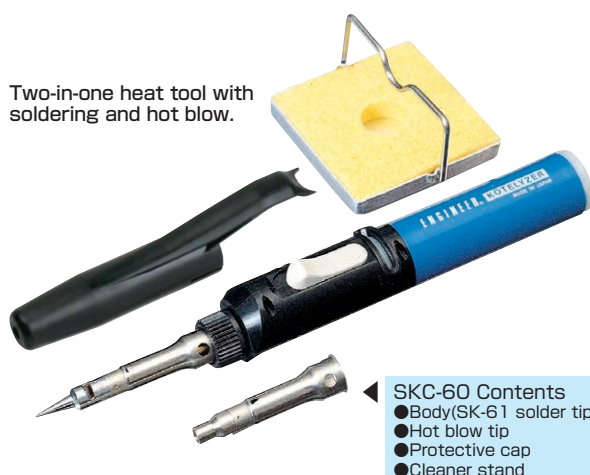

- SKC-60 Contents**
- Body (SK-61 solder tip)
 - Hot blow tip
 - Protective cap
 - Cleaner stand

Two-in-one heat tool with soldering and hot blow.

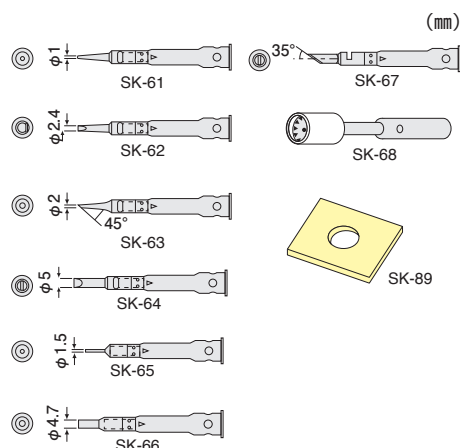SK-60SERIES**REPLACEMENT PARTS**

Item No.	Description
SK-61	Tapered needle
SK-62	Chisel
SK-63	φ2mm spade
SK-64	Chisel
SK-65	Hot blow tip
SK-66	Hot blow tip
SK-67	Hot knife
SK-68	Ceramic unit
SK-89	Cleaning sponge

● Multi-Holder is not saleable separately.

SS-08**IC EXTRACTOR**

- Ideal for extracting 8~42 pins ICs in one single operation.
- Squeeze clip and hold ICs tightly.
- Overall Length : 125mm

**SS-10****PC BOARD CONNECTOR EXTRACTOR**


- Ideal for insertion or extraction of housing connectors on the PC boards.
- Holds PC board connectors with accurately machined tip, picking them uprightly and smoothly without a cut of wire or deformity.
- Accurate tip design to insert or extract PCB connectors (straight type & right-angle type) mounted on dense PCB
- Overall Length : 112mm



SK-70SERIES

Multi-holder creates new field of cordless soldering iron!

- Perfect for in-field service and maintenance where instant heat is required.
- Super quick heat up with one touch operation.
- Completely cordless assures no electric leakage no E.M.I.
- Flameless and safe heat generating system by gas catalyst reaction.
- Variable temperature control (equivalent to 20-80 watts).

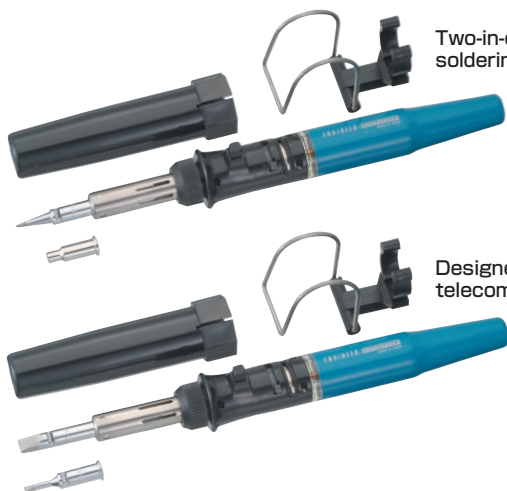

Two-in-one heat tool with soldering and hot blow.

SKC-70 Contents

- Body(SK-71 solder tip)
- Hot blow tip
- Multi-holder
- Protective cap

Designed to perform telecommunication tasks.

SKD-70 Contents

- Body(SK-79 solder tip)
- Solder tip(SK-72)
- Multi-holder
- Protective cap

KOTELYZER

Telecommunication field



SKD-70 set comes with a high-power tip for cable maintenance tasks and an accurate tip for telephone office service.

SKA-70 Contents

- Body(SK-71 solder tip)
- Hot blow tip
- Protective cap


SKB-70 Contents

- Body(SK-71 solder tip)
- Hot blow tip


Kotelyzer (SK-70) Specifications

System		Gas Catalyst Reaction System
Thermal Output	Soldering Iron	200°C~500°C (Equivalent to 20~80W electric soldering iron)
	Hot Blow	650°C MAX
Gas Container Capa.		28ml
Operation Time for One Gas Fill		Abt 4 hours (Lever position : 2)
O.A.Length		281mm including cap
Weight		110g

Three function of Multi-holder assures safe and wide task field !



1 Hanging from cable



2 Magnetic attachment




3 Stand

Multi-Holder is useable for both SK-60 series and SK-70 series.

SK-70SERIES

REPLACEMENT PARTS

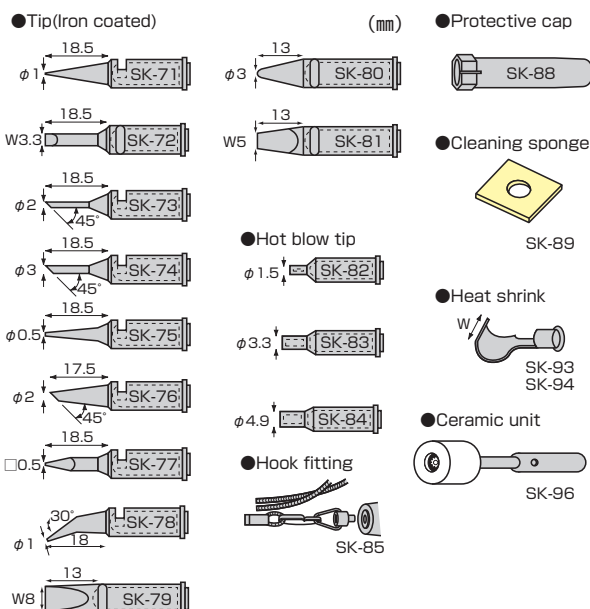

Item No.	Description
SK-71	Tapered needle
SK-72	Chisel
SK-73	φ2mm spade
SK-74	φ3mm spade
SK-75	Tapered needle
SK-76	φ2mm spade
SK-77	Tapered pyramid
SK-78	Offset tapered needle
SK-79	High powered chisel
SK-80	High powered round head needle
SK-81	High powered long taper chisel
SK-82	Hot blow tip
SK-83	Hot blow tip
SK-84	Hot blow tip
SK-85	Hook fitting
SK-88	Protective cap
SK-89	Cleaning sponge
SK-93	Heat shrink W-22
SK-94	Heat shrink W-18
SK-96	Ceramic unit

SKM-40·SK-42~47

HANDY KOTELYZER

SK-90·95

GAS REFILL

- Advanced and streamlined design
- Hot blow & powerful torch
- Improved heat-generating structure of metal catalyst
- Come with cleaner stand & solder
- Capable of continuous use in one hour



■ Soldering Iron



■ Hot Blow




■ Torch



Specifications

System		Gas Catalyst Reaction System Pressure Gas Burning System (Torch)
Thermal Output	Soldering Iron	200°C~500°C (Equivalent to 20~60W electric soldering iron)
	Hot Blow	650°C MAX
Gas Container Capa.		12ml
Operation Time for One Gas Fill		about 60 min. (Lever position: Middle)
O.A.Length		197mm Cap Included
Weight		74g

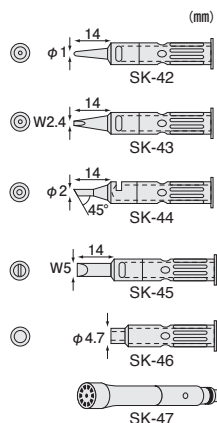

Item No.	Description
SK-42	Tapered Needle
SK-43	Chisel
SK-44	φ2mm Spade
SK-45	Chisel
SK-46	Hot blow tip
SK-47	Ejector Unit

- Please use our original gas for refill. (Butane liquefied odorless gas for industry use)



265ml



480ml

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPING

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT

ESD CHEMICALS

SD-20(SD-21~26·SD-60~88)**DESOLDERING TOOL**



DESTINATIONS ARE LIMITED FOR EXPORT

High-capacity ceramic heater and powerful motor, capable of suction and hot air blow.


- Built-in motor, diaphragm type vacuum pump, temperature adjustable circuit and indicator light.
- Low noise and low vibration due to floating mechanism.
- Minimum reaching time to the maximum vacuum and powerful suction capacity.
- Ideal for desoldering on 4-8 layered PCB's.
- No static damage to IC etc. due to carboniferous body.

INDICATOR LIGHT

When the heater is on, light goes on and when the temperature reaches set-up level, it flickers.

**●Contents**

- Carrying case
- Desoldering tool
- Spare tip ($\phi 1.5$)
- Spare filter cartridge (2pcs.)
- Cleaning pin

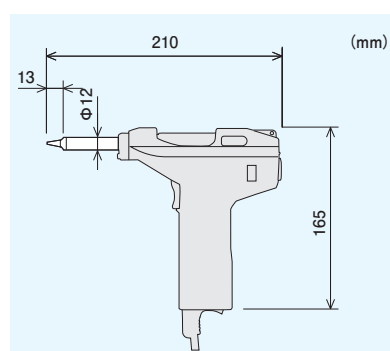**■SPECIFICATIONS**

POWER SOURCE	AC100V or 220-240V
PUMP	DIAPHRAGM TYPE
MOTOR OUTPUT	12W
VACUUM ATTAINED	650mmHg
TIME TO REACH MAX. VACUUM	0.2 seconds
AIR FLOW RATE (OPEN)	15 liter/min.
HEATER	100W(Ceramic)
CONTROL SYSTEM	Feed back zero cross over type
TEMPERATURE RANGE	350~500°C
TIP (HOLE DIA.)	1.0 ϕ (STANDARD)
POWER SUPPLY CORD	3P CORD (W GROUND) 1.8m
WEIGHT	420g(excluding cord)

■REPLACEMENT PARTS


Item No.	DESCRIPTION
SD-61	TIP $\phi 0.8$
SD-62	TIP $\phi 1.0$
SD-63	TIP $\phi 1.5$
SD-87	TAPERING SLIM TIP $\phi 0.8$
SD-88	TAPERING SLIM TIP $\phi 1.0$
SD-21	HEATER HOLDER
SD-22	HEATER ASSY
SD-23	PIPE SETTER
SD-24	FILTER CARTRIDGE (5pcs.)
SD-25	SEAT VALVE
SD-26	DIAPHRAGM

TOOL STAND

SD-60

SS-20**IRON STAND**


- Heat resistance engineering plastic on iron holder for cutting heat conduction to iron's grip
- Holds any soldering iron up to 13mm diam.
- 700g massive base stand creates high stability on bench.
- Dimensions: 80Wx140Hx90D (mm)




■ Ring detachable

SS-05**TIP CLEANER**


- Glass-filled nylon resin (Housing) featuring heat resistance of 130°C
- O-ring creates airtight condition to keep sponge moist.
- Comes with 2 pcs. of cleaning sponges of different density (Fine & Coarse)
- Easy to open the lid owing to sliding-lock structure
- Weight: 75g



■ O-ring in lid



■ Sliding lock

**SS-01·02****SOLDER SUCKER**

- All aluminum construction, well designed to suck up melted solder easily and efficiently with one-hand plunger action.
- Self-cleaning shaft allows high productivity of continual work without clogging.

SS-01

- Teflon tip : $\phi 2.2\text{mm}$ (Int.)
- Ideal for desoldering work at dense spot on PCB
- Body : $\phi 14 \times 170\text{mm}$

**SS-02**

- Silicone nozzle : $\phi 2\text{mm}$ (Int.) $\phi 4\text{mm}$ (Ext.)
- High-power and efficient absorption by means of elastic nozzle contact
- Low maintenance cost owing to spare tube only required for replacement
- 1 pce. of spare silicone tube (50mm long) originally included
- Body : $\phi 20 \times 153\text{mm}$



Heat resistant (350°C)
silicone nozzle

Compact and durable
aluminum body




Elastic and heat-resistant nozzle can stick to soldering iron on board closely and suck up solder powerfully with less residue.



Plunger is within easy reach of thumb. It is ideal for one-hand operation in continuous work.

Item No.	Cylinder Capa.	Wgt.
SS-01	5 ml	33g
SS-02	9 ml	52g

SS-11**REPLACEMENT NOZZLE FOR SS-01****SS-16****REPLACEMENT SILICONE TUBES**

- $\phi 2 \times 50\text{mm}$ 2 pcs./set
- Cut desired length of tube freely.
- Use only for SS-02

SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS

SWS-06~12 SUPERIOT RMA SOLDER

No cleaning high performance resin core solder, highest grade flux construction

- Completely non-corrosive flux residue which requires no cleaning after soldering
- Everlasting and reliable bonding owing to non-conductive and non-absorbable residue
- Wide solder spread and wetting for speedy work
- Contains organic amine activated rosin to meet highest JIS grade & MIL-RMA.



■ Superiot RMA / For use on precision PCB of copper and its alloy

Item No.	Tin/Lead Ratio, Melting point	Flux(Wt%)	Soluble resistance $\Omega \cdot \text{cm}$	Insulation resistance Ω	Wire diam. (mm)	Wire length. (m)
SWS-06	Sn60/Pb40 183~190°C	1.7% Noncleaning flux	1×10^5	3×10^{13} (Normal temp.) 5×10^{12} (Higher humidity)	0.6	5.6
SWS-08					0.8	4.4
SWS-10					1.0	5.5
SWS-12					1.2	4.6

SWA-06~12 SUPERIOT RA SOLDER

No cleaning high performance resin core solder for soldering stainless steel

- Non-corrosive flux residue featuring everlasting bonding
- Featuring stable bonding owing to non-conductive and non-absorbable residue
- Continuous and high performance activation makes it possible to solder stainless steel.
- Contains organic amine activated rosin to meet JIS standard.



■ Superiot RA / For use on stainless steel & nickel

Item No.	Tin/Lead Ratio, Melting point	Flux(Wt%)	Soluble resistance $\Omega \cdot \text{cm}$	Insulation resistance Ω	Wire diam. (mm)	Wire length. (m)
SWA-06	Sn60/Pb40 183~190°C	2.7% Noncleaning flux	6×10^4	2×10^{13} (Normal temp.) 2×10^{12} (Higher humidity)	0.6	5.6
SWA-08					0.8	4.4
SWA-10					1.0	5.5
SWA-12					1.2	4.6

SWS-56~82 SUPERIOT RMA SOLDER



SWS-58

SWS-80

Item No.	Wire diam. (mm)	Weight (g)
SWS-56	0.6	500
SWS-58	0.8	
SWS-60	1.0	
SWS-62	1.2	1000
SWS-76	0.6	
SWS-78	0.8	
SWS-80	1.0	
SWS-82	1.2	

SWA-56~82 SUPERIOT RA SOLDER



SWA-58

SWA-80

Item No.	Wire diam. (mm)	Weight (g)
SWA-56	0.6	500
SWA-58	0.8	
SWA-60	1.0	
SWA-62	1.2	1000
SWA-76	0.6	
SWA-78	0.8	
SWA-80	1.0	
SWA-82	1.2	

SWU-02~06

RoHS SOLDER WICK

- SODER-WICK® Highest copper braid features fast absorption of solder.
- No cleaning process required and leaving less residue of flux on circuit board



For desoldering highly dense SMD

SWU-02 1.5mm×1.5m



For desoldering small electronic parts or plated through hole

SWU-03 1.9mm×1.5m



For desoldering medium electronic parts or solder bridges

SWU-04 2.8mm×1.5m



For desoldering large-sized parts or terminals

SWU-05 3.9mm×1.5m



For use at large solder lugs

SWU-06 5.6mm×1.5m

※Product of chemtronics, U.S.A

SW-11~53**SOLDER**

- High quality solder wire for precision electronic components.
- No paste is necessary because of activated rosin.




Item No.	diam.(mm)	Weight(g)
SW-11	0.6	150
SW-12		500
SW-13		1000
SW-21	0.8	150
SW-22		500
SW-23		1000
SW-30	1.0	20
SW-31		150
SW-32		500
SW-33	1.2	1000
SW-41		150
SW-42		500
SW-43	1.6	1000
SW-51		150
SW-52		500
SW-53		1000

SD-10**DIGITAL MULTIMETER**

Multifunctional and compact : The ultimate tool for all your measurements!

- 3999 Counts, Auto-ranging
- Magnetic attachment to a metallic surface
- Gold-plated test leads for corrosion-resistance

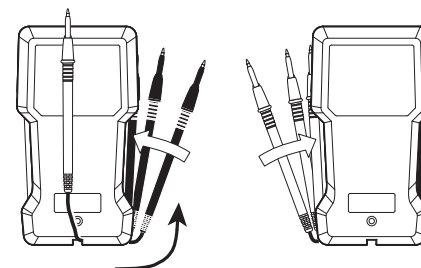

Test leads can be stored conveniently.



Operating principle	Dual integration
Display	LCD, 3999 Counts
Range switch	Auto range
Auto power off	Approx. 30 minutes (can be disabled)
Sampling	3 times / sec.
Operating temperature	0°C to 40°C less than 80% RH (without condensation)
Storage temperature	-10°C to 60°C less than 70% RH (without condensation)
Power	CR2032(3V) lithium battery x 1
Battery life	Approx. 120 hours
Dimensions and weight	70(W) x 127(H) x 12.5(D)mm Approx. 101g (incl. battery)
Lead length	Approx. 70cm
Standard	IEC61010-1 CAT II 600V, CAT III 300V
Accessories	Operation manual, Soft case

Function	Range	Resolution	Accuracy
DCV	4V	0.001V	±(1.0%+3dgt)
	40V	0.01V	
	400V	0.1V	
	600V	1V	
	4V	0.001V	
ACV	40V	0.01V	±(2.0%+5dgt)
	400V	0.1V	
	600V	1V	
	400Ω	0.1Ω	
	4kΩ	0.001kΩ	
Resistance	40kΩ	0.01kΩ	±(2.0%+5dgt)
	400kΩ	0.1kΩ	
	4MΩ	0.001MΩ	
	40MΩ	0.01MΩ	
	5Hz	0.001Hz	±(0.5%+5dgt)
Frequency	50Hz	0.01Hz	
	500Hz	0.1Hz	
	5kHz	0.001kHz	
	50kHz	0.01kHz	
Capacitance	100kHz	0.1kHz	±(5.0%+5dgt)
	50nF	0.01nF	
	500nF	0.1nF	
	5uF	0.001uF	
	50uF	0.01uF	
	100uF	0.1uF	

※Accuracy assurance of ACV・Frequency is limited to sine wave.

SL-50~53**POCKET LOUPE****SL-50**

- 10x/20mm diam.
- 83mm length
- 50mm (case)

**SL-51**

- 8x/25mm dia. & 15x/13mm dia.
- 150mm length
- 84mm (case)

**SL-52**

- Combination of 3x, 4x & 5x lens for max. 10x magnification
- 19mm diam. lens
- 83mm length
- 50mm (case)

**SL-53**

- Sharp and very distinct images with no color distortion
- Ideal for jewelry appraisal
- 18x/17mm diam.
- 63mm length
- 40mm (case)

**SL-55~57****INSPECTION LOUPE**

- Focus adjustment by sliding lens sleeve
- Built-in scale (detachable)

SL-55


- 10x
- 10mm diam. view
- Scale L

SL-56


- 15x
- 6mm diam. view
- Scale S

SL-57

- 22x
- 4mm diam. view
- Scale S

BUILT-IN SCALE

L: 0.2mm/scale




S: 0.1mm/scale

SL-12**INSPECTION LOUPE**

- Inspection loupe equipped with crosshairs
- Wide type light-through cylinder for bright and clear view

SL-12

- x10 Glass Lens
- Lens diameter : 30mm
- Crosshairs 0.1mm x 240
- Ext. Size : dia.38 x 50(H)
- with carrying pouch



0.1mm/scale

Item No.	SL-50	SL-51	SL-52	SL-53	SL-12	SL-55	SL-56	SL-57
Magnification	x10	x8 & x15	x3, 4 & 5	x18	x10	x10	x15	x22
Lens Material	Glass	Glass	White Glass	White Glass	White Glass	White Glass	White Glass	White Glass
Lens Structure	1+1	1+1	single	5-fold	1+1	1+1	1+1	1+1


※ 1+1 Structure : 1 pce. of eyepiece and 1 pce. of objective lens

※ 1+2 Structure : Achromatic Lens - combination of different refractive lens minimizes chromatic aberration.

※ 5-fold lens : superior to achromatic lens in aspect of no aberration and creates clearer image.

SL-64**FOLDABLE MAGNIFIER**

- x 3.5 Magnification acrylic lens
- Lens diameter: 40mm
- Foldable arm, flexible design
- Magnet attachment
- with carrying case



Self-standing for handsfree



Collapsible to fit carrying case

SL-72**UTILITY LOUPE**

- 3X 65mm diam. lens consists of aberration-free white lens.
- Versatile use with chrome-plated frame and wooden shaft.
- O.A. length: 175mm

**SL-32 · 33****LED POCKET LOUPE**

- Slide out the lens to turn on the light automatically.
- Battery CR2016 (2 pcs.)

SL-32

- 3.5X, ϕ 35mm Acrylic lens
- 79 x 44 x 12(H)mm

SL-33

- 3X, ϕ 45mm Acrylic lens
- 90 x 55 x 13(H)mm

SL-01 • 02 • 11

INSPECTION MIRROR

SL-01

- 35mm diam. angle-adjustable mirror
- O.A. length: 245mm



SL-11

- Anti-magnetic stainless steel (AISI304) frame ideal for work on electronic parts and devices
- 21 mm diam. adjustable all-angle ball joint magnifying mirror
- 2-sectioned telescopic rod (Min. 150 mm - Max. 215 mm)
- Compact body and thin head (frame) for inspection even at a narrow space



Magnified view

SL-02



- 35mm diam. adjustable all-angle ball joint mirror with pocket clip
- Telescopic rod extends from 192 to 540mm in length



SL-04 • 07

DESK-TOP LOUPE

SL-07

- x 2.5 ϕ 90mm lens
- 175mm Flexible shaft allows easy positioning

Discontinued

SL-04

- Magnifying power: 2.5x/75mm diam. lens.
- Ball joint permits free change of angles and positions.



SL-22

LED LIGHT LOUPE

- 2x/95mm diam. Acrylic lens with x4 bifocal lens built-in
- Long-life and bright LED (16 bulbs)
- DC power (AA battery x 4 pcs.)
※ Battery is not included.
- AC adapter (Input voltage 100-240V) included
- Magnet base stand for handsfree work
- 310mm Flexible arm for easy positioning
- Desk clamp (Max. opening 65mm. Depth 58mm)



LED (16bulbs)



SL-23



LED STAND LOUPE

 ϕ 22mm (x5) ϕ 105mm (x2)

Discontinued

- 2x/105mm diam. Acrylic lens with x5 bifocal lens built-in
- Illuminated by 2 LED's, ideal for inspection and hobby use
- DC power (AA battery x 3 pcs.)
※ Battery is not included.
- 300mm Flexible arm for easy positioning




SL-71



LED FLASHLIGHT LOUPE

- LED light illuminates a magnified area.
- 10X, 30mm diam.
- Twin-lens structure (Glass lens + plastic lens)
- 2 x C-cell battery
- O.A. length: 177mm



Built-in 20mm scale

SL-36



LED FLASHLIGHT LOUPE

- 5X, 50mm diam. Glass lenses (2 pcs.)
- Built-in 25mm scale, 30mm x 30mm wide field of view
- 2 x C-cell battery
- O.A. length: 190mm




Intake of natural light for bright view

SL-80~83/85~88

HEAD LOUPE

- Suitable for inspection/repair of electronic and precise instruments
- Well-fitted head band with velcro tape
- Usable even while wearing glasses.



Head loupe

Item No.	Magnification
SL-80	1.8
SL-81	2.3
SL-82	2.7
SL-83	3.5

Replacement lens

Item No.	Magnification
SL-85	1.8
SL-86	2.3
SL-87	2.7
SL-88	3.5

● The size of all the replacement lens is common and suitable for any head loupes.

SCREW REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING STRIPPERS

TWEEZERS

SCREW DRIVERS

SPECIAL DRIVERS

WRENCHES

CUTTING PROCESSING

SETS CASES

SOLDERING EQUIPMENT



ESD CHEMICALS

ESD Products and Chemicals



ZC-01~03**CONDUCTIVE FOAM**

- Conductive urethane foam with high density in 10mm thickness.
- Protects CMOS IC and other static-sensitive components during storage, in transit and in hand.
- Material: Polyethylene

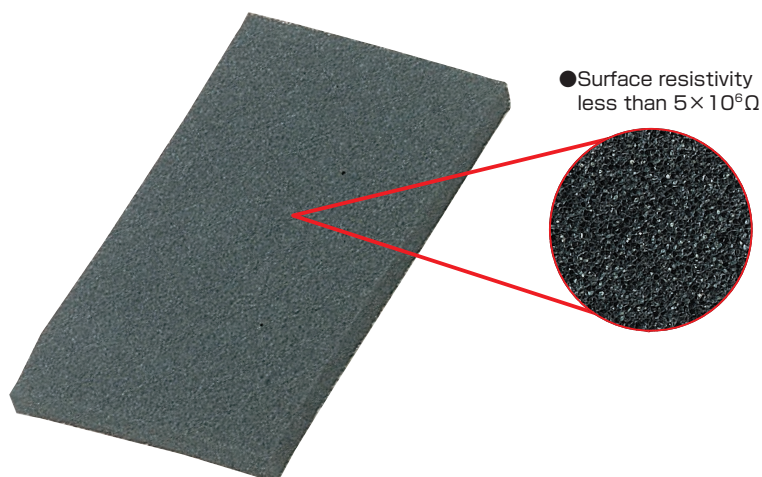



Item No.	Size(mm)
ZC-01	075×130×10
ZC-02	100×290×10
ZC-03	250×300×10

ZC-50**WRIST STRAP**

- Conveniently-designed earth cord to improve precise work efficiently
- Curving-shaped & wide plastic body (30x20mm) featuring higher conductivity around wrist
- Silver filaments in elastic band ideal for high conductivity & anti-metallic allergy

**Applications**

Assembly or repair of electronics and precise instrument for anti-static electricity

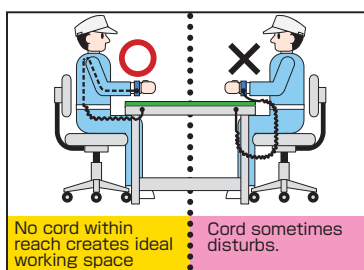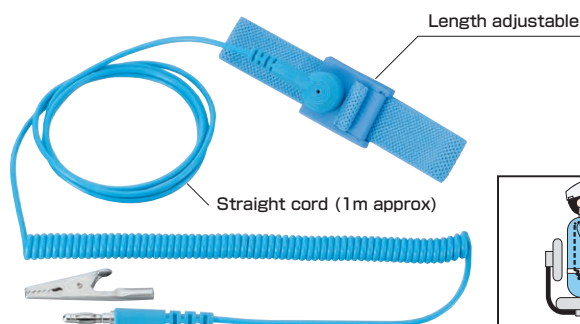
**Specifications :**

- Adjustable type wrist band
- Built-in 1MΩ resistor for safety
- Alligator clip included
- Polyester elastic band woven with silver filaments

If anyone who is charged with static electricity through clothes touches IC's and electronic components, he discharges electricity through his fingers and gives a damage to IC's and electronic components. Wrist Strap can eliminate static electricity through his wrist to prevent them from being damaged.

ZC-80**ANTI-STATIC SERVICE KIT**

- Mat size : 900×600mm (Thickness 0.7mm)
- Contents : Wrist strap with cord (1MΩ)
Spare earth cord (1MΩ)
Zippered carrying case (270×200mm)

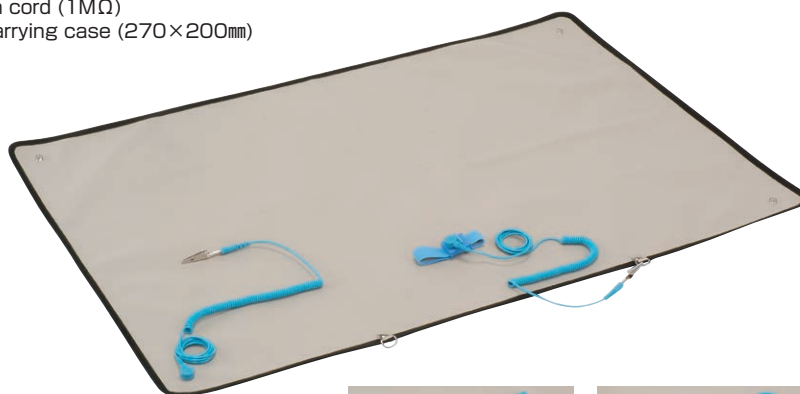


Rayon backing with stud


Layer	Color	Material	Thickness	Surface Resistivity
Top	Beige	PVC	0.35mm	$7.3 \times 10^9 \Omega$
Bottom	Gray	Rayon	0.3mm	$1.5 \times 10^9 \Omega$



Earth cord



Wrist strap



ZC-44~49 STATIC CONDUCTIVE GLOVES

- Surface resistivity : $10^5 \sim 10^6 \Omega$ sq.(Finger) $10^7 \Omega$ sq.(Palm)
- Ideal for clean room, assembly of electronic devices, handling of plastic products, etc.
- Copper sulfide mixed with acryl/nylon creates an excellent conductive effect (Finger Part)
- Seamless and dust-free mono-filament
- Chemical dyeing of conductive element features less reduction of conductivity withstanding repeated washing
- Material : Fabric - Nylon 90% Acryl 10%
: Coating - Polyurethane Resin



■Fingertip Coating (mm)

Item No.	Size
ZC-44	S
ZC-45	M
ZC-46	L

■Palm Coating (mm)

Item No.	Size
ZC-47	S
ZC-48	M
ZC-49	L

ZC-51~56 ANTI-STATIC GLOVES

- Surface resistivity : $10^6 \sim 10^9 \Omega$ sq.
- Ideal for any work in the facility where anti-static should be controlled
- Seamless and dust-free mono-filament
- Washable with ordinary detergent
- Material : Fabric - Nylon 75% Acryl 25%
: Coating - Polyurethane Resin



■Fingertip Coating (mm)


Item No.	Size
ZC-51	S
ZC-52	M
ZC-53	L

■Palm Coating (mm)

Item No.	Size
ZC-54	S
ZC-55	M
ZC-56	L

ZC-38~43 DUST-FREE GLOVES

- Flexible & comfortable gloves made of elastic and breathable nylon fiber
- Ideal for use in clean room and handling of C.R.T., electric bulb, compact disc, glass, etc.
- Seamless and dust-free mono-filament
- Non-slip coating for accurate assembly work
- Washable with ordinary detergent
- Material : Fabric - Wooly Nylon
: Coating - Polyurethane Resin




■Fingertip Coating (mm)

Item No.	Size
ZC-38	S
ZC-39	M
ZC-40	L

■Palm Coating (mm)

Item No.	Size
ZC-41	S
ZC-42	M
ZC-43	L

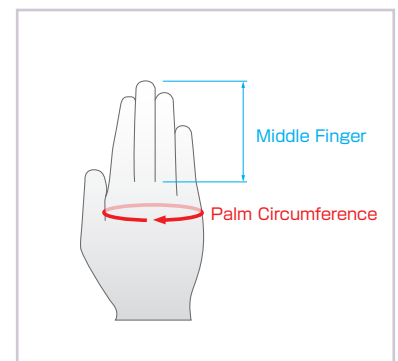


Size of Gloves (mm)

Size	S	M	L
Palm Circumference	155~160	175~185	185~195
Middle Finger (Length)	67~72	70~77	75~80

ZC-82·84·86 STATIC CONDUCTIVE BAG


- Surface resistivity : $5 \times 10^3 \Omega$ or less
- Color : Black
- Thickness : 0.05mm
- Material : Polyethylene (Carbon contained)

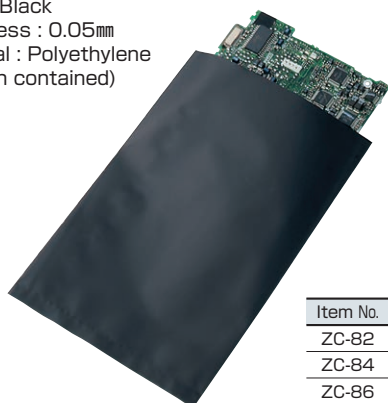

Item No.	Size(mm)	Package
ZC-82	100×150	100pcs.
ZC-84	200×300	100pcs.
ZC-86	300×450	100pcs.

ZC-92·94·96 ANTI-STATIC BAG

- Surface resistivity : $5 \times 10^{10} \Omega$ or less
- Color : Blue Transparent
- Thickness : 0.05mm
- Material : Polyethylene

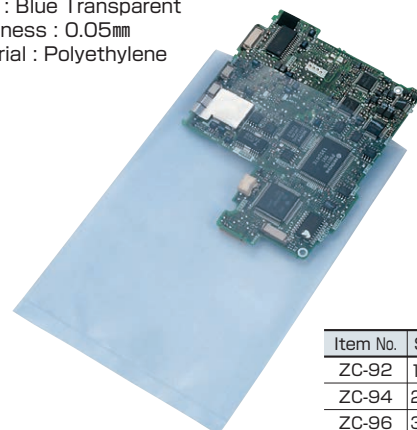



Item No.	Size(mm)	Package
ZC-92	100×150	100pcs.
ZC-94	200×300	100pcs.
ZC-96	300×450	100pcs.

ZCM-01~06**CONDUCTIVE COLORED MAT**


- Static-Dissipative mat maintains an ESD-Safe working surface.
- Anti-Fatigue rubber material that provides cushioning comfort.
- Available in pre-cut mats or rolls.
- A4 size (ZCM-05) and A3 size (ZCM-06) are also available, ideal for use on a workbench. Comes with 10mm stud for earthing (ZCM-05/06 only).

**Usage**

Put ZC-62 on the reverse of the mat for grounding.
Use ZC-63 in connection of mat.

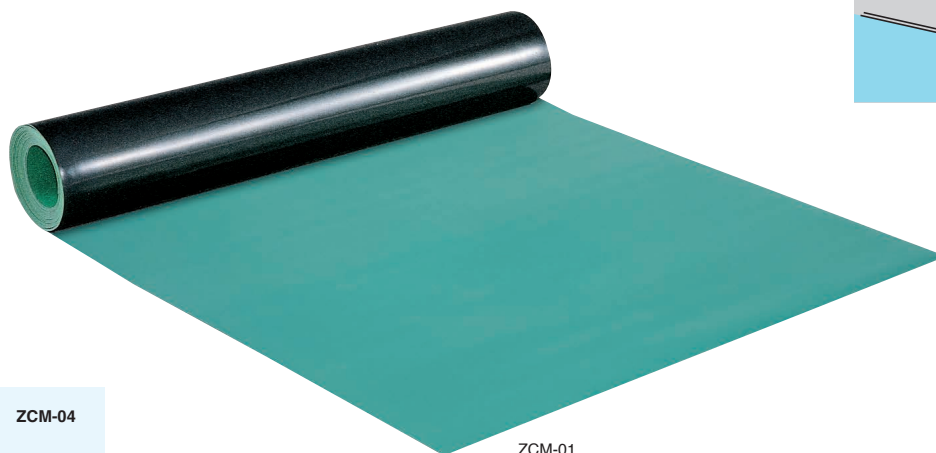

ZCM-01



- Surface resistivity
Top Layer (Green) : $10^8 \sim 10^{10} \Omega$
Bottom Layer (Black) : $10^3 \sim 10^5 \Omega$

Item No.	Size
ZCM-01	1m×10m×2mm
ZCM-02	1m×2m×2mm
ZCM-03	1m×1m×2mm
ZCM-04	1m×0.5m×2mm
ZCM-05	230×330×2mm
ZCM-06	320×450×2mm

ZC-62**GROUND CORD**


- For ZCM-01~04
- Size : Cord.....2m Plate...15cm×2cm

**ZCM-10****EARTH CORD**

- For ZCM-05/06
- Banana plug with an alligator clip
- Built-in 1MΩ resistor for safety
- Length : 0.65~1.8m practicable

**ZC-63****CONNECTIVE PLATE**

- For ZCM-01~04
- Contents : 10pcs.
- Size : 15cm×2cm

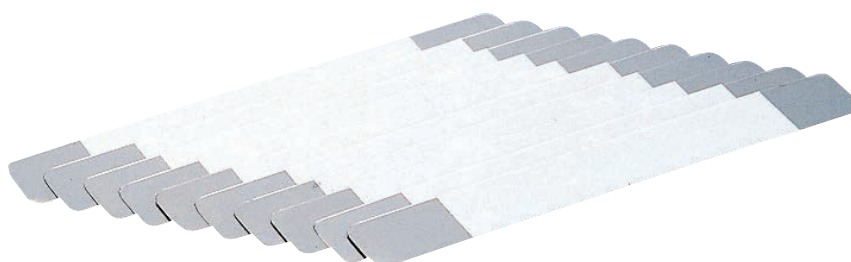SCREW
REMOVAL

SCISSORS

NIPPERS

PLIERS

CRIMPING
STRIPPING

TWEEZERS

SCREW
DRIVERSSPECIAL
DRIVERS

WRENCHES

CUTTING
PROCESSINGSETS
CASESSOLDERING
EQUIPMENTESD
CHEMICALS


ZC-28・28M・29**RoHS RUST REMOVER****Amazing - How quickly it cleans rust off!**

- Since it is a neutral liquid, you can work safely (it does not contain acid or alkali).
- Rust on small components, such as rusted screws, can be removed in seconds without scrubbing.
- In case of heavy rust, rub it down with a wire brush and/or a paper file before using the remover.
- Works with Red, Brown and Yellow colored rust on iron, copper, stainless steel, brass, etc.



SAFE: Neutral liquid
Less harmful to bare skin
(unlike acid or alkali)

PRODUCT VIDEO

**How it works on rusty screws****1. Penetration**

The liquid penetrates through small gaps and reaches the screw's thread in seconds!

**2. Rapid Action**

It instantly reacts on the rust and turns purple!

**3. Screw Removal**

Utilize Screw Removal Pliers to loosen the treated screw with sure-gripping jaws.




Liquid



Mist



Foam Spray

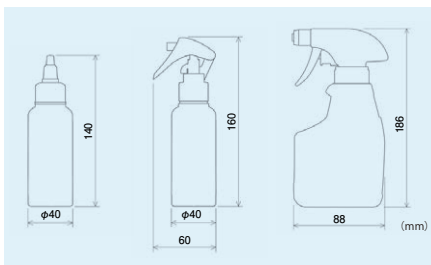

Item No.	Type	Bottle size	Contents
ZC-28	Liquid	φ40 x H140mm	100g
ZC-28M	Mist	φ40 x H160mm	100g
ZC-29	Foam Spray	W88x H186mm	250g

※ Rusted parts may have lower intensity due to reduced wall thickness or corrosion even after removing the rust.
Do not reuse those mechanical parts such as springs, chains and bolts, to which strong force will be applied.

ZC-19**RoHS OILER**

- Compact-sized and handy oiler
- Nozzle extendable (60mm-long approx.) for oiling at hard-to-reach area
- Capacity: 200ml
- Material: PE (Bottle/Cap), Brass (Nozzle)
- Usage: Oil, Water, Cleaning fluid, etc.

How to use


- ① Extend nozzle upward.
 - ② Unscrew plastic cap.
 - ③ Remove packing inside.
 - ④ Pour oil in bottle.
 - ⑤ Fasten the packing and the cap with nozzle in order.
- ※ Keep the bottle upright in storage.



Machinery maintenance



Lubrication



Item No.	49898330-	Item	Page
DA-01	10010	Alignment Screwdriver	49
DA-02	10027	Alignment Screwdriver	49
DA-03	Discon.	Alignment Screwdriver	
DA-40	10409	Alignment Screwdriver	49
DA-48	10485	Ceramic Alignment Screwdriver	48
DA-50	10508	Ceramic Alignment Screwdriver	48
DA-51	10515	Ceramic Alignment Screwdriver	48
DA-52	10522	Ceramic Alignment Screwdriver	48
DA-53	Discon.	Ceramic Alignment Screwdriver	
DA-54	Discon.	Ceramic Alignment Screwdriver	
DA-55	Discon.	Ceramic Alignment Screwdriver	
DA-56	Discon.	Ceramic Alignment Screwdriver	
DA-57	Discon.	Ceramic Alignment Screwdriver	
DA-58	Discon.	Ceramic Alignment Screwdriver	
DA-59	Discon.	Ceramic Alignment Screwdriver	
DA-72	10720	Ceramic Alignment Screwdriver	48
DA-73	10737	Ceramic Alignment Screwdriver	48
DA-74	10744	Ceramic Alignment Screwdriver	48
DA-75	10751	Ceramic Alignment Screwdriver	48
DA-76	10768	Ceramic Alignment Screwdriver	48
DA-77	10775	Ceramic Alignment Screwdriver	48
DA-78	10782	Ceramic Alignment Screwdriver	48
DA-79	10799	Ceramic Alignment Screwdriver	48
DA-81	10812	Ceramic Alignment Screwdriver	49
DA-82	10829	Ceramic Alignment Screwdriver	49
DA-83	10836	Ceramic Alignment Screwdriver	49
DA-84	10843	Ceramic Alignment Screwdriver	49
DA-85	10850	Ceramic Alignment Screwdriver	49
DA-86	10867	Ceramic Alignment Screwdriver	49
DA-87	10874	Ceramic Alignment Screwdriver	49
DA-88	10881	Ceramic Alignment Screwdriver	49
DAP-01	06013	Pentalobe Driver	43
DAT-02	06020	Hex-Lobe Driver	43
DB-15	13158	Ball Point Driver	45
DB-20	13202	Ball Point Driver	45
DB-25	13257	Ball Point Driver	45
DB-30	13301	Ball Point Driver	45
DB-40	13400	Ball Point Driver	45
DB-50	Discon.	Ball Point Driver	
DBZ-20	14421	Socket screw extractor set	9
DBZ-50B	14483	Handle Grip for DBZ	8
DBZ-51	14513	Replacement Bit for DBZ-60G	9
DBZ-52	14520	Replacement Bit for DBZ-60G	9
DBZ-53	14537	Optional Bit for DBZ-60G	9
DBZ-54	14650	Optional Bit for DBZ-60G	9
DBZ-56	14667	Optional Bit for DBZ-60G	9
DBZ-57	14674	Optional Bit for DBZ-60G	9
DBZ-58	14681	Optional Bit for DBZ-60G	9
DBZ-60G	14629	Rapid Screw Extractor	8
DBZ-62	14711	Optional Bit for DBZ-60G	9
DBZ-63	14728	Optional Bit for DBZ-60G	9
DBZ-64	14735	Optional Bit for DBZ-60G	9
DBZ-65	14742	Optional Bit for DBZ-60G	9
DG-01	11017	Pro Grip Driver	38
DG-02	11024	Pro Grip Driver	38
DG-03	11031	Pro Grip Driver	38
DG-04	11048	Pro Grip Driver	38
DG-05	11055	Cushion Driver	38
DG-08	Discon.	Master Grip Driver	
DG-09	11093	Master Grip Driver	38
DG-11	11116	Extra Long Grip Driver	38
DG-12	11123	Extra Long Grip Driver	38
DG-13	11130	Extra Long Grip Driver	38
DG-14	11147	Extra Long Grip Driver	38
DG-21	11215	Mini Soft Driver	39
DG-22	11222	Mini Soft Driver	39
DG-23	11239	Mini Soft Driver	39
DG-24	11246	Mini Soft Driver	39
DH-15	15152	Hex Driver	46
DH-20	15206	Hex Driver	46
DH-25	15251	Hex Driver	46
DH-30	15305	Hex Driver	46
DH-40	15404	Hex Driver	46
DH-50	15503	Hex Driver	46
DH-60	Discon.	Hex Driver	

Item No.	49898330-	Item	Page
DJ-01	Discon.	Plug Jack Driver	
DJ-02	Discon.	Plug Jack Driver	
DJ-03	17637	Plug Jack Driver	44
DJ-04	17644	Plug Jack Driver	44
DJ-05	Discon.	Plug Jack Driver	
DK-01	16012	Hex Driver Set	46
DK-02	16029	Hex Driver Set	46
DK-03	16036	Ball Point Driver Set	45
DK-04	Discon.	Nut Driver Set	
DK-05	16050	Interchangeable Driver Set	47
DK-05P		Interchangeable Driver Set	47
DK-06	16067	Interchangeable Driver Set	47
DK-06P		Interchangeable Driver Set	47
DK-07	Discon.	Interchangeable Driver Set	
DK-08	16081	Interchangeable Driver Set	47
DK-10	Discon.	⊕Precision Driver Set	
DK-13	16135	Reversible Precision Dr. Set	45
DK-14	16142	Nut Driver Set	46
DK-16	16166	Mini Soft Driver Set	39
DK-20	Discon.	⊕Precision Driver Set	
DK-21	Discon.	Precision Driver	
DK-22	Discon.	Precision Driver	
DK-23	Discon.	Precision Driver	
DK-24	Discon.	Precision Driver	
DK-25	Discon.	Precision Driver	
DK-26	Discon.	Precision Driver	
DK-30	Discon.	⊕Precision Driver Set	
DK-31	Discon.	Precision Driver	
DK-32	Discon.	Precision Driver	
DK-33	Discon.	Precision Driver	
DK-34	Discon.	Precision Driver	
DK-35	Discon.	Precision Driver	
DK-36	Discon.	Precision Driver	
DK-50	16500	Reversible Driver Set	39
DK-51	16517	Reversible Driver	39
DK-52	16524	Reversible Driver	39
DK-53	16531	Reversible Driver	39
DK-60	Discon.	⊕Precision Driver Set	
DK-80	Discon.	Computer Driver Set	
DK-81	Discon.	Mobile Phone Driver Set	
DK-82	Discon.	Mobile Phone Driver Set	
DK-90	16906	Ceramic Alignment Driver Set	48
DK-91	16913	Ceramic Alignment Driver Set	49
DKD-01	17811	Circuit Testing Driver	45
DKD-02	Discon.	Circuit Testing Driver	
DKD-03	17835	LED Circuit Tester	45
DM-20	11802	⊕Precision Driver Set	47
DM-21	11819	⊕Precision Driver	47
DM-22	11826	⊕Precision Driver	47
DM-23	11833	⊕Precision Driver	47
DM-24	11840	⊕Precision Driver	47
DM-25	11857	⊕Precision Driver	47
DM-26	11864	⊕Precision Driver	47
DM-30	11901	⊕Precision Driver Set	47
DM-31	11918	⊕Precision Driver	47
DM-32	11925	⊕Precision Driver	47
DM-33	11932	⊕Precision Driver	47
DM-34	11949	⊕Precision Driver	47
DM-35	11956	⊕Precision Driver	47
DM-36	11963	⊕Precision Driver	47
DM-60	12007	⊕Precision Driver Set	47
DN-01	17019	Nut Driver	44
DN-02	17026	Nut Driver	44
DN-03	17033	Nut Driver	44
DN-04	17040	Nut Driver	44
DN-05	17057	Nut Driver	44
DN-06	17064	Nut Driver	44
DN-07	17071	Nut Driver	44
DN-08	17088	Nut Driver	44
DN-09	17095	Nut Driver	44
DN-10	17101	Nut Driver	44
DN-12	17125	Nut Driver	44
DNC-55T	04569	Nut Catching Driver	44
DNC-57T	04712	Nut Catching Driver	44
DNC-65T	04668	Nut Catching Driver	44

Item No.	49898330-	Item	Page
DNP-05	Discon.	Pro Nut Driver	
DNP-07	Discon.	Pro Nut Driver	
DNP-08	Discon.	Pro Nut Driver	
DNP-10	Discon.	Pro Nut Driver	
DP-03	18030	Pro-Use Driver®	38
DP-13	18139	Pro-Use Driver®	38
DP-24	18245	Pro-Use Driver®	38
DP-34	18344	Pro-Use Driver®	38
DP-44	18443	Pro-Use Driver®	38
DP-54	18542	Pro-Use Driver®	38
DP-64	18641	Pro-Use Driver®	38
DR-03	12038	Ratchet Stubby Driver	40
DR-04	12045	Ratchet Stubby Driver Set	40
DR-05	12052	Offset Ratchet Driver	41
DR-06	12069	Offset Ratchet Driver with Bit Set	41
DR-07	12076	Twin Wrench Driver Set	40
DR-08	Discon.	Ratchet Stubby Driver Set(Flex.)	
DR-10	12106	Bit Set	41
DR-11	12113	Bit Set	41
DR-14	Discon.	Bit Set	
DR-15	12151	Bit Set	41
DR-16	12168	Bit Set	41
DR-17	12175	Bit Set	41
DR-18	12182	Bit Set for Mobile Phone	43
DR-50	12502	Twin Wrench Driver Set	43
DR-51	12519	Master Grip Driver for Hex-Lobe Screw	44
DR-52	12526	Master Grip Driver	40
DR-53	Discon.	Cushioned Grip Ratchet Driver	
DR-54	12540	Stubby Ratchet Palm Driver	39
DR-55	12557	Mini Offset Ratchet	41
DR-56	Discon.	7-in-1 Angled Ratchet	
DS-03	19037	Standard Driver®	38
DS-12	19129	Standard Driver®	38
DS-13	19136	Standard Driver®	38
DS-14	19143	Standard Driver®	38
DS-16	Discon.	Standard Driver®	
DS-23	19235	Standard Driver®	38
DS-24	19242	Standard Driver®	38
DS-33	19334	Standard Driver®	38
DS-34	19341	Standard Driver®	38
DS-44	19440	Standard Driver®	38
DS-46	19464	Standard Driver®	38
DS-54	19549	Standard Driver®	38
DS-64	19648	Standard Driver®	38
DS-76	Discon.	Standard Driver®	
DS-85	Discon.	Standard Driver®	
DST-01	15817	Stubby Driver	39
DST-02	15824	Stubby Driver	39
DST-05	15855	Combination Reversible Stubby Driver	39
DST-06	15862	Miniature Reversible Driver	39
DST-07	15879	Miniature Reversible Driver	39
DT-02	05023	Mobile Phone Driver	43
DT-04	05047	Mobile Phone Driver	43
DT-05	05054	Mobile Phone Driver	43
DT-06	05061	Mobile Phone Driver	43
DT-08	05481	Mobile Phone Driver	43
DT-10	05108	Mobile Phone Driver	43
DT-15	05153	Mobile Phone Driver	43
DT-20	05207	Mobile Phone Driver	43
DTC-20	05702	Mobile Phone Driver	43
DTC-27	05771	Mobile Phone Driver	43
DTH-03	Discon.	Mobile Phone Driver	
DTP-03	05436	Pentalobe Driver	43
DTP-05	05450	Pentalobe Driver	43
DTX-04	05443	Mobile Phone Driver	43
DTX-08	05085	Mobile Phone Driver	43
DTY-02	05825	Mobile Phone Driver	43
DTY-03	05832	Mobile Phone Driver	43
DZ-01	09014	Miniature Driver	39
DZ-02	09021	Miniature Driver	39
DZ-03	Discon.	Cross Nut Driver	
DZ-04	Discon.	Cross Nut Driver	
DZ-05	Discon.	Cross Nut Driver Set	
DZ-06	Discon.	Offset Driver	
DZ-07	Discon.	Offset Driver	

Item No.	49898330-	Item	Page
DZ-08	Discon.	Offset Driver Set	
DZ-11	Discon.	Flexible Shaft Driver	
DZ-12	Discon.	Flexible Shaft Driver	
DZ-21	Discon.	Screw Holding Driver	
DZ-23	Discon.	Screw Holding Driver	
DZ-24	Discon.	Screw Holding Driver	
DZ-25	Discon.	Screw Holding Driver	
DZ-70	09700	Go-through Driver Grip	40
DZ-71	09717	Go-through Driver #2 extractor	40

Item No.	49898330-	Item	Page
KA-15	71158	ABS Attache Case	66
KA-22	71226	Attache Case (Wide Type)	65
KA-30	71301	Aluminium Case	67
KA-42	71424	Aluminium Case	67
KA-43	71431	Aluminium Case	67
KA-44	71448	Aluminium Case	67
KA-50	71509	Aluminium Case	66
KA-51	71516	Aluminium Case	66
KA-54	71547	Aluminium Attache Case	67
KA-57	71578	Aluminium Case	66
KA-91	Discon.	Aluminium Case	
KAC-30	72308	Aluminium Case for Clean Room	67
KAC-42	72421	Aluminium Case for Clean Room	67
KD-01	Discon.	Panel Kits for Field Maintenance	
KD-02	Discon.	Panel Kits for Field Maintenance	
KD-03	Discon.	Panel Kits for Field Maintenance	
KD-04	Discon.	Panel Kits for Electronics Work	
KD-05	Discon.	Panel Kits for Electronics Work	
KD-06	Discon.	Panel Kits for Electronics Work	
KDE-01	Discon.	Panel	
KDE-02	Discon.	Panel	
KDE-03	Discon.	Panel	
KDE-04	Discon.	Panel	
KDE-05	Discon.	Panel	
KDE-06	Discon.	Panel	
KP-01	Discon.	Parts Box	
KP-02	74029	Parts Box	68
KP-02K	74081	Parts Box (Heavy-Duty Type)	68
KP-03	74036	Parts Box	68
KP-03K	74098	Parts Box (Heavy-Duty Type)	68
KP-04	74043	Miniature Box	68
KP-51	74517	IC Storage Box	68
KP-52	74524	IC Storage Box	68
KP-95	Discon.	Dividing Plate	
KP-96	74968	Dividing Plate	68
KP-97	74975	Dividing Plate	68
KS-01	70014	My Kit	60
KS-02	70021	My Kit	60
KS-03	70038	Tool Kit	62
KS-04	70045	Tool Kit	62
KS-05	70052	Maintenance Kit	61
KS-06	70069	Maintenance Kit	61
KS-06R	Discon.	Maintenance Kit	
KS-08	70380	Electronics Kit	62
KS-09	Discon.	Tool Kit	
KS-10	Discon.	Tool Kit	
KS-11	70113	Tool Kit	64
KS-12	70120	Attache Tool Kit	64
KS-14	70144	Electronics Kit	63
KS-17	Discon.	Tool Kit	
KS-18	Discon.	Tool Kit	
KS-20	70205	My Kit	60
KS-27	70274	My Kit	60
KS-28	70281	Tool Kit	63
KS-30	Discon.	Attache Tool Kit	
KS-31	Discon.	Attache Tool Kit	
KS-34	70342	Screw Removal Bundle Kit	7
KSC-04	75040	Tool Kit	62
KSC-05	75057	Maintenance Kit	61
KSC-06	75064	Maintenance Kit	61
KSE-03	Discon.	Tool Case	
KSE-04	70540	Tool Case	62
KSE-06	70564	Tool Case	61
KSE-09	Discon.	Tool Case with Panel	
KSE-10	Discon.	Tool Case with Panel	

Item No.	49898330-	Item	Page
KSE-11	70618	Tool Case with Panel	64
KSE-12	70625	Attache Case with Empty Panel	65
KSE-17	Discon.	Tool Case with Empty Panel	
KSE-18	Discon.	Tool Case with Empty Panel	
KSE-28	70786	Eva Tool Case with Panel	63
KSE-30	Discon.	Attache Case with Empty Panel	
KSE-31	Discon.	Attache Case with Empty Panel	

NK-15	31152	Diagonal Nippers	18
NK-16	31169	Diagonal Nippers	18
NK-25	31251	Diagonal Nippers	18
NK-26	31268	Diagonal Nippers	18
NK-36	31367	Heavy Duty Diagonal Nippers	18
NN-45	31459	Slant Edge Nippers	19
NN-46	31466	Slant Edge Nippers	19
NN-56	31565	Slant Edge Nippers	19
NP-03	30834	Plastic Nippers	19
NP-04	30841	Plastic Nippers	19
NP-05	30858	Plastic Nippers	19
NS-03	30032	Micro Nippers	16
NS-04	30049	Micro Nippers	16
NS-06	30063	Micro Nippers	16
NSX-04	30018	Micro Nippers	16
NZ-03	30933	Chip Cutter	17
NZ-05	30957	Chip Cutter	17
NZ-12G	31008	Micro Cutter	17
NZ-13G	31015	Micro Cutter	17

PA-01	Discon.	Wire Pliers	
PA-02	Discon.	Wire Pliers	
PA-03	Discon.	Wire Pliers	
PA-04	Discon.	Wire Pliers	
PA-05	Discon.	Wire Stripper	
PA-06	35068	Wire Stripper	31
PA-07	35075	Wire Stripper	31
PA-08	Discon.	Connector Pliers	
PA-09	35096	Micro Connector Pliers	26
PA-11	Discon.	Wire Stripper	
PA-12	Discon.	Wire Stripper	
PA-13	Discon.	Wire Stripper	
PA-14	35143	Wire Stripper	31
PA-15	Discon.	Connector Pliers	
PA-20	35204	Universal Crimping Pliers	26
PA-21	35211	Universal Crimping Pliers	26
PA-24	35242	Micro Connector Pliers	25
PA-30	35303	Wire Stripper	28
PA-90	35907	Strip Gauge	31
PA-91	35914	Terminal Set	28
PA-92	35921	Terminal Set	28
PA-93	Discon.	Terminal Set	
PAD-01	Discon.	Handy Crimp Tool Complete Set	
PAD-02	35396	Handy Crimp Tool Complete Set	28
PAD-10		Handy Crimp Tool Frame	27
PAD-11	35327	Handy Crimp Tool (S)	27
PAD-11S	35358	Interchangeable Die Set (S)	27
PAD-12	35334	Handy Crimp Tool (M)	27
PAD-12S	35365	Interchangeable Die Set (M)	27
PAD-13	35341	Handy Crimp Tool (L)	27
PAD-13S	35372	Interchangeable Die Set (L)	27
PAR-20	Discon.	Ratchet Crimping Connector Pliers	
PAS-30	35709	Connector Extractor	29
PAS-31	35716	Connector Extractor	29
PAS-32	35723	Connector Extractor	29
PAS-33	35730	Connector Extractor	29
PAS-34	35747	Connector Extractor	29
PAW-21	34818	Compact Stripper	28
PAW-32	34856	Wire Stripper	28
PC-05	33859	Combination Pliers (ex-PC06)	23
PC-07	33873	Combination Pliers (ex-PC08)	23
PD-06	33767	Side Cutting Pliers	22
PD-07	33774	Side Cutting Pliers	22
PD-08	33781	Side Cutting Pliers	22
PDS-01	35440	Screw Removal Tool Kit	7
PGT-03	35433	GT Pack (Paulownia Box)	7
PH-01	34016	Lock Holder	30

Item No.	49898330-	Item	Page
PH-02	34023	Lock Holder	30
PH-03	34030	Lock Holder	30
PH-04	34047	Lock Holder	30
PH-05	Discon.	Lock Holder	
PH-06	Discon.	Lock Holder	
PH-31	Discon.	Electronic Snips	
PH-32	Discon.	Electronic Snips	
PH-33	34337	Electronic Snips	14
PH-34	34344	Electronic Snips	14
PH-50	34504	Combination Scissors	13
PH-51	Discon.	Combination Scissors	
PH-55	34559	Combination Scissors GT	13
PH-56G	34566	Combination Scissors MP	12
PH-56R	34610	Combination Scissors MP	12
PH-56Y	34627	Combination Scissors MP	12
PH-57	34573	Combination Scissors DP	11
PH-57G	Discon.	Combination Scissors DP	
PH-57R	Discon.	Combination Scissors DP	
PH-57Y	Discon.	Combination Scissors DP	
PK-50	35501	Cable Shears	14
PK-51	35518	Cable Shears	14
PL-05	33552	Long Flat Nose Pliers	22
PL-06	33569	Long Flat Nose Pliers	22
PM-06	33668	Round Nose Pliers	22
PR-15	33156	Long Nose Pliers	22
PR-16	33163	Long Nose Pliers	22
PR-26	33262	Long Nose Pliers	22
PR-36	33361	Long Nose Pliers	22
PR-46	33460	Needle Nose Pliers	22
PS-01	32012	Miniature Long Nose Pliers	21
PS-03	32036	Miniature Needle Nose Pliers	21
PS-04	32043	Miniature Flat Nose Pliers	21
PSS-01	Discon.	S/S Long Nose Pliers	
PSS-02	Discon.	S/S Needle Nose Pliers	
PSS-04	Discon.	S/S Flat Nose Pliers(Curved)	
PT-01	36010	Tweezers(AA)	33
PT-02	36027	Tweezers(RR)	33
PT-03	36034	Tweezers(MM)	33
PT-04	36041	Tweezers(I)	33
PT-05	36058	Tweezers(GG)	33
PT-06	36065	Tweezers(J)	33
PT-07	36072	Tweezers(TS)	33
PT-08	36089	Tweezers	33
PT-09	36096	Tweezers	33
PT-10	36102	Tweezers	33
PT-11	36119	Tweezers	33
PT-12	36126	Tweezers(BS)	34
PT-13	36133	Tweezers	34
PT-14	36140	Reverse Action Tweezers	34
PT-15	36157	Tweezers	34
PT-16	36164	Solid Arm Tweezers	34
PT-17	36171	Solid Arm Tweezers	34
PT-19	Discon.	SMD Tweezers	
PT-20	Discon.	SMD Tweezers	
PT-21	Discon.	SMD Tweezers	
PT-22	Discon.	SMD Tweezers	
PT-23	Discon.	SMD Tweezers	
PT-24	Discon.	SMD Tweezers	
PT-25	Discon.	SMD Tweezers	
PT-26	Discon.	SMD Tweezers	
PT-28	Discon.	SMD Tweezers	
PT-31	36294	Solid Arm Tweezers	34
PTK-90	36904	Tweezers' Soft Case	34
PTN-01	36614	Titanium Tweezers(AA)	34
PTN-02	36621	Titanium Tweezers(GG)	34
PTN-03	36539	Titanium Tweezers(J)	34
PTN-04	Discon.	Titanium Tweezers(TS)	
PTS-01	36713	Tweezers	36
PTS-02	36720	Tweezers	36
PTS-03	36737	Tweezers	36
PTS-04	36744	Tweezers	36
PTS-05	36751	Tweezers	36
PTS-06	36768	Tweezers	36
PTS-07	36775	Tweezers	36
PTS-08	36782	Tweezers	36

Item No.	49898330-	Item	Page
PTZ-41	36935	ESD Plastic-Tipped Tweezers	35
PTZ-42	36942	ESD Plastic-Tipped Tweezers	35
PTZ-43	36973	ESD Plastic-Tipped Tweezers	35
PTZ-45	37031	ESD Plastic-Tipped Tweezers	35
PTZ-46	37048	ESD Plastic-Tipped Tweezers	35
PTZ-51	37017	Ceramic-Tipped Tweezers	36
PTZ-61	37079	Black Coated ESD Tweezers	36
PTZ-62	37086	Black Coated ESD Tweezers	36
PTZ-63	37093	Black Coated ESD Tweezers	36
PTZ-64	37109	Black Coated ESD Tweezers	36
PTZ-91	36959	Spare Tip for PTZ-41	35
PTZ-92	36966	Spare Tip for PTZ-42	35
PTZ-93	36980	Spare Tip for PTZ-43	35
PTZ-94	37024	Spare Tip for PTZ-51	36
PTZ-95	37055	Spare Tip for PTZ-45	35
PTZ-96	37062	Spare Tip for PTZ-46	35
PW-05	Discon.	Water Pump Pliers	
PW-08	Discon.	Water Pump Pliers	23
PW-09	33996	Water Pump Pliers	23
PW-10	Discon.	Water Pump Pliers	23
PZ-01	39011	E-Ring Pliers	23
PZ-02	39028	E-Ring Pliers	23
PZ-10	Discon.	Snap Ring Pliers	
PZ-11	Discon.	Tip for Snap Ring Pliers 0.7S	
PZ-12	Discon.	Tip for Snap Ring Pliers 0.7C	
PZ-13	Discon.	Tip for Snap Ring Pliers 1.4S	
PZ-14	Discon.	Tip for Snap Ring Pliers 1.4C	
PZ-16	39165	Snap Ring Pliers	23
PZ-17	39172	Snap Ring Pliers	23
PZ-18	39189	Snap Ring Pliers	23
PZ-19	39196	Snap Ring Pliers	23
PZ-22	39004	Screw Eater	3
PZ-32	39325	Screw Removal Pliers JS	6
PZ-55	39554	Screw Removal Pliers	5
PZ-56	39561	Screw Removal Pliers XP	5
PZ-57	39578	Screw Removal Pliers M2	5
PZ-58	39585	Screw Removal Pliers GT	4
PZ-59	39592	Screw Removal Pliers RX	4
PZ-60	39622	Screw Removal Pliers Z	4
PZ-64	39677	Screw Removal Locking Pliers	6
PZ-65	39684	Screw Removal Locking Pliers	6
PZ-66	39691	Screw Removal Locking Pliers	6
PZ-77	39776	Screw Removal Pliers GTV	2
PZ-78	39783	Side Cutting Pliers	3
PZ-79	39790	Shear Pliers	14
PZ-81	39813	Slip Joint Pliers	7
PZM-30	39646	Pliers Mask for PZ-32	6
PZM-58	39639	Pliers Mask for PZ-58	4

SD-06	Discon.	Digital Multimeter	
SD-07	Discon.	Iron Thermometer	
SD-10	57107	Digital Multimeter	77
SD-20	57206	Desoldering Tool	74
SD-21	57213	Heater Holder	74
SD-22	57220	Heater Assy	74
SD-23	57237	Pipe Setter	74
SD-24	57244	Filter Cartridge	74
SD-25	57251	Seat Valve	74
SD-26	57268	Diaphragm	74
SD-29	Discon.	Filter Pipe	
SD-30	Discon.	Smd Accessory Kit	
SD-31	Discon.	Stainless Wire Reel	
SD-58	Discon.	Sensor Probe	
SD-60	57602	Tool Stand for SD-20	74
SD-61	57619	φ0.8 Tip for SD-20	74
SD-62	57626	φ1.0 Tip for SD-20	74
SD-63	57633	φ1.5 Tip for SD-20	74
SD-86	Discon.	Hot Air Nozzle	
SD-87	57879	Tapering Slim Tip	74
SD-88	57886	Tapering Slim Tip	74
SH-10	54106	Replacement Heater (100V)	70
SH-12	54120	Replacement Heater (220-240V)	71
SH-20	54205	Replacement Heater (100V)	70
SK-14	Discon.	Soldering Iron (Mica)	

Item No.	49898330-	Item	Page
SK-30	50306	Soldering Iron	70.71
SK-31	50313	Soldering Iron	70.71
SK-32	50320	Soldering Iron (100V)	70
SK-40	50405	Soldering Iron (100V)	70
SK-41	50412	Soldering Iron (100V)	70
SK-42	50429	Tapered Needle for SKM-40	73
SK-43	50436	Chisel for SKM-40	73
SK-44	50443	φ2mm Spade for SKM-40	73
SK-45	50450	Chisel for SKM-40	73
SK-46	50467	Hot Blow Tip for SKM-40	73
SK-47	50474	Ejector Unit for SKM-40	73
SK-50	Discon.	Kotelyzer	
SK-51	Discon.	Tapered Needle for SK-50	
SK-52	Discon.	Chisel for SK-50	
SK-53	Discon.	φ2mm Spade for SK-50	
SK-54	Discon.	Chisel for SK-50	
SK-55	Discon.	Hot Blow Tip for SK-50	
SK-56	Discon.	Hot Blow Tip for SK-50	
SK-57	Discon.	Ejector Unit for SK-50	
SK-61	50610	Tapered Needle for SK-60	72
SK-62	50627	Chisel for SK-60	72
SK-63	50634	φ2mm Spade for SK-60	72
SK-64	50641	Chisel for SK-60	72
SK-65	50658	Hot Blow Tip for SK-60	72
SK-66	50665	Hot Blow Tip for SK-60	72
SK-67	50672	Hot Knife for SK-60	72
SK-68	50689	Ceramic Unit for SK-60	72
SK-70	Discon.	Kotelyzer	
SK-71	50719	Tapered Needle for SK-70	73
SK-72	50726	Chisel for SK-70	73
SK-73	50733	φ2mm Spade for SK-70	73
SK-74	50740	φ3mm Spade for SK-70	73
SK-75	50757	Tapered Needle for SK-70	73
SK-76	50764	φ2mm Spade for SK-70	73
SK-77	50771	Tapered Pyramid for SK-70	73
SK-78	50788	Offset Tapered Needle for SK-70	73
SK-79	50795	High Powered Chisel for SK-70	73
SK-80	50801	High Powered Round Head Needle for SK-70	73
SK-81	50818	High Powered Long Taper Chisel for SK-70	73
SK-82	50825	Hot Blow Tip for SK-70	73
SK-83	50832	Hot Blow Tip for SK-70	73
SK-84	50849	Hot Blow Tip for SK-70	73
SK-85	50856	Hook Fitting for SK-70	73
SK-88	50887	Protective Cap for SK-70	73
SK-89	50894	Cleaning Sponge for Kotelyzer	72.73
SK-90	50900	Gas Refill for Kotelyzer	73
SK-93	50931	Heat Shrink for SK-70	73
SK-94	50948	Heat Shrink for SK-70	73
SK-95	50955	Gas Refill for Kotelyzer	73
SK-96	50962	Ceramic Unit for SK-70	73
SKA-50	Discon.	Kotelyzer	
SKA-60	51051	Kotelyzer	72
SKA-70	51013	Kotelyzer	73
SKB-60	51068	Kotelyzer	72
SKB-70	51020	Kotelyzer	73
SKC-30	51303	Soldering Iron	70.71
SKC-31	51310	Soldering Iron	70.71
SKC-32	51327	Soldering Iron (100V)	70
SKC-40	51402	Soldering Iron (100V)	70
SKC-41	51419	Soldering Iron (100V)	70
SKC-60	51075	Kotelyzer	72
SKC-70	51037	Kotelyzer	73
SKD-70	51044	Kotelyzer	73
SKE-30	Discon.	Soldering Iron	
SKE-31	Discon.	Soldering Iron	
SKE-32	Discon.	Soldering Iron (100V)	
SKE-40	Discon.	Soldering Iron (100V)	
SKE-41	Discon.	Soldering Iron (100V)	
SKM-40	51082	Handy Kotelyzer	73
SL-01	58012	Inspection Mirror	79
SL-02	58029	Inspection Mirror	79
SL-03	Discon.	Inspection Mirror	
SL-04	58043	Desk-Top Loupe	79
SL-07	Discon.	Desk-Top Loupe	79
SL-11	58111	Inspection Mirror	79

Item No.	49898330-	Item	Page
SL-12	58128	Inspection Loupe	78
SL-22	58227	LED Light Loupe	79
SL-23	Discon.	LED Stand Loupe	79
SL-32	58326	LED Pocket Loupe	78
SL-33	58333	LED Pocket Loupe	78
SL-36	58364	Flashlight Loupe	79
SL-50	58500	Pocket Loupe	78
SL-51	58517	Pocket Loupe	78
SL-52	58524	Pocket Loupe	78
SL-53	58531	Pocket Loupe	78
SL-55	58555	Inspection Loupe	78
SL-56	58562	Inspection Loupe	78
SL-57	58579	Inspection Loupe	78
SL-58	Discon.	Inspection Loupe	
SL-60	Discon.	Stereo Microscope	
SL-62	Discon.	Microscope Cmos Camera	
SL-64	58968	Foldable Magnifier	78
SL-65	Discon.	Eyeiece with Micro Scale	
SL-66	Discon.	Eyeiece with Micro Scale	
SL-71	58715	Flashlight Loupe	79
SL-72	58722	Utility Loupe	78
SL-80	58807	Head Loupe	79
SL-81	58814	Head Loupe	79
SL-82	58821	Head Loupe	79
SL-83	58838	Head Loupe	79
SL-85	58852	Replacement Lens for Head Loupe	79
SL-86	58869	Replacement Lens for Head Loupe	79
SL-87	58876	Replacement Lens for Head Loupe	79
SL-88	58883	Replacement Lens for Head Loupe	79
SS-01	55011	Solder Sucker	75
SS-02	55028	Solder Sucker	75
SS-05	55059	Tip Cleaner	75
SS-08	55080	IC Extractor	72
SS-09	Discon.	Soldering Box	
SS-10	55103	PCB Connector Extractor	72
SS-11	55110	Replacement Nozzle	75
SS-15	Discon.	2P-3P Plug Converter	
SS-16	55165	Replacement Silicone Tubes	75
SS-20	Discon.	Iron Stand	75
SS-21	55219	Spring Hook	30
SS-22	55226	Spring Hook	30
SS-30	55301	Pin Extractor	29
SS-31	55318	Pin Extractor	29
SS-32	55325	Pin Extractor	29
SS-33	55332	Pin Extractor	29
SS-34	55349	Pin Extractor	29
ST-10	52102	Replacement Tip for SK-30	70
ST-11	52119	Replacement Tip for SK-30	70
ST-12	52126	Replacement Tip for SK-30	70
ST-13	52133	Replacement Tip for SK-30	70
ST-14	52140	Replacement Tip for SK-30	70
ST-20	52201	Replacement Tip	70.71
ST-21	52218	Replacement Tip	70.71
ST-22	52225	Replacement Tip	70.71
ST-23	52232	Replacement Tip	70.71
SW-11	56117	Solder	77
SW-12	56124	Solder	77
SW-13	56131	Solder	77
SW-21	56216	Solder	77
SW-22	56223	Solder	77
SW-23	56230	Solder	77
SW-30	56308	Solder	77
SW-31	56315	Solder	77
SW-32	56322	Solder	77
SW-33	56339	Solder	77
SW-41	56414	Solder	77
SW-42	56421	Solder	77
SW-43	56438	Solder	77
SW-51	56513	Solder	77
SW-52	56520	Solder	77
SW-53	56537	Solder	77
SWA-06	40062	Superiot RA Solder	76
SWA-08	40086	Superiot RA Solder	76
SWA-10	40109	Superiot RA Solder	76
SWA-12	40123	Superiot RA Solder	76

Item No.	49898330-	Item	Page
SWA-56	40567	Superiot RA Solder	76
SWA-58	40581	Superiot RA Solder	76
SWA-60	40604	Superiot RA Solder	76
SWA-62	40628	Superiot RA Solder	76
SWA-76	40765	Superiot RA Solder	76
SWA-78	40789	Superiot RA Solder	76
SWA-80	40802	Superiot RA Solder	76
SWA-82	40826	Superiot RA Solder	76
SWS-06	41069	Superiot RMA Solder	76
SWS-08	41083	Superiot RMA Solder	76
SWS-10	41106	Superiot RMA Solder	76
SWS-12	41120	Superiot RMA Solder	76
SWS-56	41564	Superiot RMA Solder	76
SWS-58	41588	Superiot RMA Solder	76
SWS-60	41601	Superiot RMA Solder	76
SWS-62	41625	Superiot RMA Solder	76
SWS-76	41762	Superiot RMA Solder	76
SWS-78	41786	Superiot RMA Solder	76
SWS-80	41809	Superiot RMA Solder	76
SWS-82	41823	Superiot RMA Solder	76
SWU-02	56056	Solder Wick	76
SWU-03	56063	Solder Wick	76
SWU-04	56070	Solder Wick	76
SWU-05	56087	Solder Wick	76
SWU-06	56094	Solder Wick	76

TD-03	Discon.	Twist Drill	
TD-04	Discon.	Twist Drill	
TD-05	Discon.	Twist Drill	
TD-06	Discon.	Twist Drill	
TD-07	Discon.	Twist Drill	
TD-08	Discon.	Twist Drill	
TD-09	Discon.	Twist Drill	
TD-10	Discon.	Twist Drill	
TD-12	Discon.	Twist Drill	
TD-15	Discon.	Twist Drill	
TD-16	Discon.	Twist Drill	
TD-18	Discon.	Twist Drill	
TD-20	Discon.	Twist Drill	
TD-25	Discon.	Twist Drill	
TD-30	Discon.	Twist Drill	
TD-32	Discon.	Twist Drill	
TD-35	Discon.	Twist Drill	
TD-40	Discon.	Twist Drill	
TD-50	Discon.	Twist Drill	
TD-60	Discon.	Twist Drill	
TDS-01	Discon.	Twist Drill Set	
TDS-02	Discon.	Twist Drill Set	
TDS-03	Discon.	Twist Drill Set	
TF-01	Discon.	File	
TF-02	Discon.	File	
TF-03	Discon.	File	
TF-04	Discon.	File	
TF-05	Discon.	File	
TF-06	65362	File	57
TF-07	65379	File	57
TF-10	65409	File	57
TF-11	65416	Jet Black File	58
TF-12	65423	Jet Black File	58
TF-13	65430	Jet Black File	58
TF-14	65478	Jet Black File	58
TF-15	65485	Jet Black File	58
TF-21	65447	Jet Black File	58
TF-22	65454	Jet Black File	58
TF-23	65461	Jet Black File	58
TF-24	65492	Jet Black File	58
TF-25	65508	Jet Black File	58
TF-31	66413	Jet Black File	58
TF-32	66420	Jet Black File	58
TF-33	66437	Jet Black File	58
TF-34	66444	Jet Black File	58
TF-35	66451	Jet Black File	58
TF-41	66468	Jet Black File	58
TF-42	66475	Jet Black File	58
TF-43	66482	Jet Black File	58

Item No.	49898330-	Item	Page
TF-44	66499	Jet Black File	58
TF-45	66505	Jet Black File	58
TFS-01	65515	File Set	58
TFS-02	65522	File Set	58
TFS-03	Discon.	File Set(Precise Type)	
TFS-04	Discon.	File Set(Precise Type)	
TFS-06	Discon.	File Set(Precise Type)	
TFS-07	65577	Jet Black File Set	58
TFS-10	65584	Jet Black File Set	58
TFS-20	65591	Jet Black File Set	58
TFS-30	65607	Jet Black File Set	58
TG-02	Discon.	Grinder	
TH-01	Discon.	Hammer	
TH-02	Discon.	Hammer	
TH-05	Discon.	Hammer	
TM-04	66246	Steel Rule	57
TM-05	66253	Steel Rule	57
TN-01W	60916	Jeweller's Saw	57
TN-02W	60923	Jeweller's Saw	57
TN-03W	60930	Jeweller's Saw	57
TN-04W	60947	Jeweller's Saw	57
TN-05W	60954	Jeweller's Saw	57
TN-11	61111	Saw Blade	57
TN-12	61128	Saw Blade	57
TN-13	61135	Saw Blade	57
TN-14	61142	Saw Blade	57
TN-15	61159	Saw Blade	57
TN-16	61166	Saw Blade	57
TN-17	61173	Saw Blade	57
TN-18	61180	Saw Blade	57
TP-20	60206	Mini Drill Chuck	56
TP-21	Discon.	Pin Vise	
TP-22	Discon.	Pin Vise	
TP-23	60237	Pin Vise	56
TP-24	60244	Pin Vise	56
TP-25	Discon.	Pin Vise(for Drilling Machine)	
TP-26	Discon.	Pin Vise(for Mini Motor)	
TP-28	Discon.	Pin Vise(for Mini Motor)	
TP-31	Discon.	Pick-Up Tool	
TP-33	60336	Pick-Up Tool	30
TP-34	60343	Pick-Up Tool	30
TP-35	60350	Magnetic Pick-Up Tool	30
TP-36	60367	Magnetic Pick-Up Tool	30
TR-01	66116	Taper Reamer	56
TR-02	66123	Taper Reamer	56
TR-03	66130	Taper Reamer	56
TR-04	66147	Taper Reamer	56
TR-11	66161	Reamer Bit with Hex. Shank	56
TS-01	Discon.	Mini Spanner Set	
TS-02	Discon.	Mini Spanner Set	
TS-04	63641	Mini Combination Spanner Set	52
TS-05	63658	Open-End Wrench Set	52
TS-06	63665	Combination Wrench Set	52
TS-07	63672	Combination Wrench Set	52
TS-11	Discon.	Spanner(Flat Head)	
TS-12	Discon.	Spanner(Flat Head)	
TS-13	Discon.	Spanner(Flat Head)	
TS-14	Discon.	Spanner(Flat Head)	
TS-15	Discon.	Spanner(Flat Head)	
TS-21	Discon.	Spanner(Inclined Head)	
TS-22	Discon.	Spanner(Inclined Head)	
TS-23	Discon.	Spanner(Inclined Head)	
TS-24	Discon.	Spanner(Inclined Head)	
TS-25	Discon.	Spanner(Inclined Head)	
TS-41	62811	Combination Spanner	52
TS-42	62828	Combination Spanner	52
TS-43	62835	Combination Spanner	52
TS-44	62842	Combination Spanner	52
TS-45	62859	Combination Spanner	52
TS-46	62866	Combination Spanner	52
TS-47	62873	Combination Spanner	52
TS-48	62880	Combination Spanner	52
TT-01	65010	Tap Handle	56
TT-02	65027	Tap Handle	56
TT-03	65034	Tap Set	56

Item No.	49898330-	Item	Page
TT-10	65102	Tap	56
TT-11	65119	Tap	56
TT-12	65126	Tap	56
TT-13	65133	Tap	56
TT-14	65140	Tap	56
TT-15	65157	Tap	56
TT-16	65164	Tap	56
TV-01	Discon.	Bench Vise	
TV-02	Discon.	Bench Vise	
TV-03	Discon.	Bench Vise	
TV-04	Discon.	Bench Vise	
TV-11	Discon.	Anvil Vise	
TV-12	Discon.	Anvil Vise	
TV-13	Discon.	Anvil Vise	
TV-14	Discon.	Anvil Vise	
TV-25	65850	Yankee Vise	57
TV-26	65867	Yankee Vise	57
TV-27	65874	Yankee Vise	57
TV-31	Discon.	Clamp	
TV-32	Discon.	Clamp	
TV-34	Discon.	Clamp	
TWB-00	Discon.	Ball Point Hex Wrench	
TWB-01	62019	Ball Point Hex Wrench Set (Long)	53
TWB-02	62026	Ball Point Stubby Wrench Set	53
TWB-04	62040	Ball Point Wrench Set (Short)	53
TWB-05	62057	Ball Point Stubby Wrench Set	53
TWB-13	62132	Ball Point Hex Wrench	53
TWB-15	62156	Ball Point Hex Wrench	53
TWB-20	62200	Ball Point Hex Wrench	53
TWB-25	62255	Ball Point Hex Wrench	53
TWB-30	62309	Ball Point Hex Wrench	53
TWB-40	62408	Ball Point Hex Wrench	53
TWB-50	62507	Ball Point Hex Wrench	53
TWB-60	62606	Ball Point Hex Wrench	53
TWB-80	62804	Ball Point Hex Wrench	53
TWH-01	63016	Hex Key Wrench Set	53
TWH-02	63023	Hex Key Wrench Set	53
TWH-04	63047	Hex Key Wrench Set	53
TWH-11	63115	Hex Key Wrench	53
TWH-12	63122	Hex Key Wrench	53
TWH-13	63139	Hex Key Wrench	53
TWH-14	63146	Hex Key Wrench	53
TWH-15	63153	Hex Key Wrench	53
TWH-16	63160	Hex Key Wrench	53
TWH-17	63177	Hex Key Wrench	53
TWH-18	63184	Hex Key Wrench	53
TWH-20	63207	Hex Key Wrench	53
TWH-21	63214	Hex Key Wrench	53
TWH-22	63221	Hex Key Wrench	53
TWH-23	63238	Hex Key Wrench	53
TWH-24	63245	Hex Key Wrench	53
TWH-25	63252	Hex Key Wrench	53
TWH-26	63269	Hex Key Wrench	53
TWM-01	63511	Adjustable Angle Wrench	51
TWM-02	63528	Adjustable Angle Wrench	51
TWM-03	63535	Smart Monkey Wrench	51
TWM-04	63542	Adjustable Angle Wrench	51
TWM-05	63559	Adjustable Angle Wrench	51
TWM-07	63573	Smart Monkey Wrench	51
TWM-08	63580	Smart Monkey Wrench	51
TWS-01	63412	Socket Wrench Set (Inch Size)	54
TWS-02	63429	Socket Wrench Set	54
TWS-03	63436	Socket Wrench Set	54
TWS-04	63443	Socket Wrench Set	54
TWS-05	63450	Socket Wrench Set	54
TZ-02	69025	Handy Saw	57
TZ-03	Discon.	Hack Saw	
TZ-04	69049	Replacement Blade	57
TZ-05	69056	Scriber	57
TZ-07	69070	Punch	57
TZ-08	Discon.	Anvil	
TZ-13	69131	Carbide Scribing Pen	57
TZ-14	69148	Automatic Center Punch	57

Item No.	49898330-	Item	Page
ZC-01	90012	Conductive Foam	81
ZC-02	90029	Conductive Foam	81
ZC-03	90036	Conductive Foam	81
ZC-11	Discon.	Super Oil Spray	
ZC-12	Discon.	Handy Grease Spray	
ZC-13	Discon.	Silicon Oil	
ZC-14	Discon.	Oil	
ZC-15	Discon.	Tap & Drill Oil	
ZC-16	Discon.	Rust Preventive	
ZC-17	Discon.	Silicon Grease	
ZC-18	Discon.	Super Grease	
ZC-19	90197	Oiler	84
ZC-28	90289	Rust Remover	84
ZC-28M	92054	Rust Remover Mist (100g)	84
ZC-29	90296	Rust Remover Foam (250g)	84
ZC-31	Discon.	Aero Duster	
ZC-32	Discon.	Aero Duster	
ZC-38	90388	Dust-Free Gloves (S)	82
ZC-39	90395	Dust-Free Gloves (M)	82
ZC-40	90401	Dust-Free Gloves (L)	82
ZC-41	90418	Dust-Free Gloves (S)	82
ZC-42	90425	Dust-Free Gloves (M)	82
ZC-43	90432	Dust-Free Gloves (L)	82
ZC-44	90449	Static Conductive Gloves (S)	82
ZC-45	90456	Static Conductive Gloves (M)	82
ZC-46	90463	Static Conductive Gloves (L)	82
ZC-47	90470	Static Conductive Gloves (S)	82
ZC-48	90487	Static Conductive Gloves (M)	82
ZC-49	90494	Static Conductive Gloves (L)	82
ZC-50	90500	Wrist Strap	81
ZC-51	90517	Anti-Static Gloves (S)	82
ZC-52	90524	Anti-Static Gloves (M)	82
ZC-53	90531	Anti-Static Gloves (L)	82
ZC-54	90548	Anti-Static Gloves (S)	82
ZC-55	90555	Anti-Static Gloves (M)	82
ZC-56	90562	Anti-Static Gloves (L)	82
ZC-62	90623	Ground Cord	83
ZC-63	90630	Connective Plate	83
ZC-70	Discon.	Flux	
ZC-71	Discon.	Flux Dispenser	
ZC-80	90807	Anti-Static Service Kit	81
ZC-82	90821	Static Conductive Bag	82
ZC-84	90845	Static Conductive Bag	82
ZC-86	90869	Static Conductive Bag	82
ZC-92	90920	Anti-Static Bag	82
ZC-94	90944	Anti-Static Bag	82
ZC-96	90968	Anti-Static Bag	82
ZCM-01	91217	Conductive Colored Mat 10M	83
ZCM-02	91224	Conductive Colored Mat 2M	83
ZCM-03	91231	Conductive Colored Mat 1M	83
ZCM-04	91248	Conductive Colored Mat 0.5M	83
ZCM-05	91255	Conductive Colored Mat 230x330	83
ZCM-06	91262	Conductive Colored Mat 320x450	83
ZCM-10	91309	Earth Cord	83